




# 8A Smart Battery Charger and Maintainer



**Safe and easy-to-use.**  
**For traditional and Stop/Start batteries.**

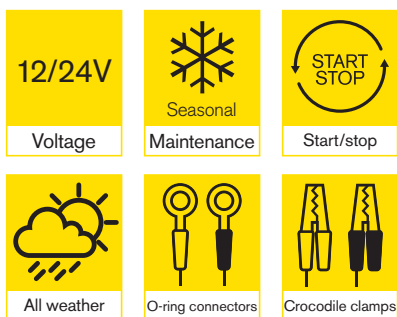

- **12 and 24V compatible**
- **Up to 4A or 8A charge rate selection**
- **Stop/Start compatible**
- **7-Stage charging process**
- **Large LCD display screen**  
Clearly shows voltage and charging progress
- **Cold weather charging mode**  
Protects batteries in cold temperatures
- **Quick connectors**  
With clamps or O-ring terminals for long term connection
- **One button operation for ease-of-use**
- **Backlit display can be seen in low light**
- **Reverse polarity protection**
- **Short-circuit protection**
- **Connect and be sure**  
Automatically adjusts to long-term maintenance mode when battery is full



## Specifications

Product Code	RSC808 (UK), RESC808 (EU)
Voltage Output	12/24V DC
Voltage Input	220-240V AC
Charger rate	12V: Up to 8A 24V Up to 4A
Battery Type	Lead Acid, Gel, Calcium, EFB & AGM
Max. Battery Capacity	12V: Up to 150Ah 24V: Up to 70Ah
Min. Battery Capacity	4Ah
Product Dimensions	H268 x W144 x D127mm
Case Quantity	4 x 1
Barcode	5055175245164 (UK), 5055175245225 (EU)

**Ring Automotive Limited** . Gelderd Road, Leeds, LS12 6NA United Kingdom  
Telephone +44 (0)113 213 2000 . Fax +44 (0)113 231 0266  
Email [autosales@ringautomotive.com](mailto:autosales@ringautomotive.com) . [www.ringautomotive.com](http://www.ringautomotive.com)  
[f](#) [t](#) [in](#) [v](#) /ringautomotive

CAT1376