




RCV9830

12/24V LED WARNING 388mm AMBER LIGHT BAR MAG MOUNT

Flash patterns:

1. Single flash 480ms
2. Single flash 800ms
3. Double flash 480ms
4. Triple flash 480ms
5. Quint flash 480ms
6. Middle triple flash two side triple flash 2100ms
7. Left and right split flash triple flash 1400ms
8. Rotation 840ms
9. Middle triple flash
+ two side triple flash
+ triple flash 2700ms
10. Cruise

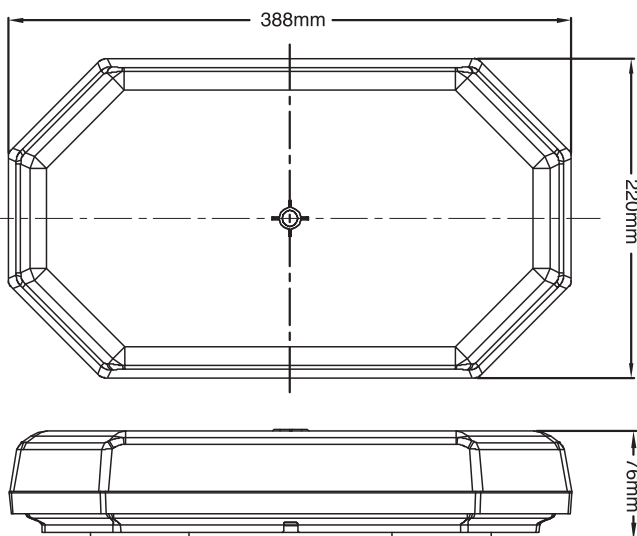

Specifications

Product Code	RCV9830
Function	Amber Mini Light Bar, MG
Wattage	Average 21W
Current Draw	13.5V: 1400mA~1800mA 28V: 700mA~860mA
Light Source	56 x 1W LED
Housing Material	Polycarbonate
Lens Material	Polycarbonate
Cable Length	2500mm sheath cable with double switch
Approval	ECE R65 Class 1, ECE R10, CISPR25 Class 3, IP69K
Barcode	5055175261256

Ring Automotive Limited

Gelder Road, Leeds, LS12 6NA United Kingdom
Telephone +44 (0)113 213 2000 . Fax +44 (0)113 231 0266
Email: autosales@ringautomotive.com . www.ringautomotive.com
 /ringautomotive

Authorised Representative:

OSRAM GmbH
Nonnendammallee 44, 13629 Berlin, Germany
Email: automotive-service@osram.com
www.osram.com




RCV9831

12/24V LED WARNING 388mm AMBER LIGHT SINGLE BOLT MOUNT

Flash patterns:

1. Single flash 480ms
2. Single flash 800ms
3. Double flash 480ms
4. Triple flash 480ms
5. Quint flash 480ms
6. Middle triple flash two side triple flash 2100ms
7. Left and right split flash triple flash 1400ms
8. Rotation 840ms
9. Middle triple flash
+ two side triple flash
+ triple flash 2700ms
10. Cruise

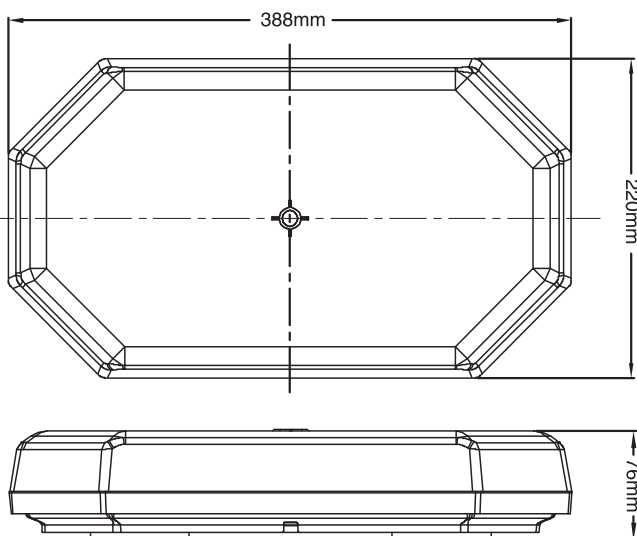

Specifications

Product Code	RCV9831
Function	Amber Mini Light Bar
Wattage	Average 21W
Current Draw	13.5V: 1400mA~1800mA 28V: 700mA~860mA
Light Source	56 x 1W LED
Housing Material	Polycarbonate
Lens Material	Polycarbonate
Cable Length	500mm sheath cable
Approval	ECE R65 Class 2, ECE R10, CISPR25 Class 3, IP69K
Barcode	5055175261263

Ring Automotive Limited

Gelder Road, Leeds, LS12 6NA United Kingdom
Telephone +44 (0)113 213 2000 . Fax +44 (0)113 231 0266
Email: autosales@ringautomotive.com . www.ringautomotive.com

[f](#) [i](#) [in](#) [yt](#) /ringautomotive

Authorised Representative:

OSRAM GmbH

Nonnendammallee 44, 13629 Berlin, Germany

Email: automotive-service@osram.com

www.osram.com




RCV9832

12/24V LED WARNING 694mm AMBER LIGHT BOLT MOUNT

Flash patterns:

1. Single flash (By Night)
2. Single flash (By Day)
3. Double flash (By Day)
4. Double flash (By Night)
5. Single flash (CT13)
6. Split single flash
7. Split triple flash
8. Middle triple flash two side triple flash
9. Middle triple flash
+ two side triple flash
+ triple flash
10. Cruise

12/24V	Reg 10	Reg 65	 x10	 IP69K
Voltage	Approved	Approved	Flash patterns	Waterproof

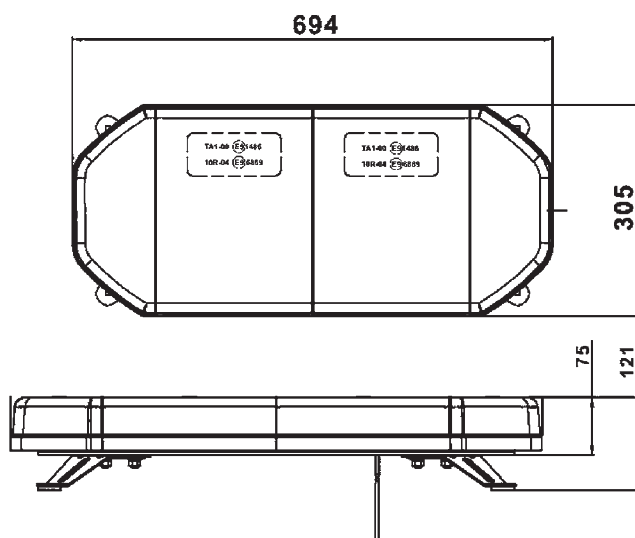

Specifications

Product Code	RCV9832
Function	Amber Light Bar
Wattage	Average: 65W
Current Draw	13.5V: 4.6~6.23A 28V: 2.1~2.84A
Light Source	100 x 1W LED
Housing Material	Polycarbonate
Lens Material	Polycarbonate
Cable Length	2500mm
Approval	ECE R65 Class 2, ECE R10, CISPR25 Class 3, IP69K
Barcode	5055175261270

Ring Automotive Limited

Gelderd Road, Leeds, LS12 6NA United Kingdom
Telephone +44 (0)113 213 2000 . Fax +44 (0)113 231 0266
Email: autosales@ringautomotive.com . www.ringautomotive.com
 /ringautomotive

Authorised Representative:

OSRAM GmbH
Nonnendammallee 44, 13629 Berlin, Germany
Email: automotive-service@osram.com
www.osram.com





RCV9833

12/24V LED WARNING 922mm AMBER LIGHT BOLT MOUNT

Flash patterns:

1. Single flash (By Night)
2. Single flash (By Day)
3. Double flash (By Day)
4. Double flash (By Night)
5. Single flash (CT13)
6. Split single flash
7. Split triple flash
8. Middle triple flash two side triple flash
9. Middle triple flash
+ two side triple flash
+ triple flash
10. Cruise

12/24V	Reg 10	Reg 65	 x10	 IP69K
Voltage	Approved	Approved	Flash patterns	Waterproof

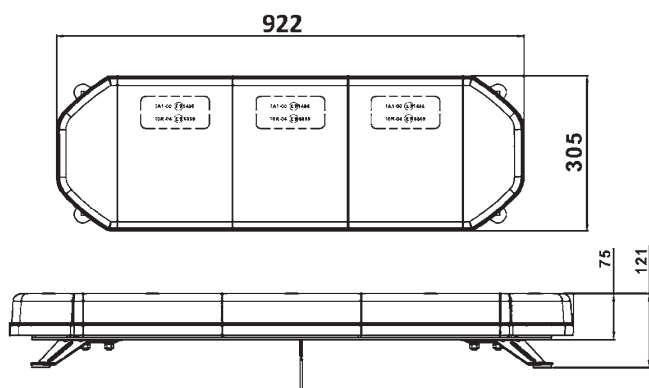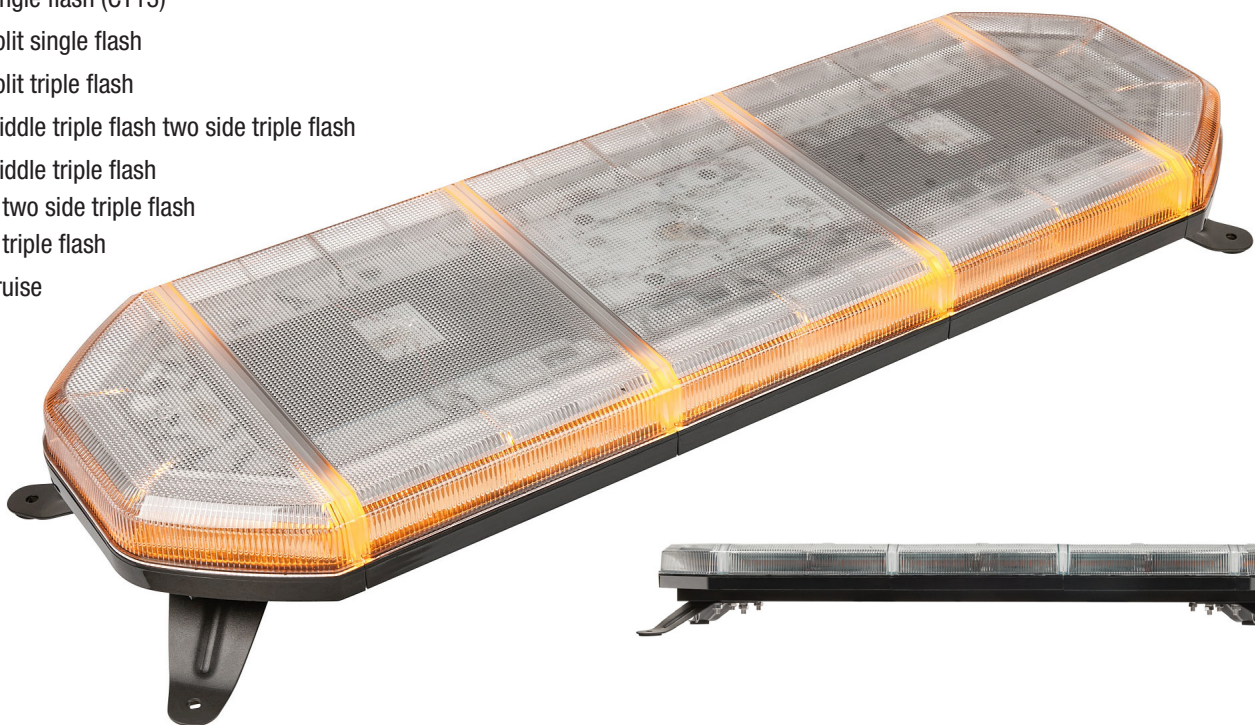

Specifications

Product Code	RCV9833
Function	Amber Light Bar
Wattage	Average: 70W
Current Draw	13.5V: 4.6~6.23A 28V: 2.1~2.84A
Light Source	132 x 1W LED
Housing Material	Polycarbonate
Lens Material	Polycarbonate
Cable Length	2500mm
Approval	ECE R65 Class 2, ECE R10, CISPR25 Class 3, IP69K
Barcode	5055175261287

Ring Automotive Limited

Gelder Road, Leeds, LS12 6NA United Kingdom
Telephone +44 (0)113 213 2000 . Fax +44 (0)113 231 0266
Email: autosales@ringautomotive.com . www.ringautomotive.com
    /ringautomotive

Authorised Representative:

OSRAM GmbH
Nonnendammallee 44, 13629 Berlin, Germany
Email: automotive-service@osram.com
www.osram.com





RCV9834

12/24V LED WARNING 1148mm AMBER LIGHT BOLT MOUNT

Flash patterns:

1. Single flash (By Night)
2. Single flash (By Day)
3. Double flash (By Day)
4. Double flash (By Night)
5. Single flash (CT13)
6. Split single flash
7. Split triple flash
8. Middle triple flash two side triple flash
9. Middle triple flash
+ two side triple flash
+ triple flash
10. Cruise

12/24V	Reg 10	Reg 65	 x10	 IP69K
Voltage	Approved	Approved	Flash patterns	Waterproof

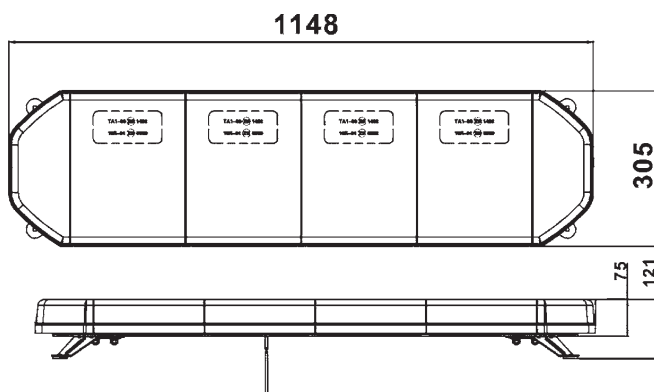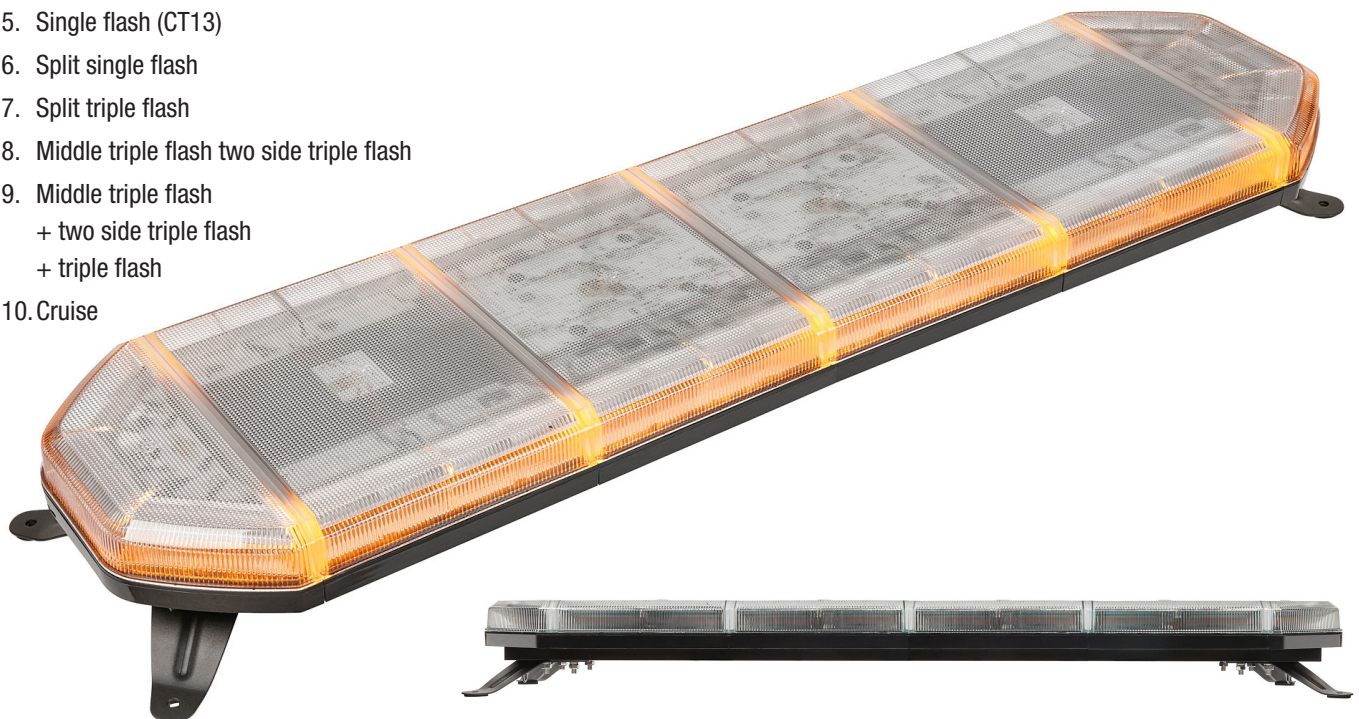

Specifications

Product Code	RCV9834
Function	Amber Light Bar
Wattage	Average: 75W
Current Draw	13.5V: 4.6~6.23A 28V: 2.1~2.84A
Light Source	164 x 1W LED
Housing Material	Polycarbonate
Lens Material	Polycarbonate
Cable Length	2500mm
Approval	ECE R65 Class 2, ECE R10, CISPR25 Class 3, IP69K
Barcode	5055175261294

Ring Automotive Limited

Gelder Road, Leeds, LS12 6NA United Kingdom
Telephone +44 (0)113 213 2000 . Fax +44 (0)113 231 0266
Email: autosales@ringautomotive.com . www.ringautomotive.com

    /ringautomotive

Authorised Representative:

OSRAM GmbH

Nonnendammallee 44, 13629 Berlin, Germany
Email: automotive-service@osram.com
www.osram.com




RCV9835

12/24V LED WARNING 1400mm AMBER LIGHT BOLT MOUNT

Flash patterns:


1. Single flash (By Night)
2. Single flash (By Day)
3. Double flash (By Day)
4. Double flash (By Night)
5. Single flash (CT13)
6. Split single flash
7. Split triple flash
8. Middle triple flash two side triple flash
9. Middle triple flash
+ two side triple flash
+ triple flash
10. Cruise

12/24V	Reg 10	Reg 65	 x10	 IP69K
Voltage	Approved	Approved	Flash patterns	Waterproof

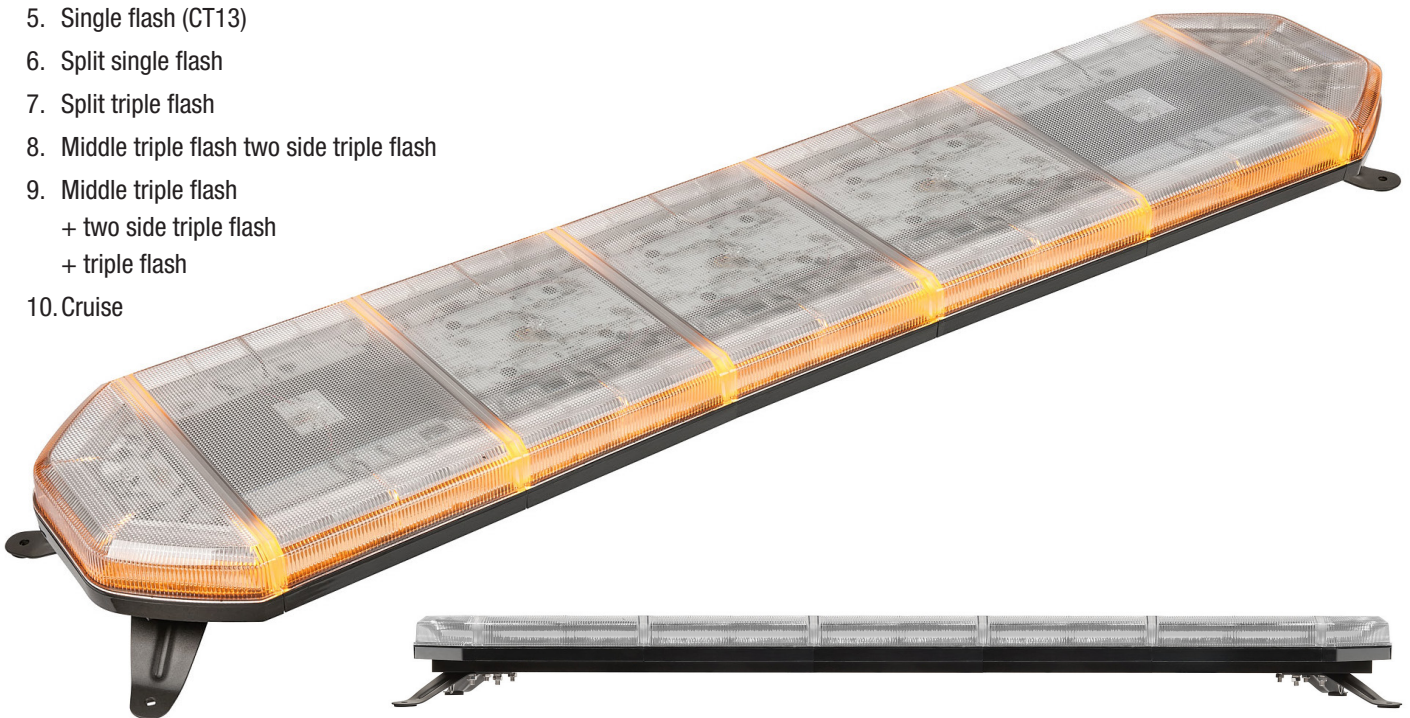

Specifications

Product Code	RCV9835
Function	Amber Light Bar
Wattage	Average: 80W
Current Draw	13.5V: 4.6~6.23A 28V: 2.1~2.84A
Light Source	196 x 1W LED
Housing Material	Polycarbonate
Lens Material	Polycarbonate
Cable Length	2500mm
Approval	ECE R65 Class 2, ECE R10, CISPR25 Class 3, IP69K
Barcode	5055175261300

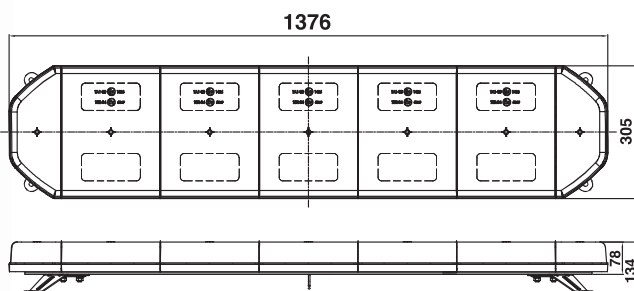

Ring Automotive Limited

Gelder Road, Leeds, LS12 6NA United Kingdom
Telephone +44 (0)113 213 2000 . Fax +44 (0)113 231 0266
Email: autosales@ringautomotive.com . www.ringautomotive.com
 /ringautomotive

Authorised Representative:

OSRAM GmbH
Nonnendammallee 44, 13629 Berlin, Germany
Email: automotive-service@osram.com
www.osram.com