



Light is motion

Light range 2020/2021

Global No.1 in Automotive Lighting

Light is OSRAM

OSRAM

Quite simply the best solution

OSRAM provides the perfect vehicle lamp for every use and every requirement, be it in cars, motorcycles, trucks or off-road, be it LED, xenon or halogen, and whether for performance or design-oriented drivers.

Category	Page
OSRAM Trust Program	04
Global No.1 in Automotive Lighting	06
Change lamps in pairs	07
LED portfolio overview	08
Xenon portfolio overview	14
Halogen portfolio overview	16
Off-road portfolio overview	21
LED lamps	
■ NIGHT BREAKER® H7-LED for Germany only	23
■ LEDriving® HL ²⁾	24
■ LEDriving® FL ²⁾	26
■ LEDriving® SL ²⁾	28
■ LEDriving® HL 24V ²⁾	30
Xenon	
■ XENARC® NIGHT BREAKER® LASER	35
■ XENARC® COOL BLUE® INTENSE	36
■ XENARC® ULTRA LIFE	37
■ XENARC® ORIGINAL	38
Halogen car	
■ NIGHT BREAKER® LASER	41
■ NIGHT BREAKER® SILVER	42
■ COOL BLUE® INTENSE	43
■ DIADEM® CHROME DIADEM®	44
■ ULTRA LIFE	46
■ ORIGINAL LINE 12 V	48
■ MINIBOX	51
Halogen truck	
■ TRUCKSTAR® PRO	53
■ ORIGINAL LINE 24 V	54
■ Spare lamp kit 24V	56
Halogen motorcycle	
■ NIGHT RACER® 110	60
■ NIGHT RACER® 90	60
■ NIGHT RACER® 50	60
■ X-RACER®	62
■ ORIGINAL	62
Off-road	
■ SUPER BRIGHT PREMIUM ²⁾	
■ SUPER BRIGHT ²⁾	65
■ XENARC® COOL BLUE® BOOST ²⁾	
■ COOL BLUE® BOOST ²⁾	66

Category	Page
LED fixtures	
■ LEDriving® headlights	70
■ LEDriving® XENARC® headlights	74
■ LEDriving® dynamic mirror indicator	76
■ LEDriving® tail lights	80
■ LEDriving® driving lights	82
■ LEDriving® working lights	86
■ LEDriving® daytime running lights	88
■ LEDambient® ²⁾	90
LED accessories	
■ LEDinspect®	94
■ LEDinspect®	97
■ LEDguardian® ³⁾	102
■ ONYX COPILOT®	104
Tools	
Automotive lamp cabinet, Shelf Rack, MINIWATT® assortment box	107
POS product presentation and demonstration	108
Measurements	110
Bases	118
Index	120
Summary of types and applications	136
Order information	144

■ = INNOVATION ■ = PERFORMANCE ■ = DESIGN ■ = COMFORT ■ = ORIGINAL

1) Please note: This catalogue contains an international portfolio. Several countries do not allow sale and use of non-ECE approved products.

Please contact your local distributor for information on the availability in your country.

2) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.

3) Not approved as warning light according to German Road Traffic Licensing Regulations (StVZO). Not for sale in Germany.

All OSRAM 12 V and 24 V halogen automotive lamps are UV-reduced, can replace existing lamps and meet the relevant standards, e.g. ECE R37 (with the exception of OFF-ROAD lamps)



The OSRAM Trust Program

Verify genuine lamps. Ensure OSRAM quality.

Works for all xenon lamps. Now also for halogen lamps in DUO BOXES. As the leading manufacturer of automotive lighting, OSRAM is synonymous with quality and high-performance products. Unfortunately, more and more counterfeit lamps are making their way into the market, undermining confidence and posing a threat to safety. These sometimes indistinguishable fakes can be both expensive and dangerous to you and others.

Fake lamps can cause real danger

The risks

Installing counterfeit lamps in a vehicle can have serious consequences. These products may not only impact the safety of road users but can also damage parts of the car or motorcycle.

- **Shorter lifetime**
leads to unexpected failure
- **Poor light performance**
results in low visibility
- **Overheating**
causes damage to headlights



The OSRAM advantage

Tried and trusted automotive lighting.

Safety

- High brightness for improved road visibility
- Greater visibility for oncoming traffic

Quality

- Maintain integrity of headlights
- Does not hamper electronic components (control units, airbags, communication systems, etc.)
- Longer lifespan of high-quality products

Compliance

- Manufactured according to all requirements of the ECE standard
- Approved for use on roads

Sustainability

- Buying genuine lamps helps reputable manufacturers maintain quality levels and develop new technology
- Reducing demand discourages production of dangerous fakes

How to check your lamps

Two steps to certainty

As part of the OSRAM Trust Program, we have implemented two safety features into the manufacturing process. You can use these features to verify your lamp(s) in just a few seconds on our online checking tool.

Online checking tool

Visit osram.com/trust or scan the QR code on your product using a smartphone or tablet device, and take the following steps:

1

Enter the **7-digit label code** which can be found on every genuine OSRAM xenon and halogen DUO BOX packing produced after November 2019. This will be auto-filled when using the QR code.



2

Next, you will be asked whether the automatically prompted lamp data matches either the **unique lamp code**, on the base of your xenon lamps OR **the product family and OSRAM order no** on your halogen DUO BOX.



The moment of truth

Please decide whether the data matches or not. Use either the “Yes” or “No” button on the page. After doing so, you’ll receive one of three possible outcomes.

Yes → Genuine

Packaging is authenticated and lamp data is correct.

→ You have purchased original OSRAM lamps

Possible issues

Packaging is authenticated but the label code has been entered too often.

→ Contact OSRAM customer service via trust-com@osram.com

No → No match

Invalid label code or the prompted lamp data doesn't match with your product(s).

→ Contact your dealer or OSRAM customer service

200 best reasons for OSRAM – the number 1 worldwide


On average, around 200 lamps are fitted in every car – that's 200 times top quality from OSRAM, the global leader in lighting solutions on and in your vehicle. OSRAM is a leader in innovation and technology, and sells the highest volume of lamps in the fast growing OEM market for cars, as well as in the rapidly expanding market for replacement lamps.

From the headlights to the rear lights

No matter where you look in a car, you will find lights. Their possible applications are immense. Several examples show the many different ways that OSRAM products manufactured across the world are used.

Here you can see the wide range of possible applications of lights in cars.

Greater Performance, enhanced safety and a modern design are the trends for modern vehicle lighting – and also the focus of our research.

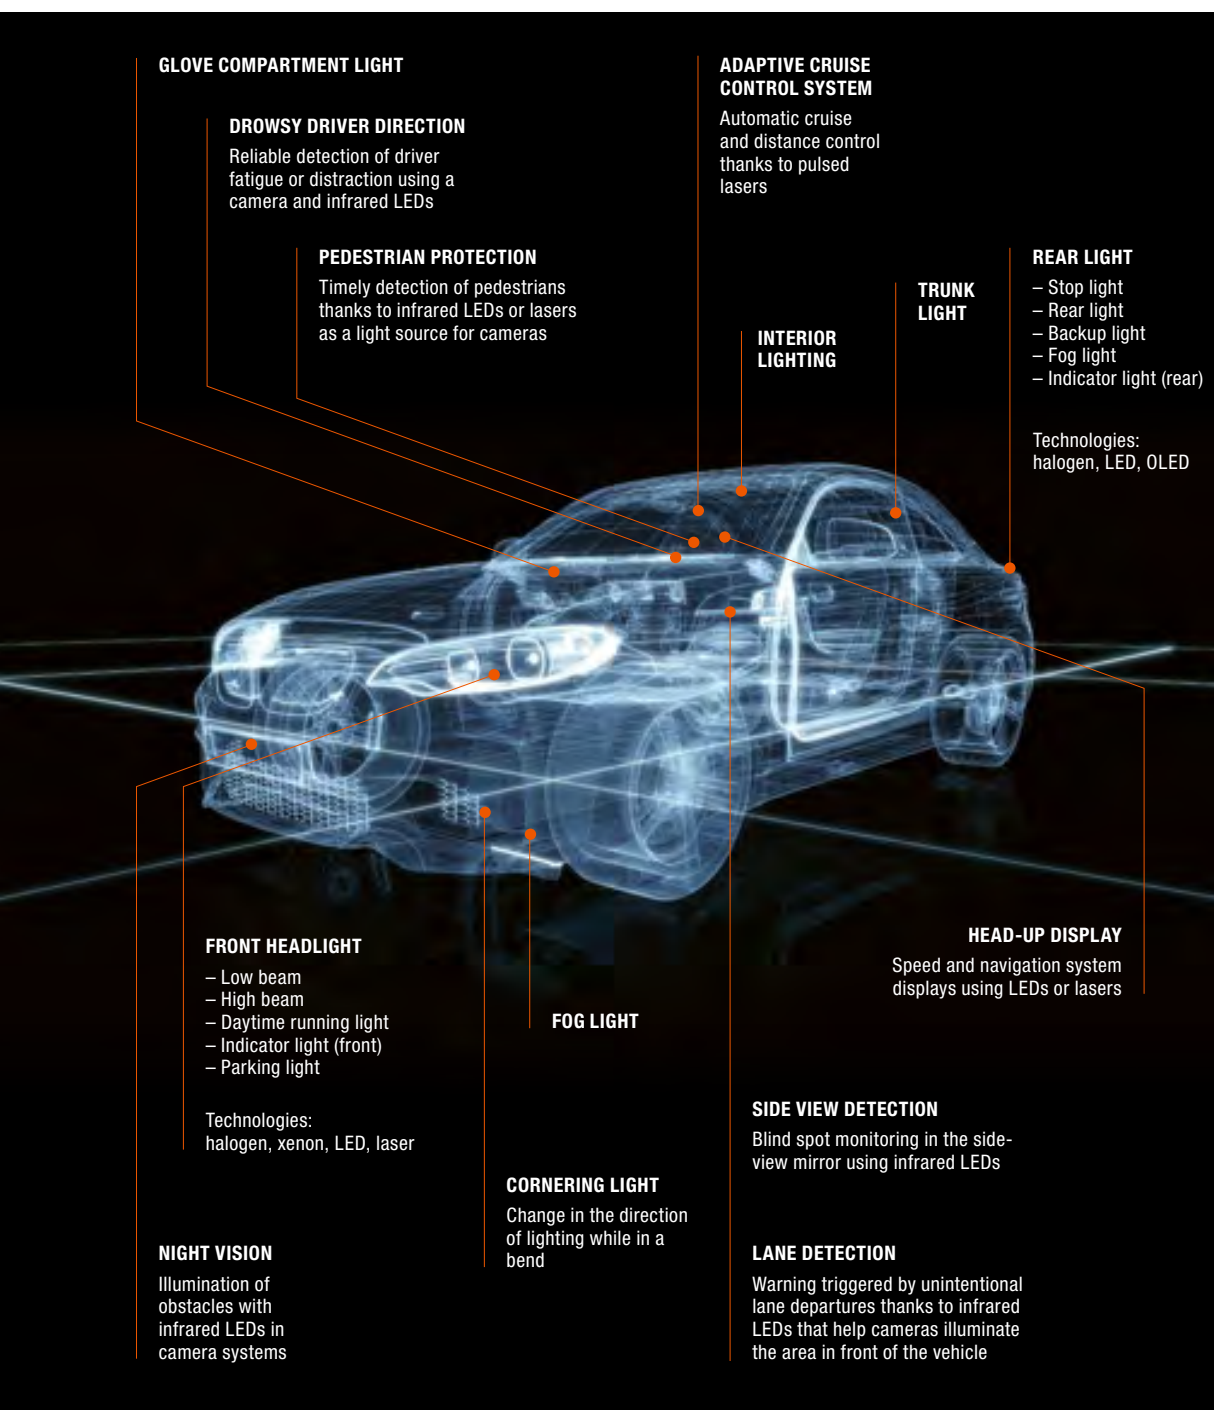

Are you passionate about your car service?

Yes

No

OK, maybe this job isn't for you.



How do you feel about mullets?

I could pull it off.

Love the confidence. Let's talk about sports.



Are you a football fan?

Great! Staying up to date isn't just good for your style. It's smart business too.

Please, don't remind me. Cringe!

Unlike an 80's haircut, your service offering is looking good.

Be innovative - Impress customers with the latest car light upgrades.

Ole, ole ...

Not so much.

So cars are your one true passion?



I like to go fast, what can I say.

Just like rally drivers, car lights always come in pairs.

Be smart - Change car lights in pairs to help keep your customers safe.

Did your team win their last game?

*silent sobbing

Oh, yes!

Unlike your favourite sports team, you won't let your customers down.

Be proactive - Check & change customers' car lights before they break so everybody wins.

And the game before that?

*deathly stare

The choices you make say a lot about the things you care about most. Show your customers that you really care about their sight and safety.

Use our **three Facts of Light** to help them choose the right high-quality OEM and upgrade automotive light. And remember, if it's not bright, it's not right. Find out more osram.de/notbright-notright



Portfolio overview LED



>> Page 23

INNOVATION / LED RETROFITS

NIGHT BREAKER® LED¹⁾



Street legal low beam H7-LED

NIGHT BREAKER® H7-LED is the first LED retrofit for low beam that is approved in Germany. The plug-and-play solution offers drivers significant advantages: very high cool white color temperature of 6,000 Kelvin with up to 220 % more brightness compared to the minimum requirements of ECE R112, up to 5 times longer lifespan compared to halogen lamps and an additional 50 % less glare.

Range

PX26d (H7)



>> Page 24

INNOVATION / LED RETROFITS

LEDriving® HL²⁾ LED high and low beam



Light in a new dimension

The OSRAM LED high and low beam lamps represent the most convenient solution in order to upgrade your existing headlights – providing a stylish cool white look with 6,000 K as well as improved visibility for everything that lies ahead of you.

Range

P14.5s (H1), P43t (H4), PX26d (H7), PGJ19-2 (H11), P22d (HB4)



>> Page 26

INNOVATION / LED RETROFITS

LEDriving® FL²⁾ LED fog lamp



Light is maximum visibility

The new LEDriving® FL as socket solution provides an upgrade for conventional fog lamps with LED technology and a color temperature of 6,000 K. These LED fog lamps matches perfectly existing LED daytime running lights and xenon low- and high-beam systems.

Range

PGJ19 (H8/H11/H16), PY20d (H10), PG20-7 (PSX24W)

1) Approved H7-LED low beam for Germany. Valid only for the vehicle models required in the ABG. §22a StVZO is paper printout as well as carrying a general type approval (ABG). Use only in right-hand traffic. Driving in left-hand traffic (e.g. England) requires upgrading to halogen lamps.



>> Page 28

INNOVATION / LED RETROFITS

LEDriving® SL²⁾ LED interior and exterior signal lamps**Wide range of different bases and different light colors**

Perfect for a multitude of applications, OSRAM LED signal lamps LEDDriving® SL illuminate vehicle exteriors and interiors with high color temperatures of up to 6,000 K – simply replace old lamps with OSRAM's LED plug-and-play solution.

Range

PG18.5d-1 (P13W), PG20-1 (PS19W), W2.1x9.5d (W5W/WY5W), W2.1x9.5d (W16W), SV8.5-8 (Festoon 31 mm), SV8.5-8 (C5W 36 mm), SV8.5-8 (Festoon 41 mm), BA15s (P21W), BAU15s (PY21W), W3x16q (W21/5W), W3x16d (W21W), WX3x16d (WY21W), BAY15d (P21/5W), W2.5x16q (P27/7W), BA9s (T4W)



>> Page 30

INNOVATION / LED RETROFITS

LEDriving® HL²⁾ 24 V**Highly energy-efficient bright LED light**

Simply replace old truck lamps with OSRAM's LED replacement lamps for forward lighting to benefit from highly energy-efficient bright LED light. LEDDriving® HL for high and low beam applications 24 V compatible and stand out with very compact design, high compatibility and easy installation.

Range

P43t (H4), PX26d (H7), PGJ19-2 (H11), P22d (HB4)

2) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.



>> Page 70/74/80

INNOVATION / LED FIXTURES

LEDriving® headlight¹⁾
LEDriving® XENARC® headlight²⁾
LEDriving® tail light



High efficiency meets extreme effectiveness

The OSRAM LEDDriving® headlights & tail lights offer high efficiency in combination with extreme effectiveness to impressively complement the individual look of your vehicle. These headlights & tail lights bring precise lighting technology to the front and the rear of your vehicle and onto the road.

Range

LEDHL102, LEDHL103, LEDHL104, LEDHL105, LEDHL107, LEDHL108, LEDTL101, LEDTL102



>> Page 76

INNOVATION / LED FIXTURES

LEDriving® dynamic mirror indicator¹⁾



Individual design meets innovative lighting technology

The OSRAM LEDDriving® dynamic mirror indicators offer individual design in combination with innovative lighting technology to impressively complement the unique look of your vehicle. The OSRAM LEDDriving® dynamic mirror indicators bring precise lighting technology to the side of your vehicle and onto the road.

Range

LEDDMI 5G0, LEDDMI 5K0, LEDDMI 3G0, LEDDMI F20, LEDDMI 8W0, LEDDMI 5F0, LEDDMI 8V0



>> Page 82

INNOVATION / LED FIXTURES

LEDriving® driving lights³⁾



Powerful performance and versatile applications

If the road and the surroundings are to be illuminated more intensively, the LEDDriving® driving lights facing this challenge with ease. Thanks to a variety of designs, shapes & light profiles, they convince with intense white LED light, at work & in the spare time, on dark country roads & forest paths, on-road & off-road.

Range

AX-, FX-, MX-, SX-, VX-SERIES

1) Refer to www.osram.com/am for detailed vehicle models

2) Only suitable for VW Golf VI and Ford Focus 3 cars with OEM halogen headlight

3) Special mounting regulations apply



>> Page 86

INNOVATION / LED FIXTURES

LEDriving® working lights**Professional light for professional work**

If the working environment and the surroundings are to be illuminated more intensively, the LEDDriving® working lights facing this challenge with ease. Thanks to a variety of designs, shapes & light profiles, they convince with intense white LED light, at work, on construction sites, agricultural activities, in forest operations & off-road tracks.

Range

MX-, VX-SERIES



>> Page 88

INNOVATION / LED FIXTURES

LEDriving® daytime running lights**Stylish highlights for state-of-the-art headlights**

Innovative, easy-to-install light-guide and pixel solution with high-quality LED technology for low energy consumption and long lifetime: LEDDriving® daytime running lights are the right choice for drivers who want to increase visibility during the day and with an eye for design.

Range

LG, PX-5



>> Page 90

INNOVATION / LED STYLING LIGHTS

LEDAmbient®**Interior ambient lighting**

The LEDAmbient® interior lights enable you to illuminate every single corner of your car. The high brightness of the products combined with the modern color temperatures puts your car into a new light. The LED strips are rapidly and easily mounted.

RangeTUNING LIGHTS BASE KIT⁴⁾,
TUNING LIGHTS EXTENSION KIT⁴⁾,
INTERIOR STRIP Kit⁴⁾

4) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.



>> Page 94

INNOVATION / LED INSPECTION LIGHTS

LEDinspect®



Essential to your garage

The LEDinspect® inspection lights are especially developed for the complex maintenance and repairs you tackle every day in your garage. Each unique lamp design reflects an understanding of professional applications and supplies light precisely where you need it.

Range

SLIMLINE 500, POCKET 280, PENLIGHT 150 UV-A, PENLIGHT 150, BONNET 1400, SLIMLINE 280



>> Page 97

INNOVATION / LED INSPECTION LIGHTS

LEDinspect®



Essential to your DIY toolbox

The rechargeable or battery-operated LED inspection lights are ideal for use at home. Equipped with durable, high-power LEDs, the luminaires provide optimum illumination for even the tightest spaces and difficult-to-access locations.

Range

HEADLAMP 300, PROFESSIONAL 150, SLIMLINE 250, FLASHLIGHT 15, POCKET 160, PENLIGHT 80, MINI 125, FOLDABLE 80, MN CP 80, PRO 180, FLOOD 10W, FLOOD 20W, HELI 1000, Space1000



>> Page 102

INNOVATION / LED WARNING LIGHTS

LEDguardian®



Prepared for serious situations

OSRAM LEDguardian® warning lights are the ideal LED accessory for drivers who want to be equipped for any situation.

Range

SAVER LIGHT PLUS¹⁾, ROAD FLARE¹⁾



>> Page 104

INNOVATION / LED READING LIGHTS

ONYX COPILOT®



Good light for a good ride

ONYX COPILOT® is a flexible LED reading light with pleasantly warm, glare-free light. With its high flexibility, the ONYX COPILOT® light has a wide range of options for illuminating specific areas of the vehicle interior.

Range

ONYX-USB, ONYX M+7, ONYX L+7

¹⁾ Not approved as warning light according to German Road Traffic Licensing Regulations (StVZO). Not for sale in Germany.

Portfolio overview xenon




>> Page 35

PERFORMANCE

XENARC® NIGHT BREAKER® LASER

UP TO +200% BRIGHTNESS¹⁾

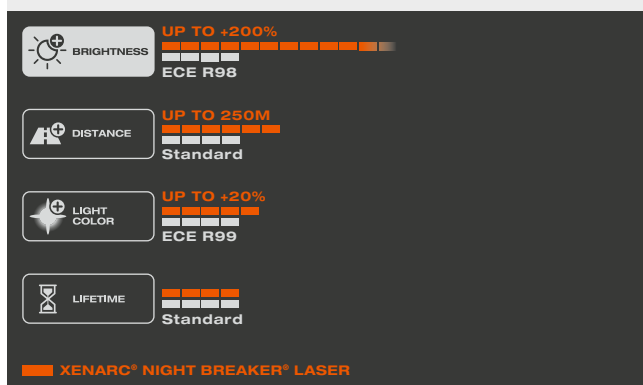

ECE/Range

D1S, D2S, D3S, D4S



>> Page 36

DESIGN

XENARC® COOL BLUE® INTENSE

XENON EXTRA BLUE



ECE/Range

D1S, D1R, D2S, D2R, D3S, D4S


1) Compared to minimum ECE R98 requirements



>> Page 37

COMFORT

XENARC® ULTRA LIFE

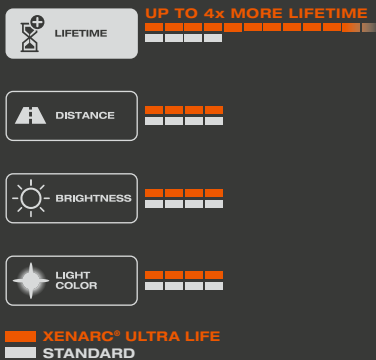**10-YEAR OSRAM
GUARANTEE²⁾**
**ECE/Range**


D1S, D2S, D3S, D4S



>> Page 38

ORIGINAL

XENARC® ORIGINAL

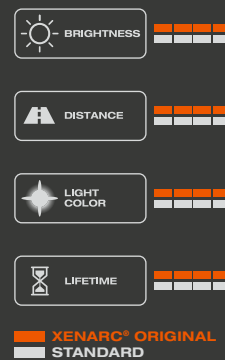ORIGINAL SPARE PART
**ECE/Range**

D1S, D1R, D2S, D2R, D3S, D3R, D4S, D4R, D5S, D8S

2) With online product registration. Refer to www.osram.com/am-guarantee for precise conditions and registration

Portfolio overview halogen car




>> Page 41

PERFORMANCE

NIGHT BREAKER® LASER

**UP TO +150%
BRIGHTNESS¹⁾**

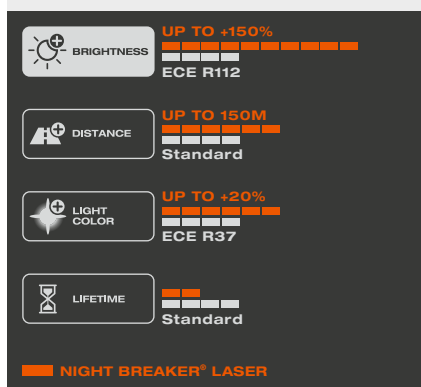

ECE/Range

H1, H3, H4, H7, H8, H11, HB3, HB4




>> Page 42

PERFORMANCE

NIGHT BREAKER® SILVER

**UP TO +100%
BRIGHTNESS¹⁾**

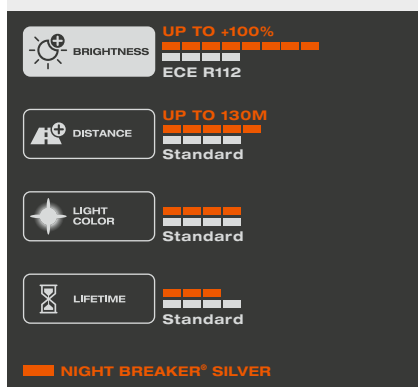

ECE/Range

H1, H4, H7, H11




>> Page 43

DESIGN

COOL BLUE® INTENSE

XENON LOOK

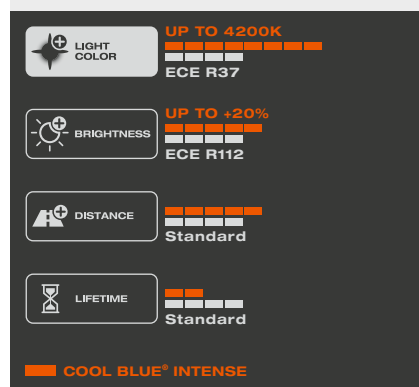

ECE/Range

H1, H3, H4, H7, H8, H11, H15, H16, H27W/1, H27W/2, HB3, HB4, HIR2, W5W

¹⁾ Compared to minimum ECE R112 requirements




>> Page 44

DESIGN

DIADEM® CHROME / DIADEM®

**AMBER / RED
WHEN ON**

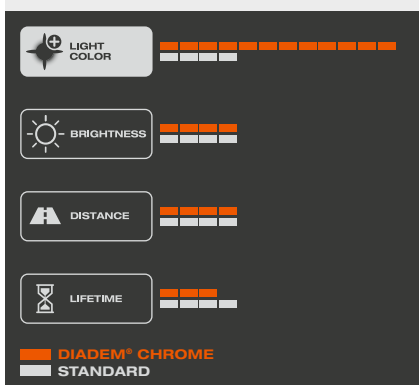

ECE/Range

WY5W, PY21W, PR21W, PR21/5W




>> Page 46

COMFORT

ULTRA LIFE

**4-YEAR OSRAM
GUARANTEE²⁾**

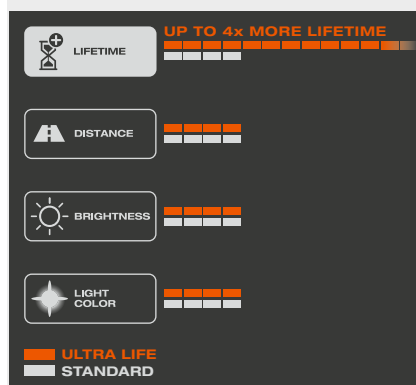

ECE/Range

H1, H4, H7, H11, P21W, PY21W, P21/5W, W5W, R5W, R10W, C5W, H6W, HY21W




>> Page 48

ORIGINAL

ORIGINAL

**ORIGINAL
SPARE PART**

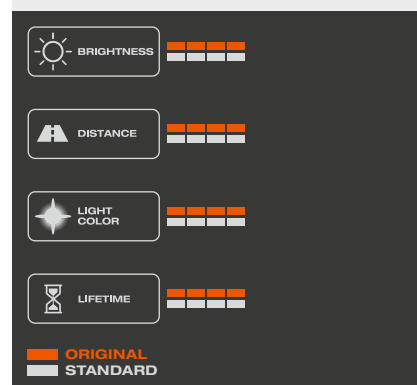

ECE/Range

Complete Product Range

²⁾ 4th year with online product registration. Refer to www.osram.com/am-guarantee for precise conditions and registration

Portfolio overview halogen truck




>> Page 53

PERFORMANCE

TRUCKSTAR® PRO

UP TO +100% BRIGHTNESS¹⁾

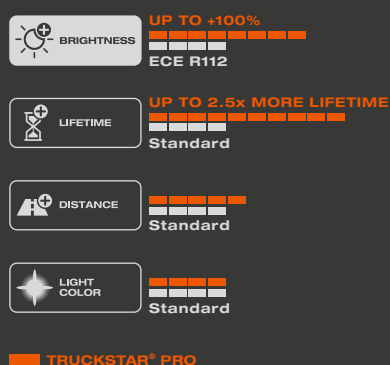

ECE/Range

H1, H3, H4, H7, H11, PY21W, P21W, P21/5W, W5W, R5W, R10W, T4W




>> Page 54

ORIGINAL

ORIGINAL

ORIGINAL SPARE PART

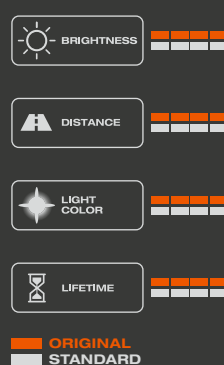

ECE/Range

Complete Product Range

Portfolio overview halogen motorcycle




>> Page 60

PERFORMANCE

NIGHT RACER® 110

**UP TO +110%
BRIGHTNESS¹⁾²⁾**

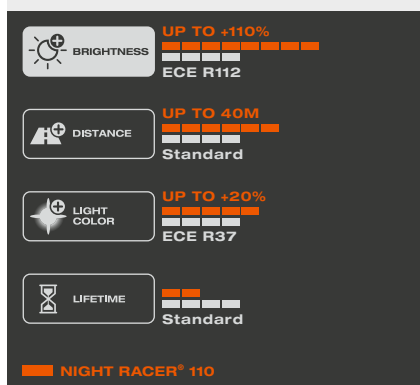

ECE/Range

H4, H7, H8, H11




>> Page 60

PERFORMANCE

NIGHT RACER® 90

**UP TO +90%
BRIGHTNESS¹⁾²⁾**

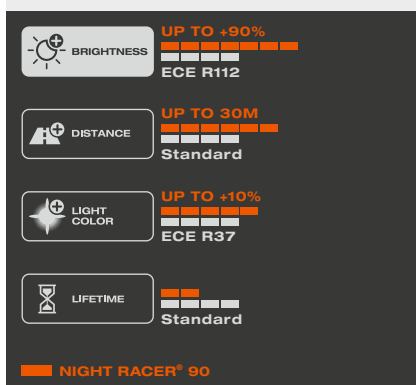

ECE/Range

HS1




>> Page 60

PERFORMANCE

NIGHT RACER® 50

**UP TO +50%
BRIGHTNESS¹⁾²⁾**

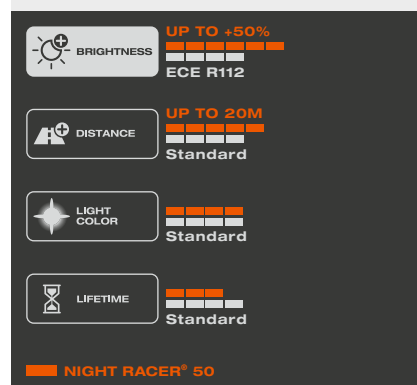

ECE/Range

H4, H7, H11, HS1

1) Compared to minimum ECE R112 requirements

2) The NIGHT RACER® 110/90/50 portfolio will be discontinued. For a wide range of motorcycle lighting possibilities, please see our product portfolio for use in cars and motorcycles.




>> Page 62

DESIGN

X-RACER®

XENON LOOK¹⁾

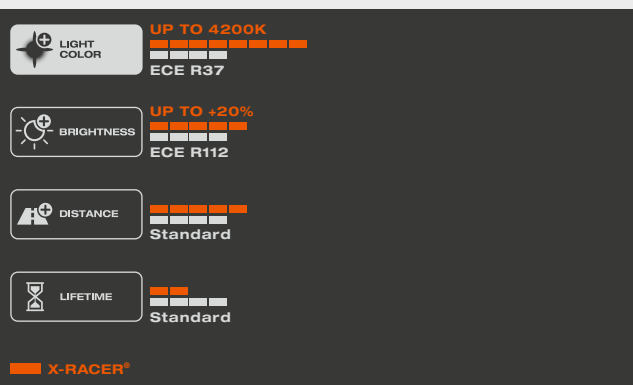

ECE/Range

H4, H7, H8, H11, HS1, S2




>> Page 62

ORIGINAL

ORIGINAL

ORIGINAL SPARE PART²⁾

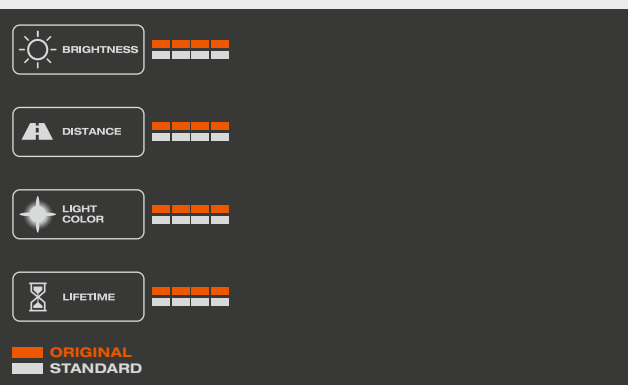

ECE/Range

H4, H7, S1, S2, R2, HS1

1) The X-RACER® portfolio will be discontinued. For a wide range of motorcycle lighting possibilities, please see our product portfolio for use in cars and motorcycles.

2) The ORIGINAL SPARE PART portfolio will be discontinued. For a wide range of motorcycle lighting possibilities, please see our product portfolio for use in cars and motorcycles.

Portfolio overview off-road




>> Page 65

PERFORMANCE

SUPER BRIGHT/
SUPER BRIGHT PREMIUM¹⁾

EXTRA POWER

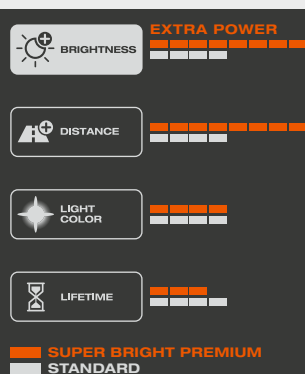

ECE/Range

P14.5s (H1), PK22s (H3), P43t (H4),
PX26d (H7), P20d (HB3), P22d (HB4)
PX14.5s, PKY22s, P45t (R2)




>> Page 66

DESIGN

XENARC® COOL BLUE® BOOST¹⁾

**XENON HYPER
BLUE**

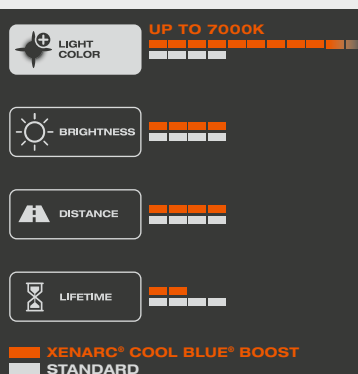

ECE/Range

PK32d-2 (D1S), P32d-2 (D2S),
PK32d-5 (D3S), P32d-5 (D4S)




>> Page 66

DESIGN

COOL BLUE® BOOST¹⁾

HYPER BLUE

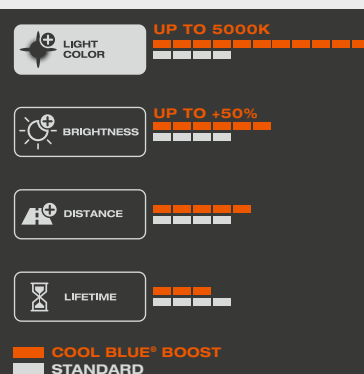

ECE/Range

P14.5s (H1), P43t (H4), PX26d (H7),
PGJ19-5 (H9), PGJ19-2 (H11), P20d
(HB3/HB3A), P22d (HB4/HB4A)

1) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.



LEDDriving® replacement lamps

OSRAM provides a wide range of LED replacement lamps for various applications. The LEDDriving® RETROFIT portfolio includes LED high and low beam lamps, fog lamps, signal as well as interior lamps with superior brightness and color temperatures of up to 6,000 K.



NIGHT BREAKER® LED

First OSRAM street legal H7-LED in low beam application in Germany only

NIGHT BREAKER® H7-LED will be the first LED retrofit for low beam that is approved in Germany. The plug-and-play solution offers drivers significant advantages: very high cool white color temperature of 6,000 Kelvin with up to 220 % more brightness compared to the minimum requirements of ECE R112, up to 5 times longer lifespan compared to halogen lamps and an additional 50 % less glare.

Features

- First street legal H7-LED in low beam application in Germany¹⁾
- Up to 220 % more brightness²⁾
- Up to 5 times more lifetime
- Premium quality developed and produced in certified OSRAM production plant in Italy
- Compact design, individual car testing approved by official inspection authorities

Benefits

- Better seen and be seen, for more safety on the road, especially at night
- Cool White LED-Upgrade with color temperature close to daylight for specific car models
- Environmentally friendly through longer durability and less garage shop visits and reduced energy³⁾
- Latest LED technology as solution for used cars with counterfeit protection thanks to OSRAM Trust program
- Easy installation with suitable accessories for installation and an affordable alternative compared to full LED systems

OSRAM LED H7 Street Legal product range



Product Reference		Product Number	V	W	K	COLOR			No.
64210DWNB	PX26d (H7)	4062172155045	12	19	6000	Cool White	2	4	3 ^{P.110}
64210DWNB-A01	PX26d (H7)	4062172185653	12	19	6000	Cool White	1	4x1	3 ^{P.110}
SMART CANBUS⁴⁾									
LEDSC01		4062172176439	12	12	-	-	2	4	-
LEDSC02		4062172176460	12	12	-	-	2	4	-
LEDSC03		4062172176491	12	12	-	-	2	4	-
ADAPTER									
64210DA01		4062172160384	12	-	-	-	2	20	-

1) Approved H7-LED low beam for Germany. Valid only for the vehicle models required in the ABG. §22a StVZO is paper printout as well as carrying a general type approval (ABG). Use only in right-hand traffic. Driving in left-hand traffic (e.g. England) requires upgrading to halogen lamps. | 2) Compared to minimum ECE R112. On top with 50 % less glare. | 3) Compared to halogen lamps | 4) LEDriving® SMART CANBUS (P.32) avoids error messages on the board computer when using LED lamps



OSRAM LEDDriving® HL

LED high and low beam in a new dimension

With a color temperature of 6,000 K and a very compact design, the OSRAM LEDDriving® HL retrofits provide an easy solution to upgrade car headlights with cool white LED light – providing a stylish look as well as superior brightness. The LED high and low beam lamps by OSRAM as replacement of conventional H1, H4, H7, HB4 and H11 lamps. With the latest LED technology and very compact design, these new lamps allow a high compatibility and an easy installation for an even wider range of car models. LEDDriving® HL lamps are 12 V and 24 V compatible. The pair of lamps comes with a 5-year OSRAM guarantee¹⁾ and with a long service life.



Features²⁾

- Cool White color temperature of 6,000 K
- Superior brightness
- Very compact LED replacement for conventional H1, H4, H7, HB4 and H11 high and low beam lamps
- Premium OSRAM quality made in Italy
- Long lifetime of up to 5,000 h
- Integrated electronics, no external driver

Benefits²⁾

- Better visibility thanks to daylight effect
- More light allows to see farther and therefore react sooner. Signs, obstacles and hazards can be recognized sooner
- Reduced glaring thanks to an optimized light distribution
- 5-year guarantee¹⁾
- More durability due to LED technology
- Simple plug & play installation and improved compatibility



Check the compatibility of your car!
www.osram.com/ledcheck



OSRAM LEDDriving® HL product range



P14.5s (H1)



P43t (H4)



PX26d (H7)



PX26d (H7)



PGJ19-2 (H11)



P22d (HB4)

Product Reference		Product Number	V	W	K	COLOR			No.
64150DWP-02HFB	P14.5s (H1)	4062172 168137	12	12	6000	Cool White	2	8	1 ^{P.110}
9726CW	P43t (H4)	4052899 605121	12/24	14	6000	Cool White	2	4	2 ^{P.110}
67210CW	PX26d (H7)	4052899 605084	12/24	14	6000	Cool White	2	4	4 ^{P.110}
64210DWP-02HFB	PX26d (H7)	4062172 176804	12/24	19	6000	Cool White	2	4	4 ^{P.110}
67211CW ³⁾	PGJ19-2 (H11)	4052899 605107	12/24	14	6000	Cool White	2	4	5 ^{P.110}
9736CW	P22d (HB4)	4052899 605145	12/24	14	6000	Cool White	2	4	6 ^{P.110}

Coming soon



Conventional lamp –
Halogen high beam

OSRAM LEDDriving® HL –
LED high beam



Conventional lamp –
Halogen low beam

OSRAM LEDDriving® HL –
LED low beam

1) Refer to www.osram.com/am-guarantee for precise conditions | 2) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country. | 3) LEDDriving® CANBUS CONTROL UNIT (P.32) avoids error messages on the board computer when using LED lamps within 50 W (LEDCBCTRL103) applications



OSRAM LEDriving® FL

LED fog lamps for maximum visibility

The latest generation of OSRAM LED fog lamps provides an even more convenient solution in order to replace and upgrade existing halogen fog lamps: With its ultra compact dimensions, the OSRAM LEDriving® FL provides optimized compatibility as well as easy plug & play installation. Upgrading with state-of-the-art LED technology and a color temperature of 6,000 K for a stylish cool white look as well as improved visibility. These LED products offer a perfect color match with xenon and LED headlights and are for conventional H8/H11/H16 or H10 fog lamps. A pair of new LEDriving® FL lamps, comes with a 3-year OSRAM guarantee¹⁾ as well as with a long service life by less energy consumption.

Features²⁾

- Cool White color temperature of 6,000 K
- Superior brightness
- Ultra compact LED replacement for conventional H8/H11/H16 and H10 fog lamps as socket solution
- Premium OSRAM quality

Benefits²⁾

- Better visibility in foggy situations with a perfect color match for xenon and LED headlights. Signs, obstacles and hazards can be recognized sooner.
- More light allows to see farther and therefore react sooner with reduced glaring thanks to an optimized light distribution
- Easy installation with optimized compatibility
- 3-year guarantee¹⁾



OSRAM LEDDriving® FL product range



PGJ19 (H8/H11/H16)



PY20d (H10)



PG20-7 (PSX24W)

Product Reference		Product Number	V	W	K	COLOR			No.
67219CW	PGJ19 (H8/H11/H16) ¹⁾	4052899 605046	12	9	6000	Cool White	2	4	8 ^{P.110}
9745CW	PY20d (H10)	4052899 605060	12	9	6000	Cool White	2	4	7 ^{P.110}
2604CW	PG20-7 (PSX24W)	4062172 058360	12	6.7	6000	Cool White	2	4	9 ^{P.110}


Conventional lamp –
Halogen fog light

OSRAM LEDDriving® FL –
LED fog light

1) Refer to www.osram.com/am-guarantee for precise conditions

2) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.

3) LEDDriving® CANBUS CONTROL UNIT (P.32) avoids error messages on the board computer when using LED lamps within 50 W (LEDCBCTRL103) applications



NEW OSRAM LEDriving® SL

Wide range of interior and exterior signal lamps

The new OSRAM LEDriving® SL portfolio combines premium quality of the latest LED technology for a competitive price. In addition, OSRAM LED replacement lamps offer a modern and intense LED light of up to 6000 Kelvin color temperature. These LED signal lamps replace conventional lamps as easy plug-and-play solution for various vehicle applications. In comparison to standard lamps, LED retrofit lamps have a quicker light up. Meaning faster signals provide more reaction time for drivers behind you. On top OSRAM offers a 4 year guarantee¹⁾ for these LEDriving® SL lamps.

Features of LEDriving® SL ²⁾³⁾

- High color temperatures of up to 6,000 K
- High brightness
- Replaces conventional signal lamps for interior and exterior application
- OSRAM quality
- Long lifetime of up to 2,500 h with low energy consumption

Benefits of LEDriving® SL ²⁾³⁾

- Multiple light colors for a variety of customization options
- Non-selective illumination thanks to homogeneous light distribution
- Simple installation
- 4-year guarantee¹⁾
- Durable and energy-efficient



OSRAM LEDriving® SL¹⁾ product range



Product Reference		Product Number	V	W	$\frac{l}{[mm]}$	K	λ [nm]	COLOR			No.
828DWP	PG18.5d-1 (P13W)	4062172 150279	12	1.6	48.3	6000	-	Cool White	1	10	13 ^{P.110}
5201DWP	PG20-1 (PS19W)	4062172 150293	12	1.6	42.5	6000	-	Cool White	1	10	14 ^{P.110}
2825DWP-02B	W2.1x9.5d (W5W)	4052899 620810	12	0.8	25.0	6000	617-621	Cool White	2	20	19 ^{P.110}
2825DRP-02B	W2.1x9.5d (W5W)	4062172 150316	12	0.6	25.0	-	617-621	Red	2	10	19 ^{P.110}
2827DYP-02B	W2.1x9.5d (W5W/WY5W)	4062172 150330	12	0.5	25.0	-	592	Amber	2	10	19 ^{P.110}
921DWP-02B	W2.1x9.5d (W16W)	4062172 150804	12	2.1	35.9	6000	-	Cool White	2	10	20 ^{P.110}
921DRP-02B	W2.1x9.5d (W16W)	4062172 160155	12	1.4	35.9	-	617-621	Red	2	10	20 ^{P.110}
6438DWP-01B	SV8.5-8 (C5W)	4062172 150637	12	1.0	31.0	6000	-	Cool White	1	5	10 ^{P.110}
6418DWP-01B	SV8.5-8 (C5W)	4062172 150651	12	0.6	36.0	6000	-	Cool White	1	5	9 ^{P.110}
6413DWP-01B	SV8.5-8 (C5W)	4062172 150675	12	0.6	41.0	6000	-	Cool White	1	5	10 ^{P.110}
7506DWP-02B	BA15s (P21W)	4062172 152181	12	1.9	42.6	6000	-	Cool White	2	10	19 ^{P.110}
7506DRP-02B	BA15s (P21W)	4062172 152204	12	1.3	42.6	-	617-621	Red	2	10	13 ^{P.110}
7506DYP-02B	BA15s (P21W)	4062172 152228	12	1.3	42.6	-	592	Amber	2	10	13 ^{P.110}
7507DYP-02B	BAU15s (PY21W)	4062172 152242	12	1.3	42.6	-	592	Amber	2	10	13 ^{P.110}
7515DWP-02B	W3x16q (W21/5W)	4062172 152266	12	1.9	36.3	6000	-	Cool White	2	10	22 ^{P.110}
7515DRP-02B	W3x16d (W21/5W)	4062172 152280	12	1.7	36.3	-	617-621	Red	2	10	22 ^{P.110}
7515DYP-02B	W3x16q (W21/5W)	4062172 152303	12	1.3	36.3	-	592	Amber	2	10	22 ^{P.110}
7505DWP-02B	W3x16d (W21W)	4062172 149235	12	2.0	36.3	6000	-	Cool White	2	10	21 ^{P.110}
7505DRP-02B	W3x16d (W21W)	4062172 149259	12	1.4	36.3	-	617-621	Red	2	10	21 ^{P.110}
7505DYP-02B	W3x16d (W21W)	4062172 149273	12	1.3	36.3	-	592	Amber	2	10	21 ^{P.110}
7504DYP-02B	WX3x16d (WY21W)	4062172 156004	12	1.3	36.3	-	592	Amber	2	10	23 ^{P.110}
7528DWP-02B	BAY15d (P21/5W)	4062172 151726	12	2.0	42.6	6000	-	Cool White	2	10	16 ^{P.110}
7528DRP-02B	BAY15d (P21/5W)	4062172 151740	12	1.4	42.6	-	617-621	Red	2	10	16 ^{P.110}
7528DYP-02B	BAY15d (P21/5W)	4062172 151702	12	1.3	42.6	-	592	Amber	2	10	16 ^{P.110}
3157DWP-02B	W3x16q (P27/7W)	4062172 151641	12	2.0	42.6	6000	-	Cool White	2	10	18 ^{P.110}
3157DRP-02B	W3x16q (P27/7W)	4062172 151689	12	1.4	42.6	-	617-621	Red	2	10	18 ^{P.110}
3157DYP-02B	W3x16q (P27/7W)	4062172 151665	12	1.3	42.6	-	592	Amber	2	10	18 ^{P.110}
3893DWP-02B	BA9s (T4W)	4062172 150354	12	0.8	27.8	6000	-	Cool White	2	10	24 ^{P.110}



Replace your conventional lamps with LED retrofit lamps.
Visit www.osram.com/retrofit-exchange

- 1) Refer to www.osram.com/am-guarantee for precise conditions
- 2) These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.
- 3) LEDriving® CANBUS CONTROL UNIT (P.32) avoid error messages on the board computer when using LED retrofits within 5W, 21W and 50 W applications.



OSRAM LEDriving® HL

Bright light for trucks (24V)

Simply replace old truck lamps with OSRAM's LED replacement lamps for forward and interior lighting to benefit from highly energy-efficient bright LED light. LEDriving® HL for high and low beam applications are 12 V and 24 V compatible and stand out with very compact design, high compatibility and easy installation. LEDriving® SL, LED signal lamps, are available in cool and warm white light for ambient lighting.

Features¹⁾ of LEDriving® HL

- Cool White color temperature of 6,000 K
- Superior brightness
- Very compact LED replacement for conventional H4, H7, HB4 and H11 high and low beam lamps
- Premium OSRAM quality made in Italy
- Long lifetime of up to 5,000 h
- Integrated electronics, no external driver

Benefits¹⁾ of LEDriving® HL

- Better visibility thanks to daylight effect
- More light allows to see farther and therefore react sooner. Signs, obstacles and hazards can be recognized sooner
- Reduced glaring thanks to an optimized light distribution
- 5-year guarantee²⁾
- More durability due to LED technology
- Simple plug & play installation and improved compatibility



OSRAM LEDDriving® HL (24V) Truck product range



Product Reference		Product Number	V	W	K	COLOR				No.
9726CW	P43t (H4)	4052899 605121	12/24	14	6000	Cool White	2	4		2 ^{P.110}
67210CW	PX26d (H7)	4052899 605084	12/24	14	6000	Cool White	2	4		4 ^{P.110}
67211CW ³⁾	PGJ19-2 (H11)	4052899 605107	12/24	14	6000	Cool White	2	4		8 ^{P.110}
9736CW	P22d (HB4)	4052899 605145	12/24	14	6000	Cool White	2	4		5 ^{P.110}



Replace your conventional lamps with LED retrofit lamps.
Visit www.osram.com/retrofit-exchange

1) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.

2) Refer to www.osram.com/am-guarantee for precise conditions

3) LEDDriving® CANBUS CONTROL UNIT (P.32) avoids error messages on the board computer when using LED lamps within 5 W (LEDCBCTRL101), 21 W (LEDCBCTRL102) or 50 W (LEDCBCTRL103) applications

4) Compared with conventional lamps



OSRAM LEDriving® ACCESSORIES

Making LED upgrades fit right in

LED lamps are highly energy-efficient. But their lower wattages prompt board computer warnings. The OSRAM solution: the Canbus Control Unit. It prevents warnings and allows the lightsource to run cool and retain their brightness. Simply clip the warning canceller between lamp and socket, and enjoy the full benefits of your OSRAM LED retrofits and fog lights.

Features


- Bypasses the vehicle's outage detection system to prevent error messages in board computers prompted by LED lamps with lower wattages
- Available for 4-5 W, 21 or 50 W
- Robust component

Benefits

- Easily clips onto wires
- Enjoy full benefits of your OSRAM LED retrofits and fog lights
- Original OSRAM accessory
- 3-year guarantee¹⁾



OSRAM LEDriving® CANBUS CONTROL UNIT product range

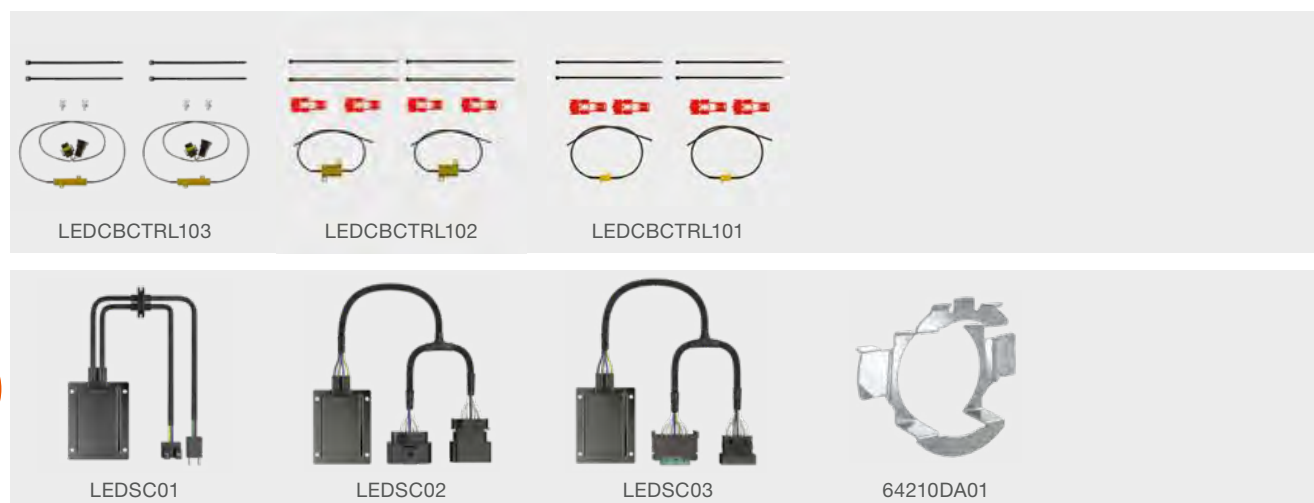

Product Reference	Product Number	V	W			 No.
LEDCBCTRL103	4052899327375	12	50	2	10	-
LEDCBCTRL102	4052899301993	12	21	2	10	-
LEDCBCTRL101	4052899090873	12	5	2	10	-
SMART CANBUS¹⁾						
LEDSC01	4062172176439	12	12	2	4	-
LEDSC02	4062172176460	12	12	2	4	-
LEDSC03	4062172176491	12	12	2	4	-
ADAPTER						
64210DA01	4062172160384	12	-	2	20	-

1) LEDriving® SMART CANBUS avoids error messages on the board computer when using LED lamps



Xenon headlight lamps – fascinatingly bright

OSRAM xenon lamps generate up to 200% more brightness compared to the minimum legal standard – at impressive color temperatures, as well as significantly lower energy consumption and longer life than halogen lamps. OSRAM cutting-edge xenon lighting concepts, however, allow far more than just driving comfort, underlining personal style and demonstrating individual environmental awareness. They are suitable for cars, trucks, buses and commercial vehicles.



OSRAM XENARC® NIGHT BREAKER® LASER

Brightest OSRAM xenon light

With up to 200% more brightness on the road compared to the minimum legal standard, these exceptionally bright headlight lamps offer up to 20% whiter xenon light¹⁾ and a beam length of up to 250 m.



Features

- Up to 200% more brightness¹⁾
- Up to 250 m long beam
- Up to 20% whiter light¹⁾
- Optimized light distribution for higher performance

Benefits

- More light allows to see farther and therefore react sooner
- Better visibility
- Close to laser look



OSRAM XENARC® NIGHT BREAKER® LASER product range

Product Reference	ECE	Product Number	V	W		lm	K			No.
66140XNL ²⁾³⁾	D1S ⁴⁾	4052899992870	85	35	PK32d-2	3200 ⁵⁾	4500	1	4	1 ^{P.116}
66140XNL-HCB ²⁾³⁾	D1S ⁴⁾	Page 132	85	35	PK32d-2	3200 ⁵⁾	4500	2	4	1 ^{P.116}
66240XNL ²⁾³⁾	D2S ⁴⁾	4052899993259	85	35	P32d-2	3200 ⁵⁾	4500	1	4	3 ^{P.116}
66240XNL-HCB ²⁾³⁾	D2S ⁴⁾	Page 132	85	35	P32d-2	3200 ⁵⁾	4500	2	4	3 ^{P.116}
66340XNL ²⁾³⁾	D3S ⁴⁾	4052899992979	42	35	PK32d-5	3200 ⁵⁾	4400	1	4	1 ^{P.116}
66340XNL-HCB ²⁾³⁾	D3S ⁴⁾	Page 132	42	35	PK32d-5	3200 ⁵⁾	4400	2	4	1 ^{P.116}
66440XNL ²⁾³⁾	D4S ⁴⁾	4052899992993	42	35	P32d-5	3200 ⁵⁾	4400	1	4	3 ^{P.116}
66440XNL-HCB ²⁾³⁾	D4S ⁴⁾	Page 132	42	35	P32d-5	3200 ⁵⁾	4400	2	4	3 ^{P.116}

1) Compared to minimum ECE R98/R99 requirements | 2) To be operated only with approved electronic control gear | 3) XENARC® lamps should be replaced by a qualified mechanic | 4) Reduced UV emission | For projection headlights | ECE approval and DOT label | 5) ± 450 lm



OSRAM XENARC® COOL BLUE® INTENSE

Extra-blue xenon light

Exceptionally bright, high contrast and brilliantly blue with up to 6,000 K:
The high-tech xenon light comes with a highly efficient technology, brilliant effect and no-compromise design.



Features

- Extra blue light¹⁾
- Color temperatures of up to 6,000 K
- Up to 20% more brightness²⁾

Benefits

- Modern look on the road
- High contrast
- More light allows to see farther and therefore react sooner



OSRAM XENARC® COOL BLUE® INTENSE product range

Product Reference	ECE	Product Number	V	W		lm	K			No.
66140CBI ⁽³⁾⁴⁾	D1S ⁽⁵⁾	4052899 220720	85	35	PK32d-2	3200 ⁽⁷⁾	6000 ⁽⁸⁾	1	4	1 ^{P.116}
66140CBI-HCB ⁽³⁾⁴⁾	D1S ⁽⁵⁾	Page 132	85	35	PK32d-2	3200 ⁽⁷⁾	6000 ⁽⁸⁾	2	4	1 ^{P.116}
66150CBI ⁽³⁾⁴⁾	D1R ⁽⁶⁾	4052899 339903	85	35	PK32d-3	2800 ⁽⁷⁾	6000 ⁽⁸⁾	1	4	2 ^{P.116}
66240CBI ⁽³⁾⁴⁾	D2S ⁽⁵⁾	4008321 401359	85	35	P32d-2	3200 ⁽⁷⁾	6000 ⁽⁸⁾	1	4	3 ^{P.116}
66240CBI-HCB ⁽³⁾⁴⁾	D2S ⁽⁵⁾	Page 132	85	35	P32d-2	3200 ⁽⁷⁾	6000 ⁽⁸⁾	2	4	3 ^{P.116}
66250CBI ⁽³⁾⁴⁾	D2R ⁽⁶⁾	4008321 401533	85	35	P32d-3	2800 ⁽⁷⁾	6000 ⁽⁸⁾	1	4	4 ^{P.116}
66340CBI ⁽³⁾⁴⁾	D3S ⁽⁵⁾	4052899 148710	42	35	PK32d-5	3200 ⁽⁷⁾	6000 ⁽⁸⁾	1	4	1 ^{P.116}
66340CBI-HCB ⁽³⁾⁴⁾	D3S ⁽⁵⁾	Page 132	42	35	PK32d-5	3200 ⁽⁷⁾	6000 ⁽⁸⁾	2	4	1 ^{P.116}
66440CBI ⁽³⁾⁴⁾	D4S ⁽⁵⁾	4052899 125582	42	35	P32d-5	3200 ⁽⁷⁾	6000 ⁽⁸⁾	1	4	3 ^{P.116}
66440CBI-HCB ⁽³⁾⁴⁾	D4S ⁽⁵⁾	Page 132	42	35	P32d-5	3200 ⁽⁷⁾	6000 ⁽⁸⁾	2	4	3 ^{P.116}

1) From a special filling system instead of conventional coating | 2) Compared to minimum ECE R98 requirements | 3) To be operated only with approved electronic control gear | 4) XENARC® lamps should be replaced by a qualified mechanic | 5) Reduced UV emission / For projection headlights / ECE approval and DOT label | 6) Reduced UV emission | With anti-glare strip for reflection headlights | ECE approval and DOT label | 7) ± 450 lm | 8) Up to



OSRAM XENARC® ULTRA LIFE

Superior life and 10-year guarantee

For additional reliability: With up to four times the lifespan of a standard lamp, XENARC® ULTRA LIFE headlight lamps come with a 10-year guarantee¹⁾.



Features

- 10-year guarantee¹⁾
- Up to 4 times longer lifetime²⁾
- Up to 300,000 km service life³⁾
- More durability

Benefits

- Additional comfort due to reliable quality
- Saves time due to fewer workshop visits
- Additional reliability
- Longer replacement cycles



OSRAM XENARC® ULTRA LIFE product range

Product Reference	ECE	Product Number	V	W		lm	K			No.
66140ULT ⁴⁾⁵⁾	D1S ⁶⁾	4052899 425514	85	35	PK32d-2	3200 ⁷⁾	4300	1	4	1 ^{P.116}
66140ULT-HCB ⁴⁾⁵⁾	D1S ⁶⁾	Page 132	85	35	PK32d-2	3200 ⁷⁾	4300	2	4	1 ^{P.116}
66240ULT ⁴⁾⁵⁾	D2S ⁶⁾	4052899 425576	85	35	P32d-2	3200 ⁷⁾	4300	1	4	3 ^{P.116}
66240ULT-HCB ⁴⁾⁵⁾	D2S ⁶⁾	Page 133	85	35	P32d-2	3200 ⁷⁾	4300	2	4	3 ^{P.116}
66340ULT ⁴⁾⁵⁾	D3S ⁶⁾	4052899 425606	42	35	PK32d-5	3200 ⁷⁾	4300	1	4	1 ^{P.116}
66340ULT-HCB ⁴⁾⁵⁾	D3S ⁶⁾	Page 133	42	35	PK32d-5	3200 ⁷⁾	4300	2	4	1 ^{P.116}
66440ULT ⁴⁾⁵⁾	D4S ⁶⁾	4052899 425637	42	35	P32d-5	3200 ⁷⁾	4300	1	4	3 ^{P.116}
66440ULT-HCB ⁴⁾⁵⁾	D4S ⁶⁾	Page 133	42	35	P32d-5	3200 ⁷⁾	4300	2	4	3 ^{P.116}

1) With online product registration. Refer to www.osram.com/am-guarantee for precise conditions and registration | 2) Compared to standard xenon lamps | 3) With an average annual mileage of 14,259 km and 60% light on | 4) To be operated only with approved electronic control gear | 5) XENARC® lamps should be replaced by a qualified mechanic | 6) Reduced UV emission | For projection headlights | ECE approval and DOT label | 7) ± 450 lm



OSRAM XENARC® ORIGINAL

4-year guarantee

XENARC® ORIGINAL lamps impress with a wide product range and the reliable OEM quality. Successfully used in millions of new automobiles from renowned manufacturers, whether as standard initial equipment or original spare parts.



Features

- 4-year guarantee¹⁾
- OEM Quality
- Original spare parts that exceed all ECE minimum standards
- Wide product range

Benefits

- Additional comfort due to reliable quality
- Tried and trusted in millions of vehicles of well-known manufacturers
- Premium quality made in Germany
- Suitable for many xenon headlights



OSRAM XENARC® ORIGINAL product range

Product Reference	ECE	Product Number	V	W		lm	K			No.
66140 ²⁾³⁾	D1S ⁴⁾	4008321 184276	85	35	PK32d-2	3200 ⁶⁾	4300	1	4	1 ^{P.116}
66140-1SCB ²⁾³⁾	D1S ⁴⁾	4052899 600423	85	35	PK32d-2	3200 ⁶⁾	4300	1	4	1 ^{P.116}
66150 ²⁾³⁾	D1R ⁵⁾	4052899 339828	85	35	PK32d-3	2800 ⁶⁾	4300	1	4	2 ^{P.116}
66240 ²⁾³⁾	D2S ⁴⁾	4008321 184573	85	35	P32d-2	3200 ⁶⁾	4300	1	4	3 ^{P.116}
66240-1SCB ²⁾³⁾	D2S ⁴⁾	4052899 600447	85	35	P32d-2	3200 ⁶⁾	4300	1	4	3 ^{P.116}
66250 ²⁾³⁾	D2R ⁵⁾	4008321 184634	85	35	P32d-3	2800 ⁶⁾	4300	1	4	4 ^{P.116}
66340 ²⁾³⁾	D3S ⁴⁾	4052899 199569	42	35	PK32d-5	3200 ⁶⁾	4300	1	4	1 ^{P.116}
66340-1SCB ²⁾³⁾	D3S ⁴⁾	4052899 600485	42	35	PK32d-5	3200 ⁶⁾	4300	1	4	1 ^{P.116}
66350 ²⁾³⁾	D3R ⁵⁾	4008321 129857	42	35	PK32d-6	2800 ⁶⁾	4300	1	4	2 ^{P.116}
66440 ²⁾³⁾	D4S ⁴⁾	4008321 349392	42	35	P32d-5	3200 ⁶⁾	4300	1	4	3 ^{P.116}
66440-1SCB ²⁾³⁾	D4S ⁴⁾	4052899 600508	42	35	P32d-5	3200 ⁶⁾	4300	1	4	3 ^{P.116}
66450 ²⁾³⁾	D4R ⁵⁾	4008321 349576	42	35	P32d-6	2800 ⁶⁾	4300	1	4	4 ^{P.116}
66540 ³⁾	D5S ⁴⁾	4052899 600522	12	25	PK32d-7	2000 ⁷⁾	4800	1	4	-
66548 ²⁾³⁾	D8S ⁴⁾	4008321 787019	42	25	PK32d-1	2000 ⁸⁾	4500	1	4	2 ^{P.116}

A perfectly matched OSRAM system solution with ballast, terminal and connecting cables is available for all XENARC® D1S/R, D3S/R and D8S lamps. Please consult your OSRAM contact if required.

1) Refer to www.osram.com/am-guarantee for precise conditions

2) To be operated only with approved electronic control gear

3) XENARC® lamps should be replaced by a qualified mechanic

4) Reduced UV emission | For projection headlights | ECE approval and DOT label

5) Reduced UV emission | With anti-glare strip for projection headlights | ECE approval and DOT label

6) ± 450 lm

7) + 300 lm/-200 lm

8) ± 300 lm



Halogen lamps for cars – the most popular classic light, for good reason

Long life or high performance, optimized illumination, best quality, convincing price-performance ratio – for these excellent reasons, OSRAM halogen solutions are the best-selling classics among headlight lamps. From original, performance, design, and comfort products, each customer can choose the exact lamp which best fits their personal needs – whether it is an original spare part or a value-added product.



OSRAM NIGHT BREAKER® LASER

Brightest OSRAM halogen light

Outshining all other OSRAM halogen lamps: Innovative laser ablation technology makes the NIGHT BREAKER® LASER up to 150% brighter than the minimum legal standard.



Features

- Up to 150% more brightness¹⁾
- Up to 150 m long beam
- Up to 20% whiter light¹⁾
- More light performance due to innovative laser ablation technology²⁾
- Unique design with laser-etched product name²⁾

Benefits

- More light allows to see farther and therefore react sooner
- Better visibility
- Modern look
- Signs, obstacles and hazards can be recognized sooner



OSRAM NIGHT BREAKER® LASER product range

Product Reference	ECE	Product Number	V	W				No.
64150NL	H1	4052899991309	12	55	P14.5s	1	100	5 ^{P.116}
64150NL-01B	H1	4062172114936	12	55	P14.5s	1	10	5 ^{P.116}
64150NL-HCB	H1	4062172114899	12	55	P14.5s	2	20	5 ^{P.116}
64151NL	H3	4052899991330	12	55	PK22s	1	100	7 ^{P.116}
64151NL-HCB	H3	4062172114912	12	55	PK22s	1	10	7 ^{P.116}
64193NL	H4	4052899991361	12	60/55	P43t	1	100	8 ^{P.116}
64193NL-01B	H4	4062172114431	12	60/55	P43t	1	10	8 ^{P.116}
64193NL-HCB	H4	4062172114318	12	60/55	P43t	2	20	8 ^{P.116}
64210NL	H7	4052899991392	12	55	PX26d	1	100	9 ^{P.116}
64210NL-01B	H7	4062172114455	12	55	PX26d	1	10	9 ^{P.116}
64210NL-HCB	H7	4062172114332	12	55	PX26d	2	20	9 ^{P.116}
64212NL	H8	4052899998827	12	35	PGJ19-1	1	100	10 ^{P.116}
64212NL-HCB	H8	4062172114370	12	35	PGJ19-1	2	20	10 ^{P.116}
64211NL	H11	4052899991422	12	55	PGJ19-2	1	100	15 ^{P.116}
64211NL-01B	H11	4062172114479	12	55	PGJ19-2	1	10	15 ^{P.116}
64211NL-HCB	H11	4062172114356	12	55	PGJ19-2	2	20	15 ^{P.116}
9005NL	HB3	4052899998858	12	60	P20d	1	100	23 ^{P.116}
9005NL-HCB	HB3	4062172114394	12	60	P20d	2	20	23 ^{P.116}
9006NL	HB4	4052899998889	12	51	P22d	1	100	25 ^{P.116}
9006NL-HCB	HB4	4062172114417	12	51	P22d	2	20	25 ^{P.116}

1) Compared to minimum ECE R112/R37 requirements | 2) H4/H7/H8/H11/HB3/HB4



OSRAM NIGHT BREAKER® SILVER

Excellent performance-lifetime ratio

With up to 100% more brightness compared to the minimum legal standard, an excellent choice for motorists with high demands for performance and lifetime.



Features

- Up to 100% more brightness¹⁾
- Up to 130 m long beam
- Excellent performance-lifetime ratio

Benefits

- More light allows to see farther and therefore react sooner
- Better visibility
- More light at a reasonable lifetime



OSRAM NIGHT BREAKER® SILVER product range

Product Reference	ECE	Product Number	V	W				
64150NBS	H1	4052899 992573	12	55	P14.5s	1	100	5 ^{P.116}
64150NBS-01B	H1	Page 133	12	55	P14.5s	1	10	5 ^{P.116}
64150NBS-HCB	H1	Page 133	12	55	P14.5s	2	20	5 ^{P.116}
64193NBS	H4	4052899 992603	12	60/55	P43t	1	100	8 ^{P.116}
64193NBS-01B	H4	Page 133	12	60/55	P43t	1	10	8 ^{P.116}
64193NBS-HCB	H4	Page 133	12	60/55	P43t	2	20	8 ^{P.116}
64210NBS	H7	4052899 992634	12	55	PX26d	1	100	9 ^{P.116}
64210NBS-01B	H7	Page 133	12	55	PX26d	1	10	9 ^{P.116}
64210NBS-HCB	H7	Page 133	12	55	PX26d	2	20	9 ^{P.116}
64211NBS	H11	4052899 992665	12	55	PGJ19-2	1	100	15 ^{P.116}
64211NBS-HCB	H11	Page 133	12	55	PGJ19-2	2	20	15 ^{P.116}

¹⁾ Compared to minimum ECE R112 requirements



OSRAM COOL BLUE® INTENSE

Bluish-white light for xenon look

Stylish xenon look for your drive: High-tech halogen lamp, almost in the league of xenon lamps with their powerful bluish-white light.



Features

- Bluish-white light for xenon look
- Color temperatures of up to 4,200 K
- Up to 20% more brightness¹⁾
- Modern design with silver cap²⁾

Benefits

- Modern and stylish look
- High contrast
- More light allows to see farther and therefore react sooner
- Ideal for use in clear-glass headlights



OSRAM COOL BLUE® INTENSE product range

Product Reference	ECE	Product Number	V	W				No.
64150CBI	H1	4008321655325	12	55	P14.5s	1	100	5 ^{P.116}
64150CBI-01B	H1	Page 133	12	55	P14.5s	1	10	5 ^{P.116}
64150CBI-HCB	H1	Page 133	12	55	P14.5s	2	10	5 ^{P.116}
64151CBI	H3	4008321655462	12	55	PK22s	1	100	7 ^{P.116}
64193CBI	H4	4008321650894	12	60/55	P43t	1	100	8 ^{P.116}
64193CBI-01B	H4	Page 133	12	60/55	P43t	1	10	8 ^{P.116}
64193CBI-HCB	H4	Page 133	12	60/55	P43t	2	10	8 ^{P.116}
64210CBI	H7	4008321651341	12	55	PX26d	1	100	9 ^{P.116}
64210CBI-01B	H7	Page 133	12	55	PX26d	1	10	9 ^{P.116}
64210CBI-HCB	H7	Page 133	12	55	PX26d	2	10	9 ^{P.116}
64212CBI-HCB	H8	Page 133	12	35	PGJ19-1	2	10	10 ^{P.116}
64211CBI	H11	4052899433175	12	55	PGJ19-2	1	100	15 ^{P.116}
64211CBI-HCB	H11	Page 133	12	55	PGJ19-2	2	10	15 ^{P.116}
64176CBI	H15	4052899932708	12	55/15	PGJ23t-1	1	100	18 ^{P.116}
64176CBI-HCB	H15	Page 133	12	55/15	PGJ23t-1	2	10	18 ^{P.116}
64219CBI	H16	4052899268326	12	19	PGJ19-3	1	100	19 ^{P.116}
64219CBI-HCB	H16	Page 133	12	19	PGJ19-3	2	10	19 ^{P.116}
880CBI	H27W/1	4052899479999	12	27	PG13	1	100	32 ^{P.116}
881CBI	H27W/2	4052899480025	12	27	PGJ13	1	100	32 ^{P.116}
9005CBI-HCB	HB3	Page 133	12	60	P20d	2	10	23 ^{P.116}
9006CBI-HCB	HB4	Page 133	12	51	P22d	2	10	25 ^{P.116}
9012CBI	HIR2	4052899455405	12	55	PX22d	1	100	29 ^{P.116}
2825HCBI	W5W	4008321650849	12	5	W2.1x9.5d	10	50	52 ^{P.117}
2825HCBI-02B	W5W	Page 133	12	5	W2.1x9.5d	2	20	52 ^{P.117}

1) Compared to minimum ECE R112 requirements | 2) H4, H7, H11, H27W/1, H27W/2, HB4



OSRAM DIADEM® CHROME and DIADEM®

Only amber or red during operation

Visual tuning for indicator and tail lamps: The signal lights only emit amber or red light during operation – making them the perfect, attractive light supplement for halogen and xenon headlamps.

Features of DIADEM® CHROME

- Chrome design
- Only amber when ON
- No irritating color effects
- Cutting edge interference and absorber coating

Benefits of DIADEM® CHROME

- Attractive light supplement for halogen and xenon headlamps
- Almost invisible when not operating
- Ideal for all indicator lights with clear covers
- Exclusive chrome look

Features of DIADEM®

- Opal design
- Red or amber when ON
- Up to double the service life¹⁾
- State-of-the-art interference coating

Benefits of DIADEM®

- Attractive light supplement for halogen and xenon headlamps
- Almost invisible when not operating
- Additional reliability
- Opal look



OSRAM DIADEM® CHROME product range

Product Reference	ECE	Product Number	V	W				
2827DC-02B ²⁾	WY5W	Page 133	12	5	W2.1x9.5d	2	20	52 ^{P.117}
7507DC-02B ²⁾	PY21W	Page 133	12	21	BAU15s	2	20	38 ^{P.116}

OSRAM DIADEM® product range

Product Reference	ECE	Product Number	V	W				
7507LDA-02B ²⁾	PY21W	Page 133	12	21	BAU15s	2	20	38 ^{P.116}
7508LDR-01B ³⁾	PR21W	Page 133	12	21	BAW15s	1	10	43 ^{P.116}
7538LDR-01B ³⁾	PR21/5W	Page 133	12	21/5	BAW15d	1	10	44 ^{P.116}

1) Compared with standard lamps

2) Amber lamps for clear indicator lights

3) Red light for clear tail/brake lights



OSRAM ULTRA LIFE

Longer life and 4-year guarantee

The ULTRA LIFE product family provides more reliability and durability. The lamps last up to four times longer compared with standard lamps and have a rock-solid guarantee of four years with online registration.



Features

- 4-year guarantee¹⁾
- Up to 4 times longer lifetime²⁾
- Up to 100,000 km service life³⁾
- More durability
- Modern design with silver cap (H4/H7/H11)

Benefits

- Additional comfort due to reliable quality
- Saves time due to fewer workshop visits
- Additional reliability
- Longer replacement cycles
- Ideal for use in clear-glass headlights



OSRAM ULTRA LIFE product range

Product Reference	ECE	Product Number	V	W				
64150ULT	H1	4008321 416209	12	55	P14.5s	1	100	5 ^{P.116}
64150ULT-01B	H1	Page 133	12	55	P14.5s	1	10	5 ^{P.116}
64150ULT-HCB	H1	Page 133	12	55	P14.5s	2	10	5 ^{P.116}
64193ULT	H4	4008321 416230	12	60/55	P43t	1	100	8 ^{P.116}
64193ULT-01B	H4	Page 133	12	60/55	P43t	1	10	8 ^{P.116}
64193ULT-HCB	H4	Page 133	12	60/55	P43t	2	10	8 ^{P.116}
64210ULT	H7	4008321 416261	12	55	PX26d	1	100	9 ^{P.116}
64210ULT-01B	H7	Page 133	12	55	PX26d	1	10	9 ^{P.116}
64210ULT-HCB	H7	Page 133	12	55	PX26d	2	10	9 ^{P.116}
64211ULT	H11	4052899 431164	12	55	PGJ19-2	1	100	15 ^{P.116}
64211ULT-01B	H11	Page 133	12	55	PGJ19-2	1	10	15 ^{P.116}
64211ULT-HCB	H11	Page 133	12	55	PGJ19-2	2	10	15 ^{P.116}
7506ULT	P21W	4008321 415349	12	21	BA15s	10	50	38 ^{P.116}
7506ULT-02B	P21W	Page 133	12	21	BA15s	2	20	38 ^{P.116}
7507ULT ⁴⁾	PY21W	4008321 413147	12	21	BAU15s	10	50	38 ^{P.116}
7507ULT-02B ⁴⁾	PY21W	Page 133	12	21	BAU15s	2	20	38 ^{P.116}
7528ULT	P21/5W	4008321 413116	12	21/5	BAY15d	10	50	39 ^{P.116}
7528ULT-02B	P21/5W	Page 133	12	21/5	BAY15d	2	20	39 ^{P.116}
2825ULT	W5W	4008321 413024	12	5	W2.1x9.5d	10	50	52 ^{P.117}
2825ULT-02B	W5W	Page 133	12	5	W2.1x9.5d	2	20	52 ^{P.117}
5007ULT	R5W	4008321 415370	12	5	BA15s	10	50	48 ^{P.117}
5007ULT-02B	R5W	Page 133	12	5	BA15s	2	20	48 ^{P.117}
5008ULT	R10W	4008321 415400	12	10	BA15s	10	50	48 ^{P.117}
5008ULT-02B	R10W	Page 133	12	10	BA15s	2	20	48 ^{P.117}
6418ULT	C5W	4008321 413086	12	5	SV8.5-8	10	50	36 ^{P.116}
6418ULT-02B	C5W	Page 133	12	5	SV8.5-8	2	20	36 ^{P.116}
64132ULT	H6W	4008321 413178	12	6	BAX9s	10	50	37 ^{P.116}
64132ULT-02B	H6W	Page 133	12	6	BAX9s	2	20	37 ^{P.116}
64137ULT ⁴⁾	HY21W	4052899 910256	12	21	BAW9s	10	50	35 ^{P.116}

1) 4th year with online product registration. Refer to www.osram.com/am-guarantee for precise conditions and registration

2) Compared with standard lamps

3) With an average annual mileage of 14,259 km and 60% light on

4) Amber lamps for clear indicator lights

OSRAM ORIGINAL LINE 12 V

Original spare part

Convincing performance for standard requirements, robust and cost-effective:
Successfully used in millions of new cars from renowned manufacturers, whether as standard initial equipment or original spare parts.



Features

- OEM Quality
- Original spare parts that exceed all ECE minimum standards
- Wide product range

Benefits

- Tried and trusted in millions of vehicles of well-known manufacturers
- Premium quality made in Germany
- Suitable for the most common applications

OSRAM history

In 1925, OSRAM showcased the world a simple, yet ingenious solution – a lamp with two filaments, one for dipped beam and one for high beam. The BILUX® lamp was born and specifically registered to OSRAM. This enabled all the functions, which previously took up a lot of space and required complex mechanical designs, to be combined in one single light source. The lamp produced two beams with different strengths and angles in one single reflector.

Headlight manufacturers reacted quickly, and this technology became the typical light in all conventional vehicles in the 60s and even the 70s. It's still available today in its original form. The first generation of the OSRAM BILUX® lamps generally had a **P45t base** and an electrical output of **40/45 watts**.



OSRAM ORIGINAL LINE 12 V headlight lamps / auxiliary lamps product range

Product Reference	ECE	Product Number	V	W				
64150	H1	4050300001487	12	55	P14.5s	1	100	5 ^{P.116}
64150-01B	H1	4050300925264	12	55	P14.5s	1	10	5 ^{P.116}
64173	H2	4050300016559	12	55	X511	1	100	6 ^{P.116}
64151	H3	4050300001554	12	55	PK22s	1	100	7 ^{P.116}



OSRAM ORIGINAL LINE 12 V headlight lamps / auxiliary lamps product range

Product Reference	ECE	Product Number	V	W				
64151-01B	H3	4050300925349	12	55	PK22s	1	10	7 ^{P.116}
64193	H4	4050300001470	12	60/55	P43t	1	100	8 ^{P.116}
64193-01B	H4	4050300925127	12	60/55	P43t	1	10	8 ^{P.116}
64210	H7	4050300332185	12	55	PX26d	1	100	9 ^{P.116}
64210-01B	H7	4050300925202	12	55	PX26d	1	10	9 ^{P.116}
64212	H8	4050300498751	12	35	PGJ19-1	1	100	10 ^{P.116}
64212-01B	H8	4052899262478	12	35	PGJ19-1	1	10	10 ^{P.116}
64242 ¹⁾	H8B	4008321055422	12	35	PGJY19-1	1	100	11 ^{P.116}
64213	H9	4050300524368	12	65	PGJ19-5	1	100	12 ^{P.116}
64243 ¹⁾	H9B	4008321055477	12	65	PGJY19-5	1	100	13 ^{P.116}
9145	H10	4052899348622	12	42	PY20d	1	100	14 ^{P.116}
64211	H11	4050300524313	12	55	PGJ19-2	1	100	15 ^{P.116}
64211-01B	H11	4008321171252	12	55	PGJ19-2	1	10	15 ^{P.116}
64241 ¹⁾	H11B	4008321054654	12	55	PGJY19-2	1	100	16 ^{P.116}
9008	H13	4008321939401	12	60/55	P26.4t	1	10	17 ^{P.116}
64176	H15	4008321218391	12	55/15	PGJ23t-1	1	100	18 ^{P.116}
64219L+	H16	4008321626783	12	19	PGJ19-3	1	100	19 ^{P.116}
64180L	H18	4052899479968	12	55	PY26d-1	1	100	20 ^{P.116}
64181L	H19	4052899599017	12	60/55	PU43t-3	1	100	21 ^{P.116}
880	H27W/1	4008321542977	12	27	PG13	1	100	32 ^{P.116}
881	H27W/2	4008321543004	12	27	PGJ13	1	100	32 ^{P.116}
9005	HB3	4050300137193	12	60	P20d	1	100	23 ^{P.116}
9005-01B	HB3	4008321171214	12	60	P20d	1	10	23 ^{P.116}
9005XS	HB3A	4052899982567	12	60	P20d	1	100	24 ^{P.116}
9006	HB4	4050300012650	12	51	P22d	1	100	25 ^{P.116}
9006-01B	HB4	4008321171238	12	51	P22d	1	10	25 ^{P.116}
9006XS	HB4A	4008321554284	12	51	P22d	1	100	26 ^{P.116}
9007	HB5	4050300148816	12	65/55	PX29t	1	200	27 ^{P.116}
9011	HIR1	4008321863966	12	65	PX20d	1	100	28 ^{P.116}
9012	HIR2	4008321863997	12	55	PX22d	1	100	28 ^{P.116}
7506	P21W	4050300838120	12	21	BA15s	10	50	38 ^{P.116}
7506-02B	P21W	Page 133	12	21	BA15s	2	20	38 ^{P.116}
7507 ²⁾	PY21W	4050300891477	12	21	BAU15s	10	50	38 ^{P.116}
7507-02B ²⁾	PY21W	Page 133	12	21	BAU15s	2	20	38 ^{P.116}
7225	P21/4W	4050300891514	12	21/4	BAZ15d	10	50	39 ^{P.116}
7225-02B	P21/4W	Page 133	12	21/4	BAZ15d	2	20	39 ^{P.116}
7240	-	4050300838007	12	21/5	BA15d	10	50	39 ^{P.116}
7528	P21/5W	4050300838069	12	21/5	BAY15d	10	50	39 ^{P.116}
7528-02B	P21/5W	Page 133	12	21/5	BAY15d	2	20	39 ^{P.116}
3860	-	4008321095756	12	5	BA9s	10	50	49 ^{P.117}
3893	T4W	4050300838489	12	4	BA9s	10	50	49 ^{P.117}
3893-02B	T4W	Page 134	12	4	BA9s	2	20	49 ^{P.117}
2820	-	4008321094094	12	2	W2.1x9.5d	10	50	51 ^{P.117}
2821	W3W	4050300838663	12	3	W2.1x9.5d	10	50	51 ^{P.117}
2821-02B	W3W	Page 134	12	3	W2.1x9.5d	2	20	51 ^{P.117}
2825	W5W	4050300838632	12	5	W2.1x9.5d	10	50	52 ^{P.117}
2825-02B	W5W	Page 134	12	5	W2.1x9.5d	2	20	52 ^{P.117}
2827NA ²⁾	WY5W	4052899570795	12	5	W2.1x9.5d	10	50	52 ^{P.117}
2827NA-02B ²⁾	WY5W	Page 134	12	5	W2.1x9.5d	2	20	52 ^{P.117}
2886X	-	4008321094667	12	6	W2.1x9.5d	10	50	52 ^{P.117}
921	W16W	4008321100948	12	16	W2.1x9.5d	10	50	53 ^{P.117}
921-02B	W16W	Page 134	12	16	W2.1x9.5d	2	20	53 ^{P.117}
921NA ²⁾	WY16W	4052899230460	12	16	W2.1x9.5d	10	50	54 ^{P.117}
7504 ²⁾	WY21W	4008321165473	12	21	WX3x16d	10	50	55 ^{P.117}
7505	W21W	4052899324244	12	21	W3x16d	10	50	55 ^{P.117}
7505-02B	W21W	Page 134	12	21	W3x16d	2	20	55 ^{P.117}



OSRAM ORIGINAL LINE 12 V headlight lamps / auxiliary lamps product range

Product Reference	ECE	Product Number	V	W				
7515	W21/5W	4052899 324312	12	21/5	W3x16q	10	50	56 ^{P.117}
7515-02B	W21/5W	Page 134	12	21/5	W3x16q	2	20	56 ^{P.117}
2721	-	4050300 838540	12	1.2	W2x4.6d	10	50	58 ^{P.117}
2721-02B	-	Page 134	12	1.2	W2x4.6d	2	20	58 ^{P.117}
2722	-	4008321 094803	12	2	W2x4.6d	10	50	58 ^{P.117}
2722-02B	-	Page 134	12	2	W2x4.6d	2	20	58 ^{P.117}
2723	W2.3W	4008321 094834	12	2.3	W2x4.6d	10	50	50 ^{P.117}
64132	H6W	4008321 094896	12	6	BAX9s	10	50	37 ^{P.116}
64136	H21W	4008321 095190	12	21	BAY9s	10	50	34 ^{P.116}
5007	R5W	4050300 838427	12	5	BA15s	10	50	48 ^{P.117}
5007-02B	R5W	Page 134	12	5	BA15s	2	20	48 ^{P.117}
5008	R10W	4050300 838212	12	10	BA15s	10	50	48 ^{P.117}
5008-02B	R10W	Page 134	12	10	BA15s	2	20	48 ^{P.117}
5009 ²⁾	RY10W	4008321 095442	12	10	BAU15s	10	50	48 ^{P.117}
6411	-	4050300 891354	12	10	SV8.5-8	10	50	61 ^{P.117}
6411-02B	-	Page 134	12	10	SV8.5-8	2	20	61 ^{P.117}
64111 ³⁾	-	4008321 095015	12	5	BA9s	10	50	65 ^{P.117}
64111-02B ³⁾	-	Page 134	12	5	BA9s	2	20	65 ^{P.117}
64113	-	4008321 095046	12	10	BA9s	10	50	65 ^{P.117}
64115	-	4008321 095077	12	20	BA9s	10	50	65 ^{P.117}
6413	-	4050300 891439	12	5	SV8.5-8	10	50	61 ^{P.117}
6418	C5W	4050300 838397	12	5	SV8.5-8	10	50	36 ^{P.116}
6418-02B	C5W	Page 134	12	5	SV8.5-8	2	20	36 ^{P.116}
6428	-	4008321 094384	12	3	SV7-8	10	50	62 ^{P.117}
6438	-	4008321 094353	12	10	SV8.5-8	10	50	63 ^{P.117}
6438-02B	-	Page 134	12	10	SV8.5-8	2	20	63 ^{P.117}
6461	-	4008321 094261	12	10	SV8.5-8	10	50	64 ^{P.117}
6486X	-	4008321 094292	12	6	SV8.5-8	10	50	-
2351MFX6	-	4008321 096852	12	1.2	BX8.4d	10	50	66 ^{P.117}
2352MFX6	-	4008321 097149	12	2	BX8.4d	10	50	67 ^{P.117}
2452MFX6	-	4008321 097118	12	1.5	BX8.4d	10	50	68 ^{P.117}
2473MFX6	-	4008321 096821	12	1.12	BX8.4d	10	50	69 ^{P.117}
2721MFX	-	4008321 297150	12	1.2	BX8.5d	10	50	71 ^{P.117}
2722MFX	-	4008321 297181	12	2	BX8.5d	10	50	73 ^{P.117}
2721MF	-	4050300 891255	12	1.2	B8.5d	10	50	70 ^{P.117}
2722MF	-	4008321 096791	12	2	B8.5d	10	50	72 ^{P.117}
828	P13W	4062172 094283	12	13	PG18.5d-1	1	100	75 ^{P.117}
3156	P27W	4008321 090621	12	27	W2.5x16d	10	50	40 ^{P.116}
3157	P27/7W	4052899 183414	12	27/7	W2.5x16q	10	50	41 ^{P.116}
3757AK ²⁾	PY27/7W	4052899 178731	12	27/7	WX2.5x16q	10	50	42 ^{P.116}
3796	-	4050300 891309	12	2	Ba9s	10	50	60 ^{P.117}
5201	PS19W	4052899 600546	12	19	PG20-1	1	100	45 ^{P.117}
5202	PS24W	4052899 600584	12	24	PG20-3	1	100	46 ^{P.117}
2504	PSX24W	4052899 600560	12	24	PG20-7	1	100	47 ^{P.117}
6851	PSX26W	4062172 160100	12	26	PG18.5d-3	1	100	75 ^{P.117}

Available from December 2020

Available from December 2020

- 1) Successor type for BILUX®-AS® lamp (product reference 7951)
 2) Amber lamps for clear indicator lights
 3) Also available with glass base (product reference 6411150 or 6411350)

The suffix on the product reference indicates the board thickness:
 MFX6: 1.5 mm
 MF: 2.0 mm
 MFX: 1.5 mm



OSRAM MINIBOX

Mobile lamp replacement

Defects in a vehicle usually make themselves known on long journeys. The OSRAM MINIBOX saves you the trouble of searching for a suitable workshop to purchase replacement lamps. You can therefore easily fix the problem yourself.



Features

- Range of most important spare lamps
- Clear labeling and application illustration
- Reserve light for cars
- Original spare parts that exceed all ECE minimum standards

Benefits

- You'll always have the right spare lamps at hand
- Easy identification
- Mandatory in many countries
- Premium quality made in Germany

OSRAM MINIBOX product range



H1 ORIGINAL box

The H1 box is equipped with one H1 headlight lamp and contains the following five most important spare lamps and three flat fuses.

H4 ORIGINAL box

The H4 box is equipped with one H4 headlight lamp and contains the following five most important spare lamps and three flat fuses.

H7 ORIGINAL box

The H7 box is equipped with one H7 headlight lamp and contains the following five most important spare lamps and three flat fuses.

H1/H7 ORIGINAL box

The H1/H7 box is equipped with one H1 and one H7 headlight lamp and contains the following five most important spare lamps and three flat fuses.

	Product Number	Product Reference	ECE	i
H1 box	4050300875217	CLK H1	H1	Headlight + five spare lamps and three flat fuses
H4 box	4050300873398	CLK H4	H4	Headlight + five spare lamps and three flat fuses
H7 box	4050300876375	CLK H7	H7	Headlight + five spare lamps and three flat fuses
H1/H7 box	4052899522640	CLK H1/H7	H1/H7	Headlights + five spare lamps and three flat fuses
All boxes		7506	P21W	Brake and tail light
		7507	PY21W	Indicator light, amber
		7528	P21/5W	Brake/tail light
		5007	R5W	Tail light and license plate light
		2825	W5W	Parking light
				15A, 20A, 30A flat fuses



Halogen lamps for buses and trucks – extreme durability, extreme high-performance

Truck and commercial vehicle lamps in daily use are often pushed to their performance limit. Lighting systems must therefore be enormously durable and extremely reliable – only then can they provide perfect light until the end of each run. The extremely long life of OSRAM high performance solutions enhances driving comfort and reduces maintenance time and fleet costs. Vehicle drivers and fleet managers can choose from a wide range of high performance truck lamps at OSRAM. All lighting solutions not only meet the highest quality requirements and offer OEM quality, but also exceed even European standards.



OSRAM TRUCKSTAR® PRO

Brightest OSRAM truck light

Up to 100% more brightness compared to the minimum legal standard, extra lifetime and very high vibration resistance are ideal for professional drivers while reducing downtime and fleet costs.



Features

- Up to 100% more brightness¹⁾
- More than double the service life²⁾
- Very high vibration resistance

Benefits

- More light allows to see farther and therefore react sooner
- Reduced downtime and fleet costs
- Suitable for heavy duty applications



OSRAM TRUCKSTAR® PRO product range

Product Reference	ECE	Product Number	V	W				
64155TSP	H1	4008321784179	24	70	P14.5s	1	100	5 ^{P.116}
64155TSP-HCB	H1	Page 134	24	70	P14.5s	2	10	5 ^{P.116}
64156TSP	H3	4008321784261	24	70	PK22s	1	100	7 ^{P.116}
64156TSP-01B	H3	Page 134	24	70	PK22s	1	10	7 ^{P.116}
64156TSP-HCB	H3	Page 134	24	70	PK22s	2	10	7 ^{P.116}
64196TSP	H4	4008321785046	24	75/70	P43t	1	100	8 ^{P.116}
64196TSP-HCB	H4	Page 134	24	75/70	P43t	2	10	8 ^{P.116}
64215TSP	H7	4008321785114	24	70	PX26d	1	100	9 ^{P.116}
64215TSP-HCB	H7	Page 134	24	70	PX26d	2	10	9 ^{P.116}
64216TSP	H11	4052899904804	24	70	PGJ19-2	1	100	15 ^{P.116}
64216TSP-HCB	H11	Page 134	24	70	PGJ19-2	2	10	15 ^{P.116}
7510TSP ³⁾	PY21W	4008321798169	24	21	BAU15s	10	50	38 ^{P.116}
7511TSP	P21W	4052899340459	24	21	BA15s	10	50	38 ^{P.116}
7537TSP	P21/5W	4008321798138	24	21/5	BAY15d	10	50	39 ^{P.116}
2845TSP	W5W	4008321798077	24	5	W2.1x9.5d	10	50	52 ^{P.117}
5627TSP	R5W	4008321795151	24	5	BA15s	10	50	48 ^{P.117}
5637TSP	R10W	4008321795205	24	10	BA15s	10	50	48 ^{P.117}
3930TSP	T4W	4008321795106	24	4	BA9s	10	50	49 ^{P.117}
3930TSP-02B	T4W	Page 134	24	4	BA9s	2	20	49 ^{P.117}

1) Compared to minimum ECE R112 requirements | 2) Compared with standard lamps | 3) Amber lamps for clear indicator lights



OSRAM ORIGINAL LINE 24 V

Original spare part for trucks

A balanced and economic solution for all standard requirements in the 24 V sector. Successfully used in millions of new vehicles from renowned manufacturers, whether as standard initial equipment or original spare parts.



Features

- OEM Quality
- Original spare parts that exceed all ECE minimum standards
- Wide product range

Benefits

- Tried and trusted in millions of vehicles of well-known manufacturers
- Premium quality made in Europe
- Suitable for the most common applications

The suffix on the product reference indicates the board thickness:

MF: 2.0 mm

MFX: 1.5 mm



OSRAM ORIGINAL LINE 24 V headlight lamps / auxiliary lamps product range

Product Reference	ECE	Product Number	V	W				No.
64155	H1	4050300016498	24	70	P14.5s	1	100	5 ^{P.116}
64155-01B	H1	Page 134	24	70	P14.5s	1	10	5 ^{P.116}
64175	H2	4050300218960	24	70	X511	1	100	6 ^{P.116}
64156	H3	4050300016535	24	70	PK22s	1	100	7 ^{P.116}
64156-01B	H3	Page 134	24	70	PK22s	1	10	7 ^{P.116}
64196	H4	4050300016542	24	75/70	P43t	1	100	8 ^{P.116}
64196-01B	H4	Page 134	24	75/70	P43t	1	10	8 ^{P.116}
94196	H4	4050300250632	24	75/70	P43t	1	100	8 ^{P.116}
64215	H7	4050300386522	24	70	PX26d	1	100	9 ^{P.116}
64215-01B	H7	Page 134	24	70	PX26d	1	10	9 ^{P.116}
64177	H15	4008321536556	24	20/60	PGJ23t-1	1	100	18 ^{P.116}
7511	P21W	4050300838090	24	21	BA15s	10	50	38 ^{P.116}
7511-02B	P21W	Page 134	24	21	BA15s	2	20	38 ^{P.116}
7537	P21/5W	4050300838038	24	21/5	BAY15d	10	50	39 ^{P.116}
7537-02B	P21/5W	Page 134	24	21/5	BAY15d	2	20	39 ^{P.116}
7529	-	4050300891774	24	15	BA15s	10	50	38 ^{P.116}
5626	R5W	4008321095336	24	5	BA15d	10	50	48 ^{P.117}
5627	R5W	4050300838335	24	5	BA15s	10	50	48 ^{P.117}
5627-02B	R5W	Page 134	24	5	BA15s	2	20	48 ^{P.117}
5637	R10W	4050300831459	24	10	BA15s	10	50	48 ^{P.117}
5637-02B	R10W	Page 134	24	10	BA15s	2	20	48 ^{P.117}
3797	-	4050300891668	24	2	BA9s	10	50	49 ^{P.117}
3930	T4W	4050300838366	24	4	BA9s	10	50	49 ^{P.117}
3930-02B	T4W	Page 134	24	4	BA9s	2	20	49 ^{P.117}
64138	H21W	4008321094988	24	21	BAY9s	10	50	34 ^{P.117}
2341	-	4008321132529	24	1	W2x4.6d	10	50	57 ^{P.117}
2840	-	4008321094698	24	2	W2.1x9.5d	10	50	59 ^{P.117}
2841	W3W	4008321094728	24	3	W2.1x9.5d	10	50	51 ^{P.117}
2841-02B	W3W	Page 134	24	3	W2.1x9.5d	2	20	51 ^{P.117}
2845	W5W	4050300891552	24	5	W2.1x9.5d	10	50	52 ^{P.117}
2845-02B	W5W	Page 134	24	5	W2.1x9.5d	2	20	52 ^{P.117}
2741	-	4050300838519	24	1.2	W2x4.6d	10	50	58 ^{P.117}
6421	-	4008321090768	24	3	SV8.5-8	10	50	61 ^{P.117}
6423	C5W	4050300831435	24	5	SV8.5-8	10	50	36 ^{P.116}
6423-02B	C5W	Page 134	24	5	SV8.5-8	2	20	36 ^{P.116}
6424	-	4050300891712	24	5	SV8.5-8	10	50	61 ^{P.117}
6429	-	4008321090836	24	10	SV8.5-8	10	50	61 ^{P.117}
6430	-	4008321094414	24	3	SV8.5-8	10	50	62 ^{P.117}
2741MF ⁽¹⁾	-	4050300891606	24	1.2	B8.5d	10	50	74 ^{P.117}
2741MFX ⁽¹⁾	-	4008321297211	24	1.2	BX8.5d	10	50	74 ^{P.117}



OSRAM spare lamp kit 24 V

Reserve light for trucks and buses

Professional truck drivers in particular rely on spare lamp kits from OSRAM. They can be used to repair faults without assistance or major work, wherever required.



Features

- Range of most important spare lamps
- Clear labeling and application illustration
- Original spare parts that exceed all ECE minimum standards

Benefits

- You'll always have the right spare lamps at hand
- Easy identification
- Premium quality made in Germany



OSRAM spare lamp box, 24V product range

H7 TRUCKSTAR® PRO box

The TRUCKSTAR® PRO box is equipped with two H7 TRUCKSTAR® PRO headlight lamps and contains the following double sets of the six most important spare lamps and three flat fuses.

Product Number: 4008321809063

Product Reference

ECE

i

64215TSP	H7	Headlight
7511TSP	P21W	Brake and tail light
7510TSP	PY21W	Indicator light, amber
7537TSP	P21/5W	Brake/tail light
5627TSP	R5W	Tail light and license plate light
5637TSP	R10W	Parking light
3930TSP	T4W	Park and position light
15 A, 20 A, 30 A flat fuses		

H4 ORIGINAL box

The H4 box is equipped with two H4 headlight lamps and contains the following double sets of the six most important spare lamps and three flat fuses.

Product Number: 4008321583192

Product Reference

ECE

i

64196	H4	Headlight
7511	P21W	Brake and tail light
7510TSP	PY21W	Indicator light, amber
7537	P21/5W	Brake/tail light
5627	R5W	Tail light and license plate light
5637	R10W	Parking light
3930	T4W	Park and position light
15 A, 20 A, 30 A flat fuses		

H7 ORIGINAL box

The H7 box is equipped with two H7 headlight lamps and contains the following double sets of the six most important spare lamps and three flat fuses.

Product Number: 4008321583215

Product Reference

ECE

i

64215	H7	Headlight
7511	P21W	Brake and tail light
7510TSP	PY21W	Indicator light, amber
7537	P21/5W	Brake/tail light
5627	R5W	Tail light and license plate light
5637	R10W	Parking light
3930	T4W	Park and position light
15 A, 20 A, 30 A flat fuses		



Halogen lamps for motorcycles and scooters – safety first

Motorcycles, mopeds, or scooters are all too often overlooked in traffic – especially at night. The right lighting can save lives. Drivers of motorized two-wheelers value OSRAM motorcycle lamps for their high performance and high vibration resistance proven in tests. Alongside increased safety, OSRAM offers bikers with motorcycle lamps a wide variety of customization options from the design, performance, and original portfolio.



Please note: the dedicated motorcycle portfolio will be discontinued step-by-step. OSRAM offers a wide range of lighting product for car and motorcycle use - please refer to the extensive vehicle lighting portfolio.



OSRAM motorcycle lamps

Vibration-resistant technology

Power and emotion, for relaxed cruisers and sportive riders: With NIGHT RACER® 110, NIGHT RACER® 90, NIGHT RACER® 50, X-RACER® and ORIGINAL, OSRAM offers a wide range of high performance motorcycle lamps – opening a new dimension for life on two wheels.



Features of

NIGHT RACER® 110

- Up to 110% more brightness¹⁾
- Up to 40 m longer beam²⁾
- Up to 20% whiter light¹⁾
- Vibration-resistant technology
- Partial blue coating and silver cap

Features of

NIGHT RACER® 90

- Up to 90% more brightness¹⁾
- Up to 30 m longer beam²⁾
- Up to 10% whiter light¹⁾
- Vibration-resistant technology
- Partial blue coating and silver cap

Features of NIGHT RACER® 50

- Up to 50% more brightness¹⁾
- Up to 20 m longer beam²⁾
- Vibration-resistant technology
- Modern design with silver cap
- Excellent performance-lifetime ratio

Benefits of NIGHT RACER® 110 / NIGHT RACER® 90

- More light allows to see farther and therefore react sooner
- Better visibility
- Modern look
- Tested for resilience with speed and changing road surfaces
- Eye-catching design

Benefits of NIGHT RACER® 50

- More light allows to see farther and therefore react sooner
- Better visibility
- Tested for resilience with speed and changing road surfaces
- Ideal for use in clear-glass headlights
- More light at a reasonable lifetime





OSRAM NIGHT RACER® 110 product range³⁾

Product Reference	ECE	Product Number	V	W				
64193NR1-01B	H4	Page 134	12	60/55	P43t	1	10	8 ^{P.116}
64193NR1-02B	H4	4052899 929678	12	60/55	P43t	2	20	8 ^{P.116}
64210NR1-01B	H7	Page 134	12	55	PX26d	1	10	9 ^{P.116}
64210NR1-02B	H7	4052899 929616	12	55	PX26d	2	20	9 ^{P.116}
64212NR1-01B	H8	Page 134	12	35	PGJ19-1	2	20	10 ^{P.116}
64211NR1-01B	H11	Page 134	12	55	PGJ19-2	1	10	15 ^{P.116}

OSRAM NIGHT RACER® 90 product range³⁾

Product Reference	ECE	Product Number	V	W				
64185NR9-01B	HS1	Page 134	12	35/35	PX43t	1	10	30 ^{P.116}

OSRAM NIGHT RACER® 50 product range³⁾

Product Reference	ECE	Product Number	V	W				
64193NR5-01B	H4	Page 134	12	60/55	P43t	1	10	8 ^{P.116}
64210NR5-01B	H7	Page 134	12	55	PX26d	1	10	9 ^{P.116}
64211NR5-01B	H11	Page 134	12	55	PGJ19-2	1	10	15 ^{P.116}
64185NR5	HS1	4052899 933002	12	35/35	PX43t	1	10	30 ^{P.116}
64185NR5-01B	HS1	Page 134	12	35/35	PX43t	1	10	30 ^{P.116}

1) Compared to minimum ECE R112/R37 requirements

2) Compared with standard lamps

3) The NIGHT RACER® 110/90/50 portfolio will be discontinued. For a wide range of motorcycle lighting possibilities, please see our product portfolio for use in cars and motorcycles.



Features of X-RACER®

- Bluish-white light for xenon look
- Color temperatures of up to 4,200 K
- Up to 20% more brightness¹⁾
- Vibration-resistant technology
- Modern design with silver cap

Benefits of X-RACER®

- Modern and stylish look
- High contrast
- More light allows to see farther and therefore react sooner
- Tested for resilience with speed and changing road surfaces
- Ideal for use in clear-glass headlights

Features of ORIGINAL

- OEM Quality
- Original spare parts that exceed all ECE minimum standards
- Wide product range

Benefits of ORIGINAL

- Tried and trusted in millions of vehicles of well-known manufacturers
- Premium quality
- Suitable for the most common headlights



OSRAM X-RACER® product range²⁾

Product Reference	ECE	Product Number	V	W				
64193XR-01B	H4	Page 134	12	60/55	P43t	1	20	8 ^{P.116}
64193XR-02B	H4	4052899 929630	12	60/55	P43t	2	20	8 ^{P.116}
64210XR-01B	H7	Page 134	12	55	PX26d	1	20	9 ^{P.116}
64210XR-02B	H7	4052899 929579	12	55	PX26d	2	20	9 ^{P.116}
64212XR-01B	H8	Page 134	12	35	PGJ19-1	1	10	10 ^{P.116}
64211XR-01B	H11	Page 134	12	55	PGJ19-2	1	10	15 ^{P.116}
64185XR-01B	HS1	Page 134	12	35/35	PX43t	1	10	30 ^{P.116}
64327XR-01B	S2	Page 134	12	35/35	BA20d	1	10	33 ^{P.116}

OSRAM ORIGINAL product range

Product Reference	ECE	Product Number	V	W				
64193MC ³⁾	H4	4052899 451353	12	60/55	P43t	1	20	8 ^{P.116}
64210MC ³⁾	H7	4052899 451384	12	55	PX26d	1	20	9 ^{P.116}
64326	S1	4052899 157774	12	25/25	BA20d	1	100	33 ^{P.116}
64327	S2	4052899 136755	12	35/35	BA20d	1	100	33 ^{P.116}
64327-01B	S2	Page 135	12	35/35	BA20d	1	10	33 ^{P.116}
64183	R2	4050300 350554	12	45/40	P45t	1	100	31 ^{P.116}
64183-01B	R2	4050300 925400	12	45/40	P45t	1	10	31 ^{P.116}
64185	HS1	4050300 439969	12	35/35	PX43t	1	100	30 ^{P.116}
64185-01B	HS1	Page 135	12	35/35	PX43t	1	10	30 ^{P.116}

1) Compared to minimum ECE R112 requirements

2) The X-RACER® portfolio will be discontinued. For a wide range of motorcycle lighting possibilities, please see our product portfolio for use in cars and motorcycles.

3) The non-dedicated ORIGINAL products for motorcycle use will be discontinued. For a wide range of motorcycle lighting possibilities, please see our product portfolio for use in cars and motorcycles.



Lamps for off-road use – best light, even off-road¹⁾

Whether for competitions and races, construction and transport work, agriculture and forestry, or an enthusiast off-roader, driving off-road demands everything of lighting systems. Thanks to many years of experience in off-road driving, OSRAM knows exactly what these drivers want. In addition to robustness, resistance, and stability, above all they want outstanding and reliable lighting performance. The answer is a strong OSRAM product range of off-road lamps with high wattage that impress with excellent brightness and high color temperature in absolutely any environment.



SUPER BRIGHT PREMIUM / SUPER BRIGHT

Extra power for off-road use

With a strong portfolio of high-wattage off-road lamps with extra power, OSRAM provides solutions for even the most unusual requirements. All lamps are designed and designated for off-road use only and not permitted on public roads¹⁾.



Features¹⁾

- Extra power due to high wattage
- Excellent brightness
- Rugged and versatile

Benefits¹⁾

- For the most difficult terrain: rescue services, construction and transport work, agriculture and forestry
- More light allows to see farther and therefore react sooner
- Solution for even the most unusual requirements



OSRAM SUPER BRIGHT PREMIUM / SUPER BRIGHT high-performance headlamps¹⁾ – product range

Product Reference		Product Number	V	W			No.
62200SBP	P14.5s (H1)	4052899 126282	12	100	1	100	5 ^{P.116}
62201SBP	PK22s (H3)	4052899 126312	12	100	1	100	7 ^{P.116}
62204SBP	P43t (H4)	400832 1856357	12	100/90	1	100	8 ^{P.116}
62261SBP	PX26d (H7)	400832 1856388	12	80	1	100	9 ^{P.116}
69005SBP	P20d (HB3)	400832 1888174	12	100	1	100	23 ^{P.116}
69006SBP	P22d (HB4)	400832 1888228	12	80	1	100	25 ^{P.116}
64152SB	PX14.5s	4050300 222738	12	100	1	100	5 ^{P.116}
64153SB	PKY22s	4050300 222837	12	100	1	100	7 ^{P.116}
64198SB	P45t (R2)	4050300 222028	12	60/55	1	100	31 ^{P.116}

¹⁾ These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.



XENARC® COOL BLUE® BOOST / COOL BLUE® BOOST

Hyper blue light for off-road use

The COOL BLUE® BOOST and XENARC® COOL BLUE® BOOST product families convince with hyper blue light and high color temperatures. All lamps are designed and designated for off-road use only and not permitted on public roads¹⁾.



Features of

XENARC® COOL BLUE® BOOST¹⁾

- Hyper blue light due to a special filling system used instead of conventional coating
- Color temperatures of up to 7,000 K
- Enhanced brightness

Features of

COOL BLUE® BOOST¹⁾

- Hyper blue light
- Color temperatures of up to 5,000 K
- Up to 50% more light²⁾

Benefits of

XENARC® COOL BLUE® BOOST¹⁾ / COOL BLUE® BOOST¹⁾

- Modern look
- High contrast
- More light allows to see farther and therefore react sooner



OSRAM XENARC® COOL BLUE® BOOST high-performance headlamps¹⁾ – product range

Product Reference		Product Number	V	W				No.
66140CBB-HCB	PK32d-2 (D1S)	Page 135	85	35	2	10		1 ^{P.116}
66240CBB-HCB	P32d-2 (D2S)	Page 135	85	35	2	10		3 ^{P.116}
66340CBB-HCB	PK32d-5 (D3S)	Page 135	42	35	2	10		1 ^{P.116}
66440CBB-HCB	P32d-5 (D4S)	Page 135	42	35	2	10		3 ^{P.116}

OSRAM COOL BLUE® BOOST high-performance headlamps¹⁾ – product range

Product Reference		Product Number					
62150CBB-HCB	P14.5s (H1)	Page 135	12	80	2	20	5 ^{P.116}
62193CBB-HCB	P43t (H4)	Page 135	12	100/90	2	20	8 ^{P.116}
62210CBB-HCB	PX26d (H7)	Page 135	12	80	2	20	9 ^{P.116}
62213CBB-HCB	PGJ19-5 (H9)	Page 135	12	75	2	20	12 ^{P.116}
62211CBB-HCB	PGJ19-2 (H11)	Page 135	12	80	2	20	15 ^{P.116}
69005CBB-HCB	P20d (HB3/HB3A)	Page 135	12	100	2	20	23/24 ^{P.116}
69006CBB-HCB	P22d (HB4/HB4A)	Page 135	12	80	2	20	25/26 ^{P.116}

1) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.

2) Compared with other blue coated halogen lamps



Bringing light to life OSRAM LEDriving® fixtures

OSRAM has been turning night into day for over 110 years. With a history of pioneering technology and a future of ground-breaking innovations, you can rely on proven performance from the OSRAM LEDriving® products.

Driven by our striving for innovation and quality, we are redefining vehicle lighting from OSRAM. At OSRAM there is no compromise when it comes to quality and performance. A combination of individual design and innovative lighting technology meets high efficiency and effectiveness. OSRAM brings precise lighting to your vehicle and on the road.





OSRAM LEDriving® headlights

High efficiency meets extreme effectiveness

ECE
compliant

The OSRAM LEDriving® headlights bring precise lighting to the front of your vehicle and onto the road. The headlights are equipped with LED position light, LED low beam, LED high beam, LED daytime running light and dynamic LED indicator. Thanks to long-life high-performance LEDs with intensive brightness, they score with up to 200% more light¹⁾, impress with up to 100% whiter light²⁾ and are characterized by a lighting range that can reach up to 200m. The OSRAM LEDriving® headlights are completely legal on public roads. Upgrading to the ECE-approved LEDriving® headlights complies with all legal requirements.

Features

- OSRAM full LED head light:
LED position light, LED low beam, LED high beam,
LED daytime running light and dynamic LED turn
indicator
- High-performance long-life LEDs
- State-of-the art diffuser material
- Up to 200% more light¹⁾
- Up to 100% whiter light²⁾
- Up to 200m long light beam
- Plug & Play installation
- ECE certified (ECE R6/R7/R48/R87/R112)
- IP protection class: IP69K

Benefits

- Upgrade to the latest OEM premium technology
- Linear and homogeneous light distribution
- Pixel-free optics
- Improved view for the driver and more visibility of your
vehicle by other road users, resulting in increased
road safety
- Quick and uncomplicated installation without
modifying or damaging existing cables
- Completely legal in road traffic
- Resistant to water, dust, cold and warm temperatures,
UV light and permanent vibrations & shocks
- 2-year OSRAM Guarantee³⁾




OSRAM LEDriving® headlights for VW Golf VII as halogen replacement – product range


Product Reference	Product Number	V	W	K	l [mm]	w [mm]	h [mm]			No.
LEDHL103-GT ⁽⁴⁾⁽⁵⁾	4052899 599628	12	-	6500	422	420	239	1	1	2 ^{P.111}
LEDHL103-CM ⁽⁴⁾⁽⁵⁾	4052899 599611	12	-	6500	422	420	239	1	1	2 ^{P.111}
LEDHL103-CM RHD ⁽⁵⁾⁽⁶⁾	4062172 176026	12	-	6500	422	420	239	1	1	2 ^{P.111}
LEDHL103-BK ⁽⁴⁾⁽⁵⁾	4052899 599598	12	-	6500	422	420	239	1	1	2 ^{P.111}

OSRAM LEDriving® headlights for VW Golf VII as xenon replacement – product range


Product Reference	Product Number	V	W	K	l [mm]	w [mm]	h [mm]			No.
LEDHL104-GT ⁽⁴⁾⁽⁵⁾	4052899 604933	12	-	6500	422	420	239	1	1	2 ^{P.111}
LEDHL104-CM ⁽⁴⁾⁽⁵⁾	4052899 604919	12	-	6500	422	420	239	1	1	2 ^{P.111}
LEDHL104-BK ⁽⁴⁾⁽⁵⁾	4052899 604896	12	-	6500	422	420	239	1	1	2 ^{P.111}




High Beam &
Position Light




Low Beam &
Position Light



Daytime Running Light



Position Light



Position Light & Indicator

- 1) Compared to minimum ECE R112 requirements
- 2) Compared to standard headlights with halogen lamp
- 3) Refer to www.osram.com/am-guarantee for precise conditions
- 4) Not suitable for left-hand traffic
- 5) Refer to www.osram.com/am for detailed vehicle models
- 6) Suitable for left-hand traffic




OSRAM LEDriving® headlights for VW Amarok as halogen replacement – product range


Product Reference	Product Number	V	W	K	l (mm)	w (mm)	h (mm)			No.
LEDHL107-BK ⁴⁾⁵⁾	4052899 616240	12	-	6500	372	343	260	1	1	4 ^{P.111}
LEDHL107-BK RHD ⁵⁾⁶⁾	4062172 176033	12	-	6500	372	343	260	1	1	4 ^{P.111}




High Beam & Position Light



Daytime Running Light



Low Beam & Position Light



Position Light & Indicator

1) Compared to minimum ECE R112 requirements
2) Compared to standard headlights with halogen lamp
3) Refer to www.osram.com/am-guarantee for precise conditions
4) Not suitable for left-hand traffic
5) Refer to www.osram.com/am for detailed vehicle models
6) Suitable for left-hand traffic




OSRAM LEDriving® headlights for BMW F20/21 as halogen replacement – product range


Product Reference	Product Number	V	W	K	l (mm)	w (mm)	h (mm)			Light No.
LEDHL108-BK ⁴⁾⁵⁾	4062172 120333	12	-	6500	425	460	245	1	1	5 ^{P.111}
LEDHL108-CM ⁴⁾⁵⁾	4062172 120340	12	-	6500	425	460	245	1	1	5 ^{P.111}



Position Light



Daytime Running Light

Low Beam &
Position LightHigh Beam &
Position Light

Indicator

- 1) Compared to minimum ECE R112 requirements
- 2) Compared to standard headlights with halogen lamp
- 3) Refer to www.osram.com/am-guarantee for precise conditions
- 4) Not suitable for left-hand traffic
- 5) Refer to www.osram.com/am for detailed vehicle models

OSRAM LEDriving® XENARC® headlights

High efficiency meets extreme effectiveness

With its outstanding design, the LEDriving® XENARC® headlight combines modern LED daytime running light functionality with a powerful xenon lamp. With this headlight, OSRAM offers a solution for all VW Golf VI and Ford Focus 3 models not equipped with xenon headlights. Upgrading to the ECE-approved LEDriving® XENARC® headlight complies with all legal requirements – no need to fit automatic leveling or a headlight-cleaning system.



Features of LEDriving® XENARC® headlight for VW Golf VI

- Up to 70% more light¹⁾
- Up to 180 m long light beam
- Up to 40% whiter light²⁾
- Premium OSRAM quality available as GTI, BLACK and CHROME edition
- ECE certified with extra lifetime

Features of LEDriving® XENARC® headlight for Ford Focus 3

- Up to 70% more light¹⁾
- Up to 180 m long light beam
- Up to 40% whiter light²⁾
- Premium OSRAM quality
- ECE certified with extra lifetime

Benefits of LEDriving® XENARC® headlight for VW Golf VI and for Ford Focus 3

- More light allows to see farther and therefore react sooner thanks to pixel-free optic and state-of-the-art lightguide technology
- Better visibility due to daylight effect with easy plug & play installation without modifying or damaging existing cables
- High contrast and brilliantly cool white LED light for the most stylish look on the road
- 2-year guarantee³⁾
- No additional beam level adjustment and headlight cleaning system required, as well as no additional parts and no registration needed for installation

OSRAM LEDriving® XENARC® headlight for Ford Focus 3 – product range

Product Reference	Product Number	V	W	K	$\frac{l}{(mm)}$	$\frac{w}{(mm)}$	$\frac{h}{(mm)}$			No.
LEDHL105 ⁴⁾⁵⁾	4052899 600997	12	70	6000	690	400	220	1	1	3 ^{P.111}




Daytime Running Light



Position Light and Low Beam




Position Light and High Beam



Position Light and Indicator

OSRAM LEDriving® XENARC® headlight for VW Golf VI – product range

Product Reference	Product Number	V	W	K	$\frac{l}{(mm)}$	$\frac{w}{(mm)}$	$\frac{h}{(mm)}$			No.
LEDHL102-GT ⁴⁾⁵⁾	4052899 982178	12	70	-	410	450	200	1	1	1 ^{P.111}
LEDHL102-CM ⁴⁾⁵⁾	4052899 982154	12	70	-	410	450	200	1	1	1 ^{P.111}
LEDHL102-BK ⁴⁾⁵⁾	4052899 982130	12	70	-	410	450	200	1	1	1 ^{P.111}
LEDHL102-BK RHD ⁵⁾⁶⁾	4052899 519411	12	70	-	410	450	200	1	1	1 ^{P.111}



Daytime Running Light



Position Light and Low Beam



Position Light and High Beam

Position Light and Indicator
(Dynamic/Static)

- 1) Compared to minimum ECE R112 requirements
- 2) Compared to standard headlights with halogen lamp
- 3) Refer to www.osram.com/am-guarantee for precise conditions
- 4) Not suitable for left-hand traffic
- 5) Only suitable for VW Golf VI and Ford Focus 3 cars with OEM halogen headlight
- 6) Suitable for left-hand traffic

OSRAM LEDriving® dynamic mirror indicators

Individual design meets innovative lighting technology

The OSRAM LEDriving® dynamic mirror indicators offer an innovative design to impressively complement the individual look of your vehicle. They score, based on innovative high-performance LEDs, with up to 200% more brightness¹⁾ and impressive high contrast during day and night due to intensive yellow LED light²⁾. Thanks to the latest light guide technology, they also offer a homogeneous light distribution. As result of all these aspects, there is the possibility of an improved perception of your vehicle by oncoming traffic and consequently increased safety in road traffic. They are compatible with a variety of vehicle models and there are two variants to choose from: A black edition & a white edition. The OSRAM LEDriving® dynamic mirror indicators are completely legal on public roads. Upgrading to the ECE-approved LEDriving® dynamic mirror indicators complies with all legal requirements.

Features

- Fully dynamic LEDriving® mirror indicator
- High-performance long-life LEDs
- Plug & Play Installation
- Black & White Edition
- ECE certified (ECE R6/R10)
- State-of-the-art light guide technology
- IP-Protection Class IP6K9K
- 5-year guarantee³⁾

Benefits

- Up to 200% more brightness¹⁾
- High contrast day and night due to intensive yellow LED light²⁾
- Improved visibility of your vehicle by other road users, resulting in increased road safety
- Quick and uncomplicated installation without modifying or damaging existing cables
- Tinted black design & clear white design
- Completely legal in road traffic
- Linear and homogeneous light distribution
- Resistant to water, dust, cold and warm temperatures, UV light and permanent vibrations & shocks




OSRAM LEDDriving® Dynamic Mirror Indicator for VW Golf VII – product range

Product Reference	Product Number	V	W	K	$\frac{l}{[mm]}$	$\frac{w}{[mm]}$	$\frac{h}{[mm]}$			No.
LEDDMI 5G0 WT S ⁴⁾	4062172046534	12	2.4	2700	280	70	50	1	4	6 ^{P.111}
LEDDMI 5G0 BK S ⁴⁾	4062172046510	12	2.4	2700	280	70	50	1	4	6 ^{P.111}




OSRAM LEDDriving® Dynamic Mirror Indicator for VW Golf VI – product range

Product Reference	Product Number	V	W	K	$\frac{l}{[mm]}$	$\frac{w}{[mm]}$	$\frac{h}{[mm]}$			No.
LEDDMI 5K0 WT S ⁴⁾	4062172149105	12	4.9	2700	212	97	74	1	4	9 ^{P.111}
LEDDMI 5K0 BK S ⁴⁾	4062172149082	12	4.9	2700	212	97	74	1	4	9 ^{P.111}

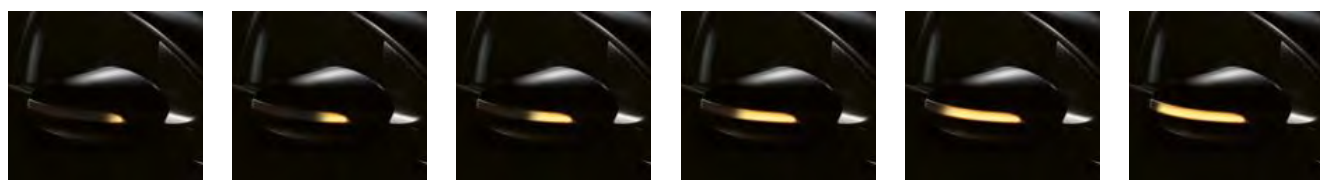

OSRAM LEDDriving® Dynamic Mirror Indicator for VW Passat B8 – product range

Product Reference	Product Number	V	W	K	$\frac{l}{[mm]}$	$\frac{w}{[mm]}$	$\frac{h}{[mm]}$			No.
LEDDMI 3G0 WT S ⁴⁾	4062172046497	12	2.4	2700	255	80	60	1	4	7 ^{P.111}

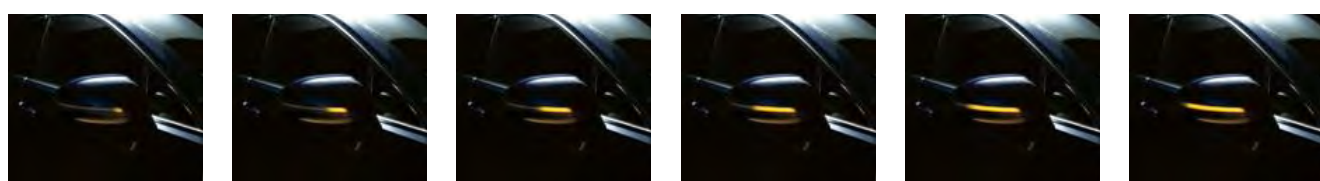

Check the compatibility of your car!

Vehicle Finder: https://www.osram.com/am/dmi_vehiclefinder.jsp




1) Compared to the minimum ECE R6 requirements 2) Compared to other mirror indicators 3) Refer to www.osram.com/am-guarantee for precise conditions 4) For precise car models please refer to www.osram.com/am



OSRAM LEDDriving® Dynamic Mirror Indicator for BMW F20 – product range

Product Reference	Product Number	V	W	K	l (mm)	w (mm)	h (mm)			Light No.
LEDDMI F20 WT S ¹⁾	4062172051286	12	4.56	2700	220	55	74	1	4	8 ^{P.111}
LEDDMI F20 BK S ¹⁾	4062172052795	12	4.56	2700	220	55	74	1	4	8 ^{P.111}

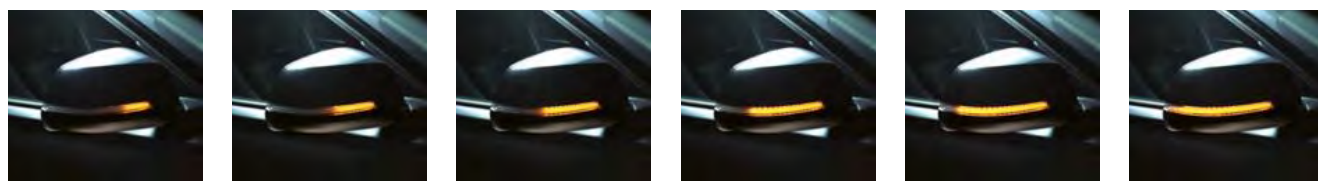

OSRAM LEDDriving® Dynamic Mirror Indicator for Seat Leon 5F – product range

Product Reference	Product Number	V	W	K	l (mm)	w (mm)	h (mm)			Light No.
LEDDMI 5F0 WT S ¹⁾	4062172052757	12	2.4	2700	237	54	50	1	4	12 ^{P.111}
LEDDMI 5F0 BK S ¹⁾	4062172052832	12	2.4	2700	237	54	50	1	4	12 ^{P.111}



1) For precise car models please refer to www.osram.com/am




OSRAM LEDDriving® Dynamic Mirror Indicator for Audi A4 B9 – product range

Product Reference	Product Number	V	W	K	l (mm)	w (mm)	h (mm)			Light No.
LEDDMI 8W0 WT S ¹⁾	4062172052733	12	2.4	2700	255	65	69	1	4	10 ^{P.111}
LEDDMI 8W0 BK S ¹⁾	4062172052818	12	2.4	2700	255	65	69	1	4	10 ^{P.111}



OSRAM LEDDriving® Dynamic Mirror Indicator for Audi A3 8V – product range

Product Reference	Product Number	V	W	K	l (mm)	w (mm)	h (mm)			Light No.
LEDDMI 8V0 WT S ¹⁾	4062172052771	12	2.4	2700	242	56	70	1	4	11 ^{P.111}
LEDDMI 8V0 BK S ¹⁾	4062172052856	12	2.4	2700	242	56	70	1	4	11 ^{P.111}

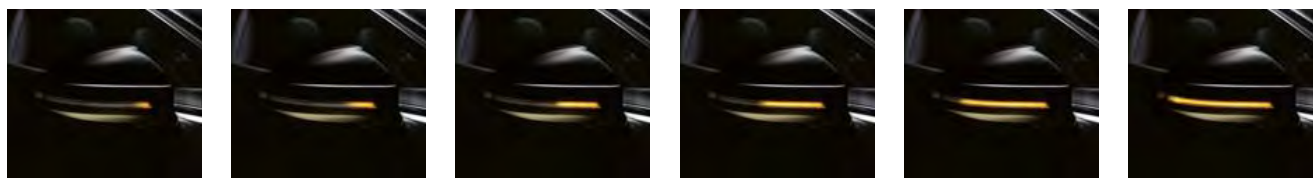

1) For precise car models please refer to www.osram.com/am



OSRAM LEDriving® tail lights

ECE
compliant

Putting your car's rear out in front

The OSRAM LEDriving® tail lights bring precise lighting to the rear of your vehicle and onto the road. Thanks to long-life high-performance LEDs with intensive brightness, they score with up to 80% less energy consumption, impress with excellent homogeneity thanks to modern diffuser material and are characterized by precise light without delays. The OSRAM LEDriving® tail lights are completely legal on public roads. Upgrading to the ECE-approved LEDriving® tail lights complies with all legal requirements.

Features


- OSRAM LED-tail lights
- LED position light, LED stop light, LED dynamic turn indicator
- High-performance long-life LEDs
- State-of-the-art diffuser material
- Up to 80% less energy consumption¹⁾
- No delayed response of the illumination
- Easy and quick plug & play installation
- IP Protection class: IP69K
- ECE certified (ECE R6/R7/R10/R23)
- 2 year OSRAM guarantee²⁾

Benefits


- Upgrade to the latest OEM premium technology
- Excellent light distribution within the tail light
- Extremely high efficiency and effectiveness
- Improved visibility and therefore increased safety on the road
- No modification or damaging of existing cables
- Resistance to water, dust, vibration, shocks and hot & cold temperature
- No registration in the vehicle documents necessary

OSRAM LEDriving® tail lights for VW Golf VI – product range


Product Reference	Product Number	V	W	K	l (mm)	w (mm)	h (mm)			No.
LEDTL102-CL	4052899617001	12	30	-	480	205	280	1	1	14 ^{P.111}




Stop Light & Position Light



Position Light & Indicator




Rear Fog Light & Position Light




Position Light

OSRAM LEDriving® tail lights for Ford Fiesta MK7 – product range


Product Reference	Product Number	V	W	K	l (mm)	w (mm)	h (mm)			No.
LEDTL101-CL	4052899616257	12	27	-	361	254	400	1	1	13 ^{P.111}




Stop Light & Position Light



Position Light & Indicator



Position Light & Reverse Light



Position Light

1) Compared to standard tail lights with halogen lamp

2) Refer to www.osram.com/am-guarantee for precise conditions



ECE
compliant

OSRAM LEDriving® driving lights

Powerful performance and versatile applications

If the road and the surroundings are to be illuminated more intensively, the OSRAM LEDriving® driving lights facing this challenge with ease. Thanks to a variety of designs, shapes and light profiles, they convince with intense white LED light, at work or in the spare time, on dark country roads and forest paths, on-road and off-road for a powerful near- and far-field illumination.

Features¹⁾

- ECE-Certification
- High-performance long-life LEDs
- Up to 5000h lifetime
- Shatterproof polycarbonate lens
- Integrated driver
- Integrated thermal management system
- Various shapes & beam patterns
- Highest IP-Protection Classes: IP67/IP69K

Benefits¹⁾

- No registration in the car documents required
- ECE-Certified
- Linear and homogeneous light distribution
- Improved view and visibility day & night resulting in increased safety
- Lightweight and at the same time robust and resistant
- Simple and reliable plug-in connection
- Protection against overheating
- Powerful far & near field illumination
- Resistant to extreme external influences regarding water, dust, impacts, heat & cold and permanent vibration & shocks

Functional series product range – OSRAM LED driving lights



Product Reference	Product Number	V	W	K	L [mm]	W [mm]	h [mm]			No.
LEDDL103-SP ¹⁾	4052899 595330	12/24	35	6000	309	93,5	54	1	4	17 ^{P.111}
LEDDL103-CB ¹⁾	4052899 595354	12/24	35	6000	309	93,5	54	1	4	17 ^{P.111}
LEDDL104-SP ¹⁾	4052899 595378	12/24	36	6000	564	93,5	54	1	4	18 ^{P.111}
LEDDL104-CB ¹⁾	4052899 595392	12/24	68	6000	564	93,5	54	1	4	18 ^{P.111}
LEDDL104-CB SM ²⁾	4052899 614079	12/24	68	6000	564	93,5	54	1	4	18 ^{P.111}
LEDDL114-CB SM ²⁾	4062172 154031	12/24	140	6000	1074	83	50	1	2	12 ^{P.112}

Slim series product range – OSRAM LED driving lights



Product Reference	Product Number	V	W	K	L [mm]	W [mm]	h [mm]			No.
LEDDL105-SP ¹⁾	4052899 595415	12/24	14	6000	182	63,5	38	1	8	19 ^{P.111}
LEDDL106-SP ¹⁾	4052899 595439	12/24	29	6000	350	63,5	38	1	4	1 ^{P.112}
LEDDL106-CB ¹⁾	4062172 142083	12/24	29	6000	350	61,5	38	1	4	1 ^{P.112}
LEDDL107-SP ¹⁾	4052899 595453	12/24	46	6000	556	63,5	38	1	4	2 ^{P.112}
LEDDL107-CB ¹⁾	4062172 142106	12/24	44	6000	556	61,5	38	1	4	2 ^{P.112}

1) Special mounting regulations apply | 2) Single Mount (SM), does not need to be installed in pairs for 12/24 V-vehicles



Multifunctional series product range – OSRAM LED driving lights

LEDDriving® LIGHTBAR MX140-SP (LEDDL102-SP)	LEDDriving® LIGHTBAR MX250-CB (LEDDL110-CB)	LEDDriving® ROUND MX180-CB (LEDDL111-CB)	LEDDriving® ROUND MX260-CB (LEDDL112-CB)	LEDDriving® CUBE MX240-CB (LEDDL113-CB)

Product Reference	Product Number	V	W	K	l [mm]	w [mm]	h [mm]			No.
LEDDL102-SP ¹⁾	4052899 595293	12/24	30/2	6000	140	69,2	67	1	8	16 ^{P.111}
LEDDL110-CB ¹⁾	4062172 153959	12/24	45/1	6000	390	86	54	1	4	5 ^{P.112}
LEDDL111-CB ¹⁾	4062172 153973	12/24	39/1	6000	176	126	201	1	4	6 ^{P.112}
LEDDL112-CB ¹⁾	4062172 153997	12/24	60/2.5	6000	261	251	150	1	2	7 ^{P.112}
LEDDL113-CB ¹⁾	4062172 154017	12/24	70/1.5	6000	241	169	134	1	2	8 ^{P.112}



Accessory series product range – OSRAM LED driving lights

Product Reference	Product Number	V	W	K	l [mm]	w [mm]	h [mm]			No.
LEDDL ACC 101 ¹⁾	4062172 147682	12	-	-	-	-	-	1	8	15 ^{P.112}
LEDDL ACC 102 ¹⁾	4062172 147729	12	-	-	-	-	-	1	8	16 ^{P.112}
LEDDL ACC 103 ¹⁾	4062172 147705	12	-	-	686	71	93	1	6	17 ^{P.112}



Value series product range – OSRAM LED driving lights



Product Reference	Product Number	V	W	K	l [mm]	w [mm]	h [mm]			No.
LEDDL115-SP ¹⁾	4062172 141888	12/24	27	6000	275	67	36	1	4	10 ^{P.112}
LEDDL116-SP ¹⁾	4062172 141918	12/24	63	6000	526	67	36	1	4	11 ^{P.112}
LEDDL117-CB ¹⁾	4062172 141932	12/24	30	6000	306	62	74	1	4	12 ^{P.112}
LEDDL118-CB ¹⁾	4062172 141956	12/24	55	6000	582	62	74	1	4	13 ^{P.112}
LEDDL119-WD ¹⁾	4062172 150712	12/24	22	6000	83	65	108	1	8	14 ^{P.112}
LEDDL108-WD ¹⁾	4062172 105712	12/24	15	6000	121	48	131	1	8	3 ^{P.112}
LEDDL109-WD ¹⁾	4062172 105736	12/24	15	6000	113	56	127	1	8	4 ^{P.112}

1) Special mounting regulations apply



OSRAM LEDriving® working lights

Professional light for professional work

If the working environment and the surroundings are to be illuminated more intensively, the OSRAM LEDriving® working lights facing this challenge with ease. Thanks to a variety of designs, shapes and light profiles, they convince with intense white LED light, at work, on construction sites, agricultural activities, in forest operations and on off-road tracks, for a powerful near- and far-field illumination.

Features

- High-performance long-life LEDs
- Up to 5000h lifetime
- Shatterproof polycarbonate lens
- Integrated driver
- Integrated thermal management system
- Powerful far & near field illumination
- Various beam angles
- Highest IP-Protection Classes: IP67/IP69K

Benefits

- Linear and homogeneous light distribution
- Improved view and visibility day & night resulting in increased safety for you and others
- Lightweight and at the same time robust and resistant
- Simple and reliable plug-in connection
- Protection against overheating
- Powerful far & near field illumination
- Resistant to extreme external influences regarding water, dust, impacts, heat & cold and permanent vibration & shocks



Multifunctional series product range – OSRAM LED working lights



LEDDriving® CUBE
MX85-SP
(LEDDL101-SP)



LEDDriving® CUBE
MX85-WD
(LEDDL101-WD)



LEDDriving® LIGHTBAR
MX140-WD
(LEDDL102-WD)

Product Reference	Product Number	V	W	K	l [mm]	w [mm]	h [mm]			Light No.
LEDDL101-SP	4052899 595255	12	22/2	6000	85	57	121,5	1	8	15 ^{P.111}
LEDDL101-WD	4052899 595279	12	22/2	6000	85	57	121,5	1	8	15 ^{P.111}
LEDDL102-WD	4052899 595316	12/24	30/2	6000	140	69,2	67	1	8	16 ^{P.111}

Value series product range – OSRAM LED working lights



LEDDriving® CUBE
VX80-SP
(LEDWL101-SP)



LEDDriving® ROUND
VX70-SP
(LEDWL102-SP)



LEDDriving® CUBE
VX70-WD
(LEDWL103-WD)

Product Reference	Product Number	V	W	K	l [mm]	w [mm]	h [mm]			Light No.
LEDWL101-SP	4062172 141970	12/24	20	6000	80	70	85	2	16	18 ^{P.112}
LEDWL102-SP	4062172 150699	12/24	8	6000	75	30	93	2	16	19 ^{P.112}
LEDWL103-WD	4062172 142021	12/24	8	6000	73	31	97	2	16	20 ^{P.112}



OSRAM LEDriving® daytime running lights

Stylish highlights for state-of-the-art headlights

Innovative, easy-to-install lightguide and pixel solution with high-quality LED technology for low energy consumption and long lifetime: LEDriving® daytime running lights are the right choice for drivers who want to increase visibility during the day and with an eye for design.

Features of LG (LEDDRL102)

- Lightguide technology for homogeneous light distribution
- LED daytime running light including position light
- Color temperatures of up to 6,000 K
- Premium OSRAM quality
- OEM technology with long lifetime of up to 5,000 h and low energy consumption

Benefits of LG (LEDDRL102)

- Pixel-free brilliance and dynamic curves
- Dimmable light functions
- Perfect color match for existing HID and LED systems with cool white and stylish LED light
- 5-year guarantee¹⁾
- Simple installation and compatible with start-stop system and hybrid vehicles

Features of PX-5 (LEDDRL301 CL15)


- Faceted optic and dotted pixel technology
- LED daytime running light (ECE certified)
- Color temperatures of up to 5,200 K
- Premium OSRAM quality
- Long lifetime of up to 5,000 h with low energy consumption

Benefits of PX-5 (LEDDRL301 CL15)

- Dynamic appearance of the daytime running lights
- Legal LED upgrade by improving both visibility and style
- Perfect color match for existing HID and LED systems with cool white and stylish LED light
- 3-year guarantee¹⁾
- Simple installation



OSRAM LEDriving® daytime running light product range

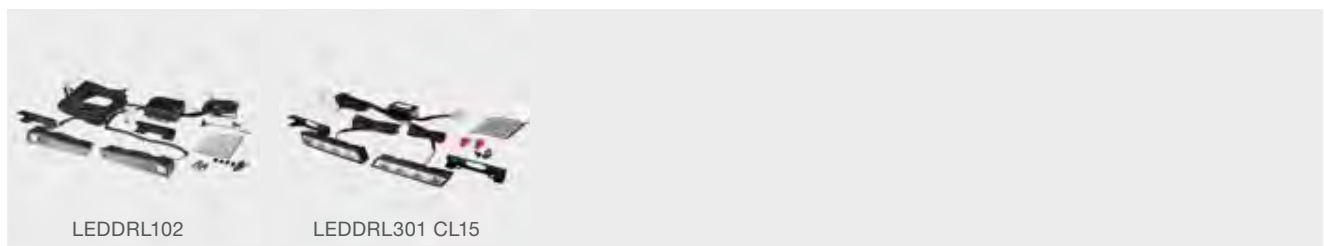

Product Reference	Product Number	V	W	K	$\overset{3)}{l}$ [mm]	$\overset{3)}{w}$ [mm]	$\overset{3)}{h}$ [mm]			 No.
LEDDRL102 ²⁾	4052899 200494	12	15	6000	167	42	32	1	4	1 ^{P.113}
LEDDRL301 CL15 ²⁾	4052899 170766	12	13.5	5200	160	30	23	1	5	2 ^{P.113}

1) Refer to www.osram.com/am-guarantee for precise conditions

2) Compatible with start-stop-system and hybrid vehicles

3) Product measurements



OSRAM LEDambient®

Stylish interior ambient lighting

The LEDambient® interior lights enable you to illuminate every single corner of your car. The high brightness of the products combined with the intense color temperatures puts your car into a new light. The LED strips are rapidly and easily mounted.

Features of LEDambient® TUNING LIGHTS¹⁾

- Flexible 16-color LED strips with adhesive backing
- Providing RGB styling to the interior of the vehicle
- 24-button wireless remote control
- OSRAM quality
- Adapter included for auto accessory plug-in

Benefits of LEDambient® TUNING LIGHTS¹⁾

- 4 flashing modes
- Dimmable
- Compact device for user-friendly operation
- 2-year guarantee²⁾
- Extension kit available

Features of LEDambient® INTERIOR STRIP KIT¹⁾


- High brightness thanks to 90 LEDs per 1.5 m strip
- White light with color temperature up to 4500 K
- Two flexible self-adhesive LED strips of 1.5 m
- OSRAM quality
- Two strips per packaging, individually shortenable after every 3rd LED

Benefits of LEDambient® INTERIOR STRIP KIT¹⁾

- Illuminate every corner of your car, commercial vehicle or caravan
- Interior lighting for the vehicle roof, loading area, trunk or other cabinet lighting application
- Easy to install with no soldering or use of screws
- 2-year guarantee²⁾
- Individual length adjustment for various application purposes




OSRAM LEDambient® TUNING LIGHTS product range

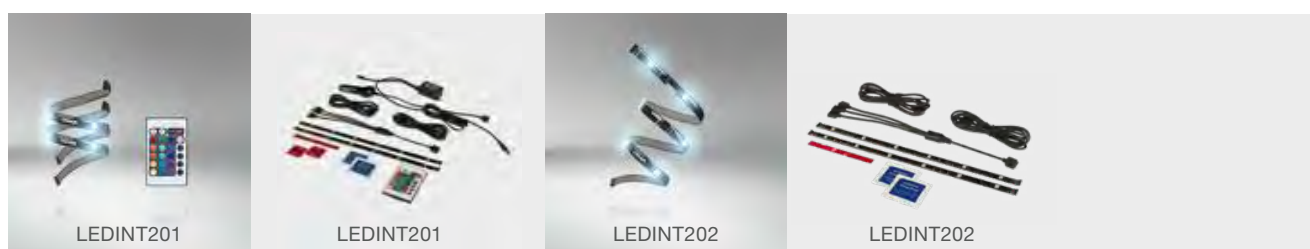

Product Reference	Product Number	V	COLOR	KIT			No.
LEDINT201	40528999 33576	12	Multicolor	Base Kit	1	2	-
LEDINT201-SEC	40528992 48809	12	Multicolor	Base Kit	1	2	-
LEDINT202 ³⁾	40528999 33590	12	Multicolor	Extension Kit	1	2	-

OSRAM LEDambient® INTERIOR STRIP KIT product range

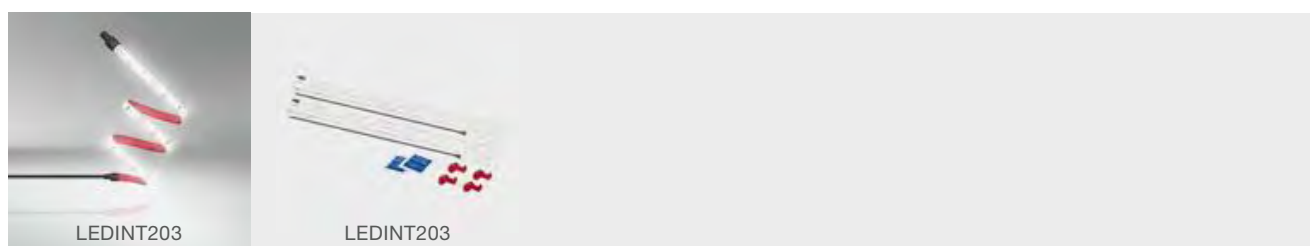

Product Reference	Product Number	V	COLOR	KIT			No.
LEDINT203	40528995 16670	12	White color	-	1	2	3 ^{P.113}

1) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.

2) Refer to www.osram.com/am-guarantee for precise conditions | 3) Only works in combination with the base kit



LED ACCESSORIES

LED inspection lights, reading lights for vehicle interior and safety lights are mobile helpers with strong lumen output. These highly practical, mobile, and energy-efficient light sources are based on LED technology, enhanced by handy, ergonomic – and even elegant – designs to improve the daily work and life.



OSRAM LEDinspect®

Essential to your garage

A full line of premium inspection lights, specially-developed for the complex maintenance and repairs you tackle every day, reinvents light, turning it into a functional tool for your garage. LEDinspect® enhances visibility with advanced LEDs that deliver exceptional luminosity. Each unique light design reflects an understanding of professional applications and supplies light precisely where you need it. Many lights include features, such as magnets, clips, hooks, torches, and extensions to direct light and give you hands-free options.



Features of

SLIMLINE 500 (LEDIL108)

- Luminance: 500 lm and 250 lm (2 lighting settings)
- Battery status display
- Magnetic with protection class: IP42, IK07
- Premium OSRAM quality with slim premium design (aluminium)
- Long lifetime thanks to powerful long-lasting LEDs

Benefits of

SLIMLINE 500 (LEDIL108)

- Excellent illumination for all types of professional inspection and maintenance
- Rechargeable 3.6 V 2,600 mAh Li-ion battery, charge via USB port & DC/AC (with charging cable)
- Flexible mounting possibilities as well as very dirt-resistant
- 3-year guarantee¹⁾
- More durability due to LED technology for a very long service life



Features of

POCKET 280 (LEDIL107)

- Luminance: 280 lm (high), 70 lm (low)
- Battery status display
- Magnetic with hook and protection class: IP20
- Premium OSRAM quality with compact and premium design (aluminium)
- Long lifetime thanks to powerful long-lasting LEDs

Benefits of

POCKET 280 (LEDIL107)

- Excellent illumination for all types of professional inspection and maintenance
- Rechargeable 3.7 V 2,000 mAh Li-Polymer battery, charge via USB port & DC/AC (with charging cable)
- Flexible mounting possibilities as well as very dirt-resistant
- 3-year guarantee¹⁾
- More durability due to LED technology for a very long service life



Features of

PENLIGHT 150 UV-A (LEDIL106)

- Luminance: 150 lm (high), UV light (low)
- Battery status display
- Magnetic with clip and protection class: IP20
- Premium OSRAM quality with compact design (aluminium)
- Long lifetime thanks to powerful long-lasting LEDs

Benefits of

PENLIGHT 150 UV-A (LEDIL106)

- Excellent illumination by identifying leaks in the air condition thanks to integrated UV light
- Rechargeable 800 mAh Li-Polymer battery, charge via USB port & DC/AC (with charging cable)
- Flexible mounting possibilities as well as very dirt-resistant
- 3-year guarantee¹⁾
- More durability due to LED technology for a very long service life



Features of

PENLIGHT 150 (LEDIL105)

- Luminance: 150 lm (high), 35 lm (low)
- Battery status display
- Magnetic with clip and protection class: IP20
- Premium OSRAM quality with compact design (aluminium)
- Long lifetime thanks to powerful long-lasting LEDs

Benefits of

PENLIGHT 150 (LEDIL105)

- Excellent illumination for all types of professional inspection and maintenance
- Rechargeable 800 mAh Li-Polymer battery, charge via USB port & DC/AC (with charging cable)
- Flexible mounting possibilities as well as very dirt-resistant
- 3-year guarantee¹⁾
- More durability due to LED technology for a very long service life



Features of

BONNET 1400 (LEDIL104)

- Luminance: 1400 lm
- Operable via 5 m cable and adjustable telescopic mounting bracket
- Protection class: IP65, IK06
- Premium OSRAM quality with ultra-slim design
- Long lifetime thanks to powerful long-lasting LEDs

Benefits of

BONNET 1400 (LEDIL104)

- Excellent illumination for all types of professional inspection and maintenance
- Flexible working for mounting under the hood of the vehicle or with integrated hook
- Easy-to-grip and dirt-resistant surface
- 3-year guarantee¹⁾
- More durability due to LED technology for a very long service life

¹⁾ Refer to www.osram.com/am-guarantee for precise conditions



Features of SLIMLINE 280 (LEDIL103)

- Luminance: 280 lm (high), 70 lm (low)
- Battery status display
- Protection class: IP42 / IK06
- Premium OSRAM quality with slim design
- Long lifetime thanks to powerful long-lasting LEDs

Benefits of SLIMLINE 280 (LEDIL103)

- Excellent illumination for all types of professional inspection and maintenance
- Rechargeable 2,000 mAh Li-ion battery, charge via USB port & DC/AC (with charging cable)
- Easy-to-grip and dirt-resistant surface
- 3-year guarantee¹⁾
- More durability due to LED technology for a very long service life



OSRAM LEDinspect® product range

Product Reference	Product Number	V	W	lm	lx	K	$\frac{l}{[mm]}$ ³⁾	$\frac{w}{[mm]}$ ³⁾	$\frac{h}{[mm]}$ ³⁾			 No.
LEDIL108	4052899559349	3.6	6	500/250	900/450 ²⁾	6000	346	44	24	1	4	9 ^{P.113}
LEDIL107	4052899963863	3.7	1	280/70	480/500 ²⁾	6000	133	64	17	1	4	8 ^{P.113}
LEDIL106	4052899963849	3.7	0.5	150/UVA	300 ²⁾	6000	177	23	14	1	4	7 ^{P.113}
LEDIL105	4052899963825	3.7	0.5	150/35	300/100 ²⁾	6000	177	23	14	1	4	6 ^{P.113}
LEDIL104	4052899970632	220	13-15	1.400	900 ²⁾	6000	1104	50	50	1	4	5 ^{P.113}
LEDIL103	4052899327351	3.4	3.5	280	500 ²⁾	6000	285	37	26	1	4	4 ^{P.113}

1) Refer to www.osram.com/am-guarantee for precise conditions

2) Up to

3) Product measurements

OSRAM LEDinspect®

Essential to your DIY toolbox

LEDinspect® simplifies DIY projects – specially-developed for maintaining and repairing vehicles, transforms light from an afterthought into a functional tool. The design of each lamp takes into account how the light is used and includes different extra features, such as magnets, clips, hooks, and rotatable heads, all housed in perfectly-sized packages and various light settings to ease work.



Features of FLOODER HELICOPTER (LEDIL HELI 1000)

- Luminance: 1,000 lm (high), 500 lm (low)
- 57 LEDs
- 10 Watt
- 6,000 K
- IP Protection Class IP44/IK06

Benefits of FLOODER HELICOPTER (LEDIL HELI 1000)

- Multifunctional working light in extraordinary design
- Tripod length to be extended to 1.75m
- Multidirectional head
- Rotatable hook on bottom side
- Charging via Micro-USB (cable included)



Features of FLOODER SPACESHIP (LEDIL SPACE 1000)

- Luminance: 1,000 lm (high), 500 lm (low)
- Side light: 500 lm (high), 250lm (low)
- 36 LEDs (main light), 2x12 LEDs (side light)
- 20 Watt
- 6,000 K

Benefits of FLOODER SPACESHIP (LEDIL SPACE 1000)

- Multidirectional lighting system
- Super flexible lighting system
- Use as floodlight, torch and spot-light
- Rotatable heads and adjustable light cone
- 2 removable side lights for various applications and individual allocation within the room and the working area



Features of FLOODER 10W (LEDIL FLOOD 10W)

- Luminance: 1,000 lm (high), 500 lm (low)
- 25 LEDs
- 10 Watt
- 6,000 K
- IP-Protection class: IP54, IK06

Benefits of FLOODER 10W (LEDIL FLOOD 10W)

- Small, compact and powerful floodlight
- Pleasantly look and feel, easy to grip and dirt-resistant surface
- Easy portability
- Ideal as a work lamp for handi-craft activities, car repair, renovation and painting work.
- Angle stand & magnets for hands free working and easy attachment



**Features of
FLOODER 20W (LEDIL FLOOD 20W)**

- Luminance: 2,000 lm (high), 1,000 lm (low)
- 44 LEDs
- 20 Watt
- 6,000 K
- IP-Protection class: IP54, IK06

**Benefits of
FLOODER 20W (LEDIL FLOOD 20W)**

- Small, compact and powerful floodlight
- Pleasantly look and feel, easy to grip and dirt-resistant surface
- Easy portability
- Ideal as a work lamp for handi-craft activities, car repair, renovation and painting work.
- Angle stand & magnets for hands free working and easy attachment



**Features of
PROFESSIONAL 180
(LEDIL PRO 180)**

- Luminance: 180 lm (high), 80 lm (low), 40 lm (torch)
- 16 LEDs (main light) 1 LED (torch)
- 6,000 K
- 3* AAA alkaline battery (included)
- IP-Protection class: IP44, IK06

**Benefits of
PROFESSIONAL 180
(LEDIL PRO 180)**

- Compact & flexible design with powerful lighting
- Pleasantly look and feel, easy to grip and dirt-resistant surface
- Ready to use immediately after purchase
- Provides optimal illumination for even the tightest of spaces and difficult-to-access areas
- Multi-positioning, magnet & hanging hook for hands free working



**Features of
MINI COMPACT 80
(LEDIL MN CP 80)**

- Luminance: 80 lm (high), 30 lm (low), 40 lm (torch)
- 10 LEDs (main light) 1 LED (torch)
- 6,000 K
- 3* AAA alkaline battery (included)
- IP-Protection class: IP44, IK06

**Benefits of
MINI COMPACT 80
(LEDIL MN CP 80)**

- Compact & flexible design with powerful lighting
- Pleasantly look and feel, easy to grip and dirt-resistant surface
- Ready for use immediately after purchase
- Provides optimal illumination for even the tightest of spaces and difficult-to-access areas
- Multi-positioning, magnet & hanging hook for hands free working



Features of HEADLAMP 300 (LEDIL209)

- Luminance: 300 lm (100%), 60 lm (20%)
- Protection class: IP64, IK07
- Works with three AA batteries (included)
- Headlamp with 75° angle adjustment
- Increased lifetime thanks to long-lasting LEDs

Benefits of HEADLAMP 300 (LEDIL209)

- Multifunctional headlamp with zooming effect, flashing option and red warning light for higher visibility on the back
- Easy-to-grip and dirt-resistant surface
- Immediate usage after purchase for hand-free working thanks to head fixing (size adjustable)
- 2-year guarantee¹⁾
- More durability due to LED technology for a long service life



Features of PROFESSIONAL 150 (LEDIL207)

- Luminance: 150 lm (high), 70 lm (low)
- Magnetic with clip, rotatable hook and protection class: IP44, IK06
- Rechargeable 3.7 V 2,000mAh Li-ion battery
- OSRAM quality in handy and compact design with multifunctional features
- Increased lifetime thanks to long-lasting LEDs

Benefits of PROFESSIONAL 150 (LEDIL207)

- Ideal illumination for all types of inspection and maintenance
- Flexible mounting possibilities as well as dirt-resistant
- Easy charge via USB port & DC/AC (with charging cable)
- 2-year guarantee¹⁾
- More durability due to LED technology for a long service life



Features of SLIMLINE 250 (LEDIL206)

- Luminance: 250 lm (high), 30 lm (low)
- Magnetic with protection class: IP44, IP07
- Rechargeable 3.7 V 2,600mAh Li-ion battery
- OSRAM quality in light slim design
- Increased lifetime thanks to long-lasting LEDs

Benefits of SLIMLINE 250 (LEDIL206)

- Ideal illumination for all types of inspection and maintenance
- Flexible mounting possibilities as well as dirt-resistant
- Easy charge via USB port & DC/AC (with charging cable)
- 2-year guarantee¹⁾
- More durability due to LED technology for a long service life

¹⁾ Refer to www.osram.com/am-guarantee for precise conditions



Features of FLASHLIGHT 15 (LEDIL205)

- Luminance: 15 lm
- Protection class: IK07
- Rechargeable 3.6 V 80 mAh Ni-Mh
- OSRAM quality in small and compact design (pink & black available)
- Increased lifetime thanks to long-lasting LEDs

Benefits of FLASHLIGHT 15 (LEDIL205)

- Ideal illumination for all types of inspection and maintenance
- Easy-to-grip and dirt-resistant surface
- Easy charge via 12 V cigarette lighter
- 2-year guarantee¹⁾
- More durability due to LED technology for a long service life



Features of POCKET 160 (LEDIL204)

- Luminance: 160 lm (high), 75 lm (low)
- Magnetic with hook, clip and protection class: IP44, IK07
- Rechargeable 3.7 V 1,500 mAh Li-ion battery
- OSRAM quality in small and compact design with multifunctional features
- Increased lifetime thanks to long-lasting LEDs

Benefits of POCKET 160 (LEDIL204)

- Ideal illumination for all types of inspection and maintenance
- Flexible mounting possibilities as well as dirt-resistant
- Easy charge via USB port & DC/AC (with charging cable)
- 2-year guarantee¹⁾
- More durability due to LED technology for a long service life



Features of PENLIGHT 80 (LEDIL203)

- Luminance: 80 lm (high)
- Magnetic with clip and protection class: IP20, IK06
- Works with three AAA batteries (included)
- OSRAM quality in small and compact design with multifunctional features
- Increased lifetime thanks to long-lasting LEDs

Benefits of PENLIGHT 80 (LEDIL203)

- Ideal illumination for all types of inspection and maintenance
- Flexible mounting possibilities as well as dirt-resistant
- Immediate usage after purchase
- 2-year guarantee¹⁾
- More durability due to LED technology for a long service life

¹⁾ Refer to www.osram.com/am-guarantee for precise conditions



Features of MINI 125 (LEDIL202)

- Luminance: 125 lm (high), 90 lm (low)
- Magnetic with hook and protection class: IP44, IK07
- Works with three AAA batteries (included)
- OSRAM quality in small and compact design with multifunctional features
- Increased lifetime thanks to long-lasting LEDs

Benefits of MINI 125 (LEDIL202)

- Ideal illumination for all types of inspection and maintenance
- Flexible mounting possibilities as well as dirt-resistant
- Immediate usage after purchase
- 2-year guarantee¹⁾
- More durability due to LED technology for a long service life



Features of FOLDABLE 80 (LEDIL201)

- Luminance: 80 lm (high), 25 lm (low)
- Magnetic with hook and protection class: IP44, IK07
- Battery status display
- OSRAM quality with compact and foldable design
- Increased lifetime thanks to long-lasting LEDs

Benefits of FOLDABLE 80 (LEDIL201)

- Ideal illumination for all types of inspection and maintenance
- Flexible mounting possibilities as well as dirt-resistant
- Rechargeable Ni-Mh 3.6 V 1600 mAh battery (charging via 220 V adapter and 12 V cigarette lighter)
- 2-year guarantee¹⁾
- More durability due to LED technology for a long service life

OSRAM LEDinspect® product range

Product Reference	Product Number	V	W	lm	lx	K	$\frac{l}{[mm]}$ ⁴⁾	$\frac{w}{[mm]}$ ⁴⁾	$\frac{h}{[mm]}$ ⁴⁾			
LEDIL HELI 1000	4062172092241	3.7	10	1000/500	-	6000	392	136	136	1	4	18 ^{P.114}
LEDIL SPACE 1000	4062172092289	3.7	20	1000/500	-	6000	290	190	262	1	4	19 ^{P.114}
LEDIL FLOOD 10W	4062172092326	3.7	10	1000	-	6000	176	59	161	1	6	20 ^{P.114}
LEDIL FLOOD 20W	4062172092364	3.7	20	2000	-	6000	204	69	179	1	6	21 ^{P.114}
LEDIL PRO 180	4062172092302	4.5	12	180/40	-	6000	65	40	228	1	10	22 ^{P.114}
LEDIL MN CP 80	4062172092265	4.5	-	80/40	-	6000	66	31	129	1	10	23 ^{P.114}
LEDIL209	4052899425033	4.5	3	300/60	272/43 ²⁾	7000	90	89	68	1	4	17 ^{P.113}
LEDIL207	4052899425019	3.7	3	150/70	58/217 ²⁾	7000	210	52	40	1	4	16 ^{P.113}
LEDIL206	4052899424999	3.7	3	250/30	96/20 ²⁾	7000	320	39	25	1	4	15 ^{P.113}
LEDIL205-BKPK ³⁾	4052899540477	3.6	0.5	15	56 ²⁾	7000	61	22.5	-	-	4	14 ^{P.113}
LEDIL205-PK	4052899539006	3.6	0.5	15	56 ²⁾	7000	61	22.5	-	1	10	14 ^{P.113}
LEDIL205	4052899424951	3.6	0.5	15	56 ²⁾	7000	61	22.5	-	1	10	14 ^{P.113}
LEDIL204	4052899424975	3.7	0.5	160/75	70/30 ²⁾	7000	127	63	34	1	4	13 ^{P.113}
LEDIL203	4052899275607	4.5	1.5	80	250 ²⁾	7000	160	16	32	1	12	12 ^{P.113}
LEDIL202	4052899009578	4.5	1.6	125/90	1200 ²⁾	6000	98	63	35	1	24	11 ^{P.113}
LEDIL201	4052899009592	4.5	1.5	80/25	2000 ²⁾	6000	220	46	51	1	10	10 ^{P.113}

1) Refer to www.osram.com/am-guarantee for precise conditions | 2) Up to | 3) Pink & black assortment | 4) Product measurements

OSRAM LEDguardian® warning lights

Prepared for serious situations

Two lights that should accompany every situation. ROAD FLARE is a powerful emergency flare, for signaling serious situations and improving visibility. SAVER LIGHT is a multifunctional torch that includes a seat-belt cutter, life hammer and flashing LED warning lights.



Features of LEDguardian® ROAD FLARE¹⁾

- Multifunctional LED warning light with rotating amber light (two modes flashing & continuous-on) and white torch light
- Magnetic with protection class: IP20
- Works with three AAA batteries (included)
- OSRAM quality
- Increased lifetime thanks to long-lasting LEDs

Benefits of LEDguardian® ROAD FLARE¹⁾

- See and be seen in emergency situations with up to 240 m distance
- Flexible mounting on various surfaces and crush-proof – doesn't break even when run over by a car³⁾
- Immediate usage after purchase
- 2-year guarantee²⁾
- More durability due to LED technology for a long service life



Features of LEDguardian® SAVER LIGHT PLUS¹⁾

- Multifunctional LED warning light with two light functions (amber flashing and white torch light)
- Emergency light with seat-belt cutter and emergency hammer
- Magnetic with holder and protection class: IP44, IK07
- OSRAM quality
- Increased lifetime thanks to long-lasting LEDs
- Works with two AA batteries (included)

Benefits of LEDguardian® SAVER LIGHT PLUS¹⁾

- Be prepared for serious situations, thanks to high quality, long lasting LEDs
- Getting out by smashing the window or cutting the seat-belt
- Flexible mounting possibilities as well as dirt-resistant
- 2-year guarantee²⁾
- More durability due to LED technology for a long service life



OSRAM LEDguardian® ROAD FLARE

Product Reference	Product Number	V	W	COLOR	l ⁴⁾ [mm]	w ⁴⁾ [mm]	h ⁴⁾ [mm]			No.
LED302	4052899184053	4.5	0.5	Amber/White	110	42	-	1	24	24 ^{P.114}

OSRAM LEDguardian® SAVER LIGHT PLUS

Product Reference	Product Number	V	W	COLOR	l ⁴⁾ [mm]	w ⁴⁾ [mm]	h ⁴⁾ [mm]			No.
LED101	4052899132344	3	1.7	Amber/White	180	63	53	1	6	25 ^{P.114}

1) Not approved as warning light according to German Road Traffic Licensing Regulations (StVZO). Not for sale in Germany.

2) Refer to www.osram.com/am-guarantee for precise conditions

3) Tested in a mid-range car at walking pace

4) Product measurements

OSRAM ONYX COPILOT®

Good light for a good ride

OSRAM ONYX COPILOT® is a flexible LED reading light that emits a pleasantly warm, glare-free light. With an appealing black design, the ONYX COPILOT® is available in three versions: ONYX-USB with USB plug in, ONYX M+7 is powered via cigarette lighter, ONYX L+7 comes with a plastic base for fixed connection.




Features

- Bright LED reading light for vehicle interior, 12 V & 24 V compatible
- Individual adjustment thanks to bendable neck
- Different plug-in ports (cigarette lighter, USB port, fix mounting) available
- Service life (LED): up to 20,000 h
- High protection class


Benefits

- Pleasant warm and glare-free LED light
- Light can be switched on/off and remain connected permanently
- Provides simple installation
- 2-year guarantee¹⁾
- Pleasantly look and feel, easy to grip and dirt-resistant surface

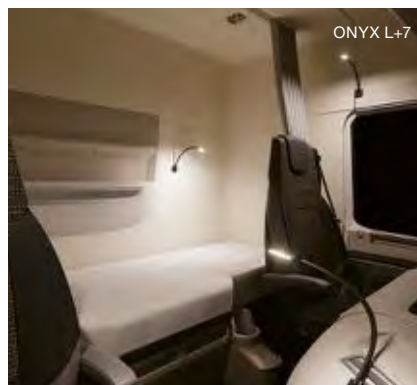



OSRAM LED ONYX COPILOT® product range



Product Reference	Product Number	V	W	lx	K	$\frac{l}{[mm]}$ ³⁾	$\frac{w}{[mm]}$ ³⁾	$\frac{h}{[mm]}$ ³⁾			
ONYX-USB	4052899 601000	12/24	0.5	20	3000	370 ²⁾	25	9	1	4	26 ^{P.114}
ONYX M+7	4052899 077270	12/24	0.5	20	3200	370 ²⁾	25	9	1	4	27 ^{P.114}
ONYX L+7	4052899 414938	12/24	0.5	20	3200	370 ²⁾	25	9	1	4	28 ^{P.114}

1) Refer to www.osram.com/am-guarantee for precise conditions

2) Not overall length of product

3) Product measurements



Tools for all requirements – practical support in everyday life

As part of its holistic approach to products and marketing, OSRAM provides a large number of sets and tools to ensure the best possible support on the road and an attractive product presentation. Spare lamp kits make lamp replacement on the way possible. For retail outlets, filling stations and workshops practical lamp depots are available. High-quality displays and demonstration tools present and demonstrate products in a clear way, and with clear information. Your requirements are as unique as our OSRAM solutions.

OSRAM workshop helpers

Practical at work and for the POS

The easy-to-use Shelf Rack provides space for the most important passenger car or truck lamps from OSRAM. The robust assortment box allows quick, mobile access to the most frequently required MINIWATT® lamps for passenger cars. Last but not least, the Automotive Lamp Cabinet offers clear and easy access to the OSRAM 12 volt or 24 volt product range.



Main benefits of Automotive Lamp Cabinet

- Clear lamp arrangement
- Slot system for easy removal
- Drawers for additional lamps
- Lamp tester optionally available
- Available with or without lock


Main benefits of Shelf Rack

- Row of hooks for presenting blister packs, DUO BOXES, new products
- Ideal for workshops and filling stations, practical for everyday use
- High-quality material and eye-catching design, ideal OSRAM in-store placement

Main benefits of MINIWATT® 12 V assortment box

- 18 different MINIWATT® 12 V lamps for passenger cars (total of 180 lamps), highlighted in color
- Equipment overview with the most important technical data directly in the box

OSRAM Automotive Lamp Cabinet | OSRAM Shelf Rack | OSRAM MINIWATT® 12 V

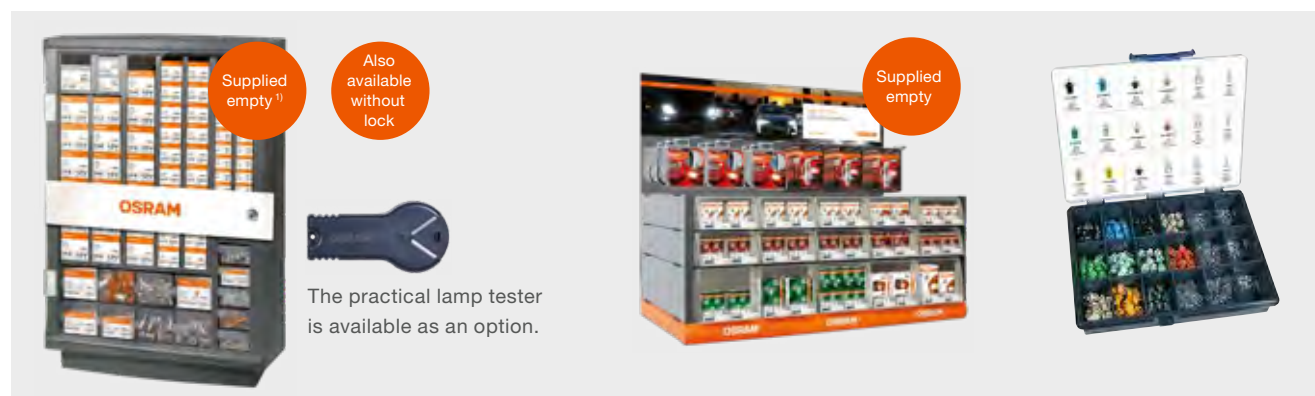

Product Reference	Product Number	Dimensions (W x H x D)	Contents	
ALC without ¹⁾	4008321694355	405 x 572 x 190 mm		
ALC with lock ¹⁾	4008321694362	405 x 572 x 190 mm		
Lamp tester 50X1	4008321786951	-		
SHELF RACK	4008321211248	920 x 900 x 580 mm		
509961	4008321082169	240 x 43 x 190 mm	180 lamps	3

¹⁾ We are happy to provide you with a proposal of stock. Please contact your local representative.

OSRAM Automotive demo tools

Boost your customer's sales experience


Various types of OSRAM Automotive demo tools provide customers with opportunities to experience the wide range of product technologies at the point of sale. These tools not only portray all USPs but also allow your customer to test and compare different technologies, find the right product more easily and thus increase your sale.



Main benefits of OSRAM demo tools

- Demonstrates multiple technologies
- Enables direct product comparison
- Test-me feature
- Real-life experience
- Easy to handle

Demonstration tools

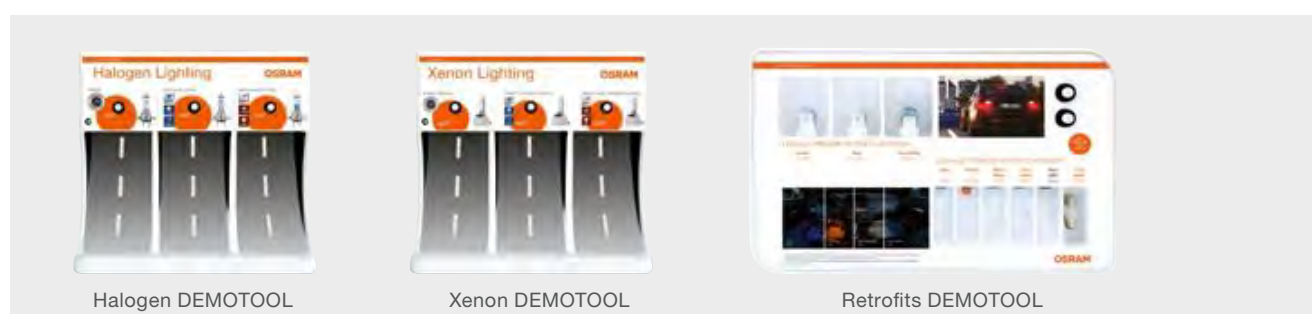

Product Reference	Product Number	Dimensions (WxHxD)
Halogen DEMOTOOL	4052899 323070	345 x 325 x 270 mm
Xenon DEMOTOOL	4052899 323063	345 x 325 x 270 mm
Retrofit DEMOTOOL	4052899 579712	365 x 225 x 75 mm

OSRAM polePOStion® & displays

Convincing product presentation

Attract customer attention with OSRAM's eye-catching instore solutions portfolio. From secondary placements up to a brand new shelf system, OSRAM's range of assortments stands out and shows all products at a glance. With the perfect tool for every type of merchandising solution you may need, OSRAM is your ideal partner.

Main benefits of OSRAM Automotive polePOStion®

- Ideal and innovative construction mirroring the OSRAM portfolio segmentation
- Flexible, modern design for easy adaptation
- High-quality and extremely convenient presentation system
- Variable construction according to every store's requirements


Main benefits of OSRAM displays

- Perfect product presentation
- Compact and eye-catching design
- High-quality and practical construction

























Please contact your responsible account manager if you are interested in our OSRAM Automotive polePOStion® and the new display designs. All order numbers of the individual elements can be found in the table above.


Automotive polePOStion® and Presentation Tools

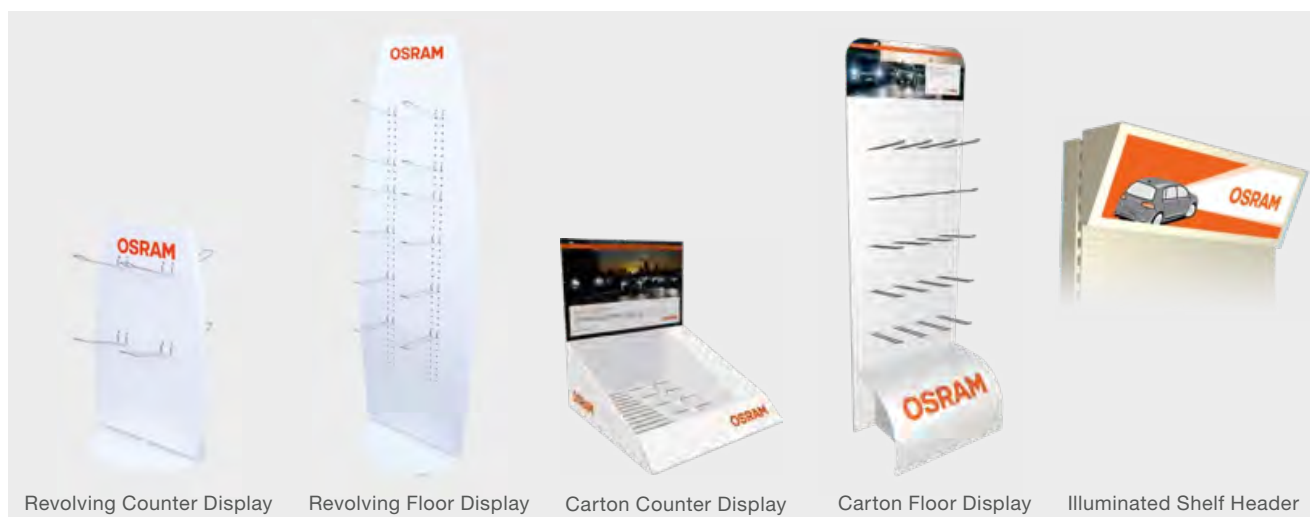



Product Reference	Product Number	Dimensions (W x H x D)	Content
Revolving Counter Display	4052899 545663	510 x 308 x 285 mm	-
Revolving Floor Display	4052899 545717	1540 x 455 x 385 mm	-
Carton Counter Display	4052899 452831	145 x 295 x 295 mm	-
Carton Floor Display	4052899 506053	1600 x 590 x 450 mm	-
Illuminated Shelf Header 1000 mm	4062172 168458	1015 x 330 x 190 mm	-
Illuminated Shelf Header 1250 mm	4062172 168465	1275 x 330 x 190 mm	-

 64150DWP (H1)	 9726CW (H4)	 64210DWNB (H7)			
1	2	3			
 67210CW (H7)	 67211CW (H11)	 9736CW (HB4)			
4	5	6			
 9745CW (H10)	 67219CW (H8/H11/H16)	 PG20-7 (PSX24W)	 6438DWP (C5W)	 6418DWP (C5W)	 6413DWP (C5W)
7	8	9	10	11	12
 828DWP (P13W)	 5201DWP (PS19W)	 7506D...P (P21W)	 7528D...P (P21/5W)	 7507DYP (PY21W)	 3157D...P (P27/7W)
13	14	15	16	17	18
 2825D...P / 2827DYP (W5W/ WY5W)	 921D...P (W16W)	 7505D...P (W21W)	 7515D...P (W21/5W)	 7504DYP (WY21W)	 3893DWP (T4W)
19	20	21	22	23	24




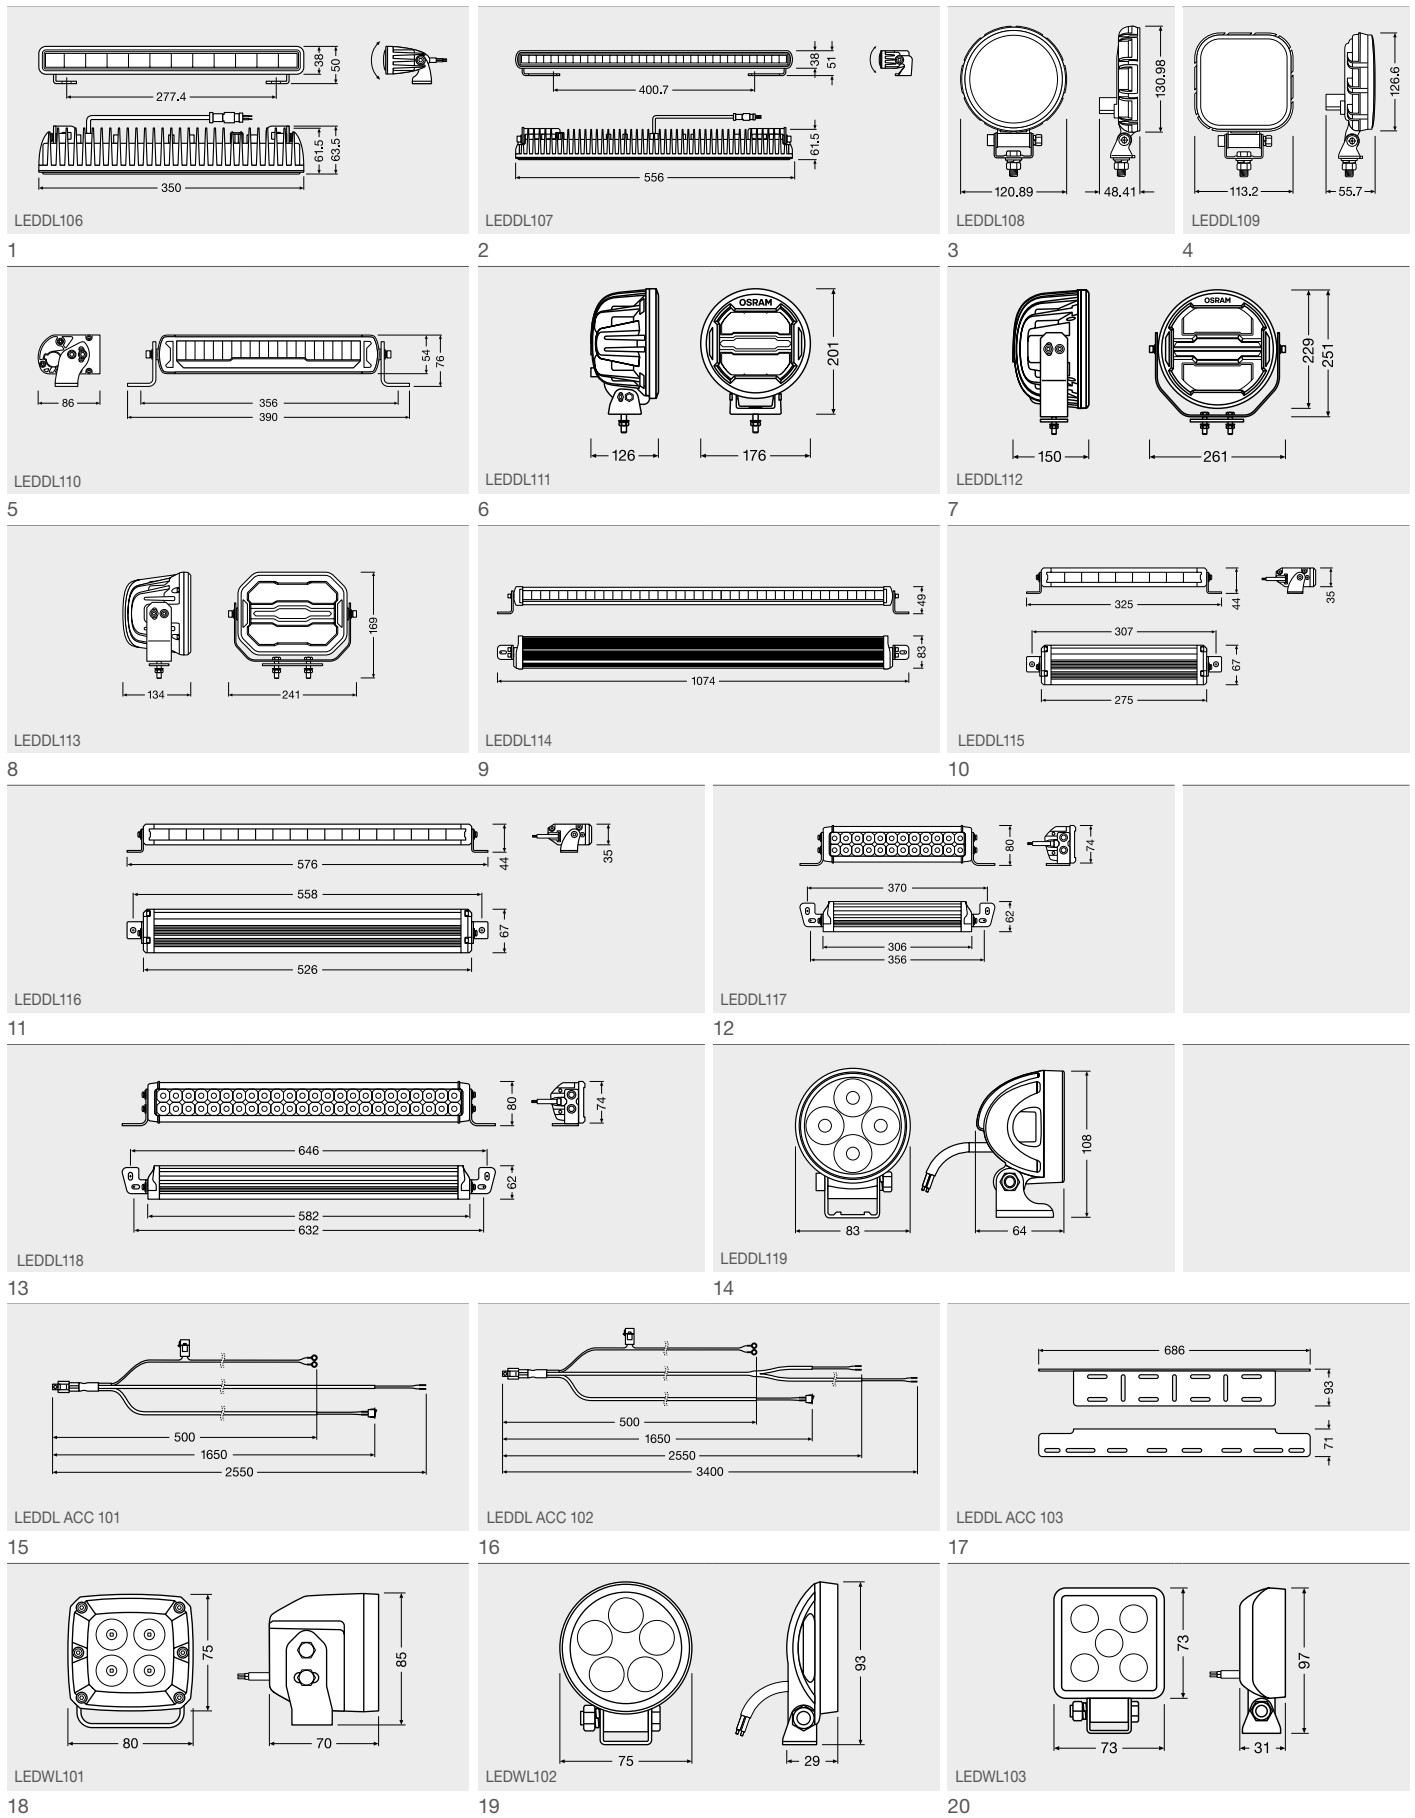

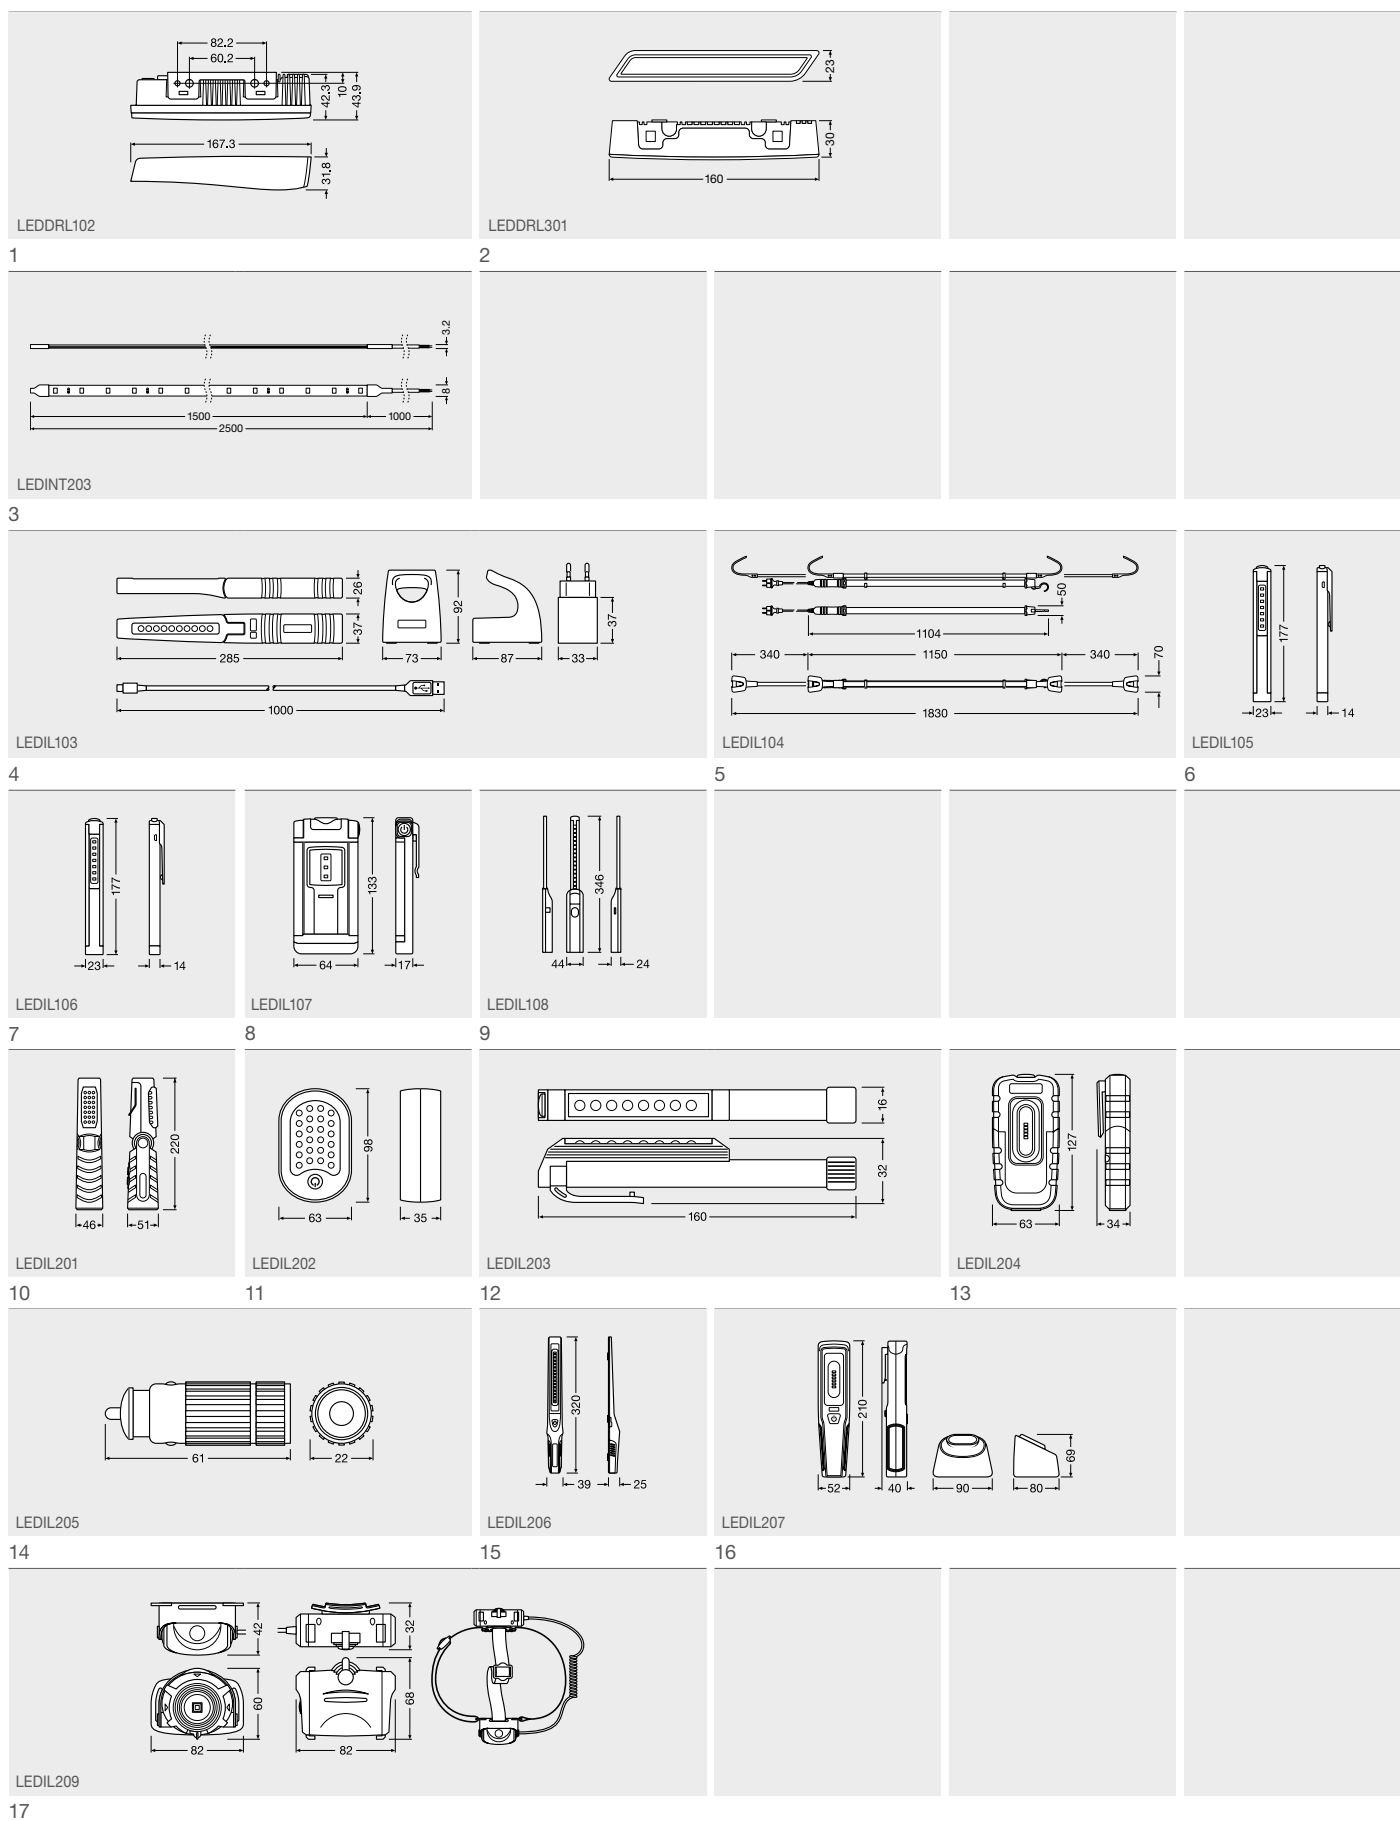





18

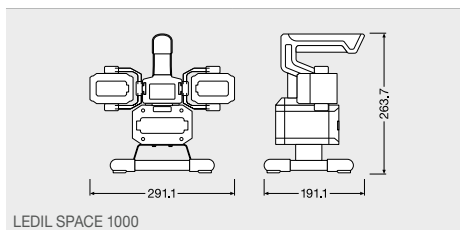


19

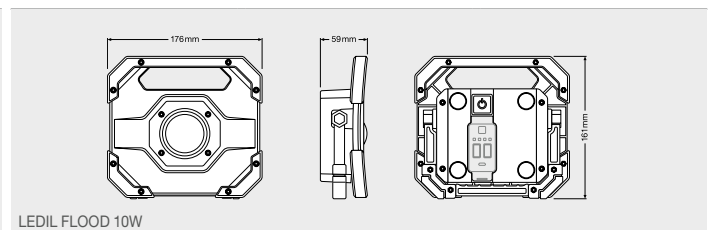


20

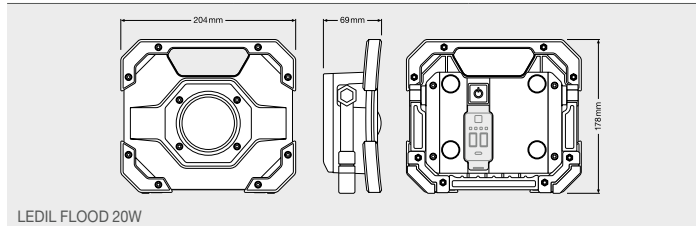


21




22




23




24




25

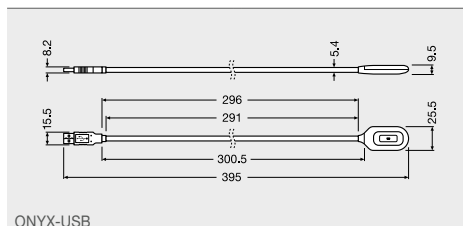


26

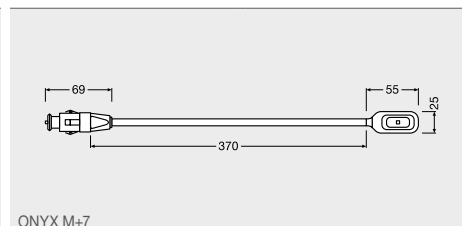


































27

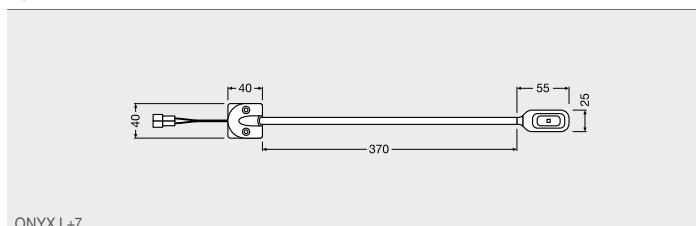


28

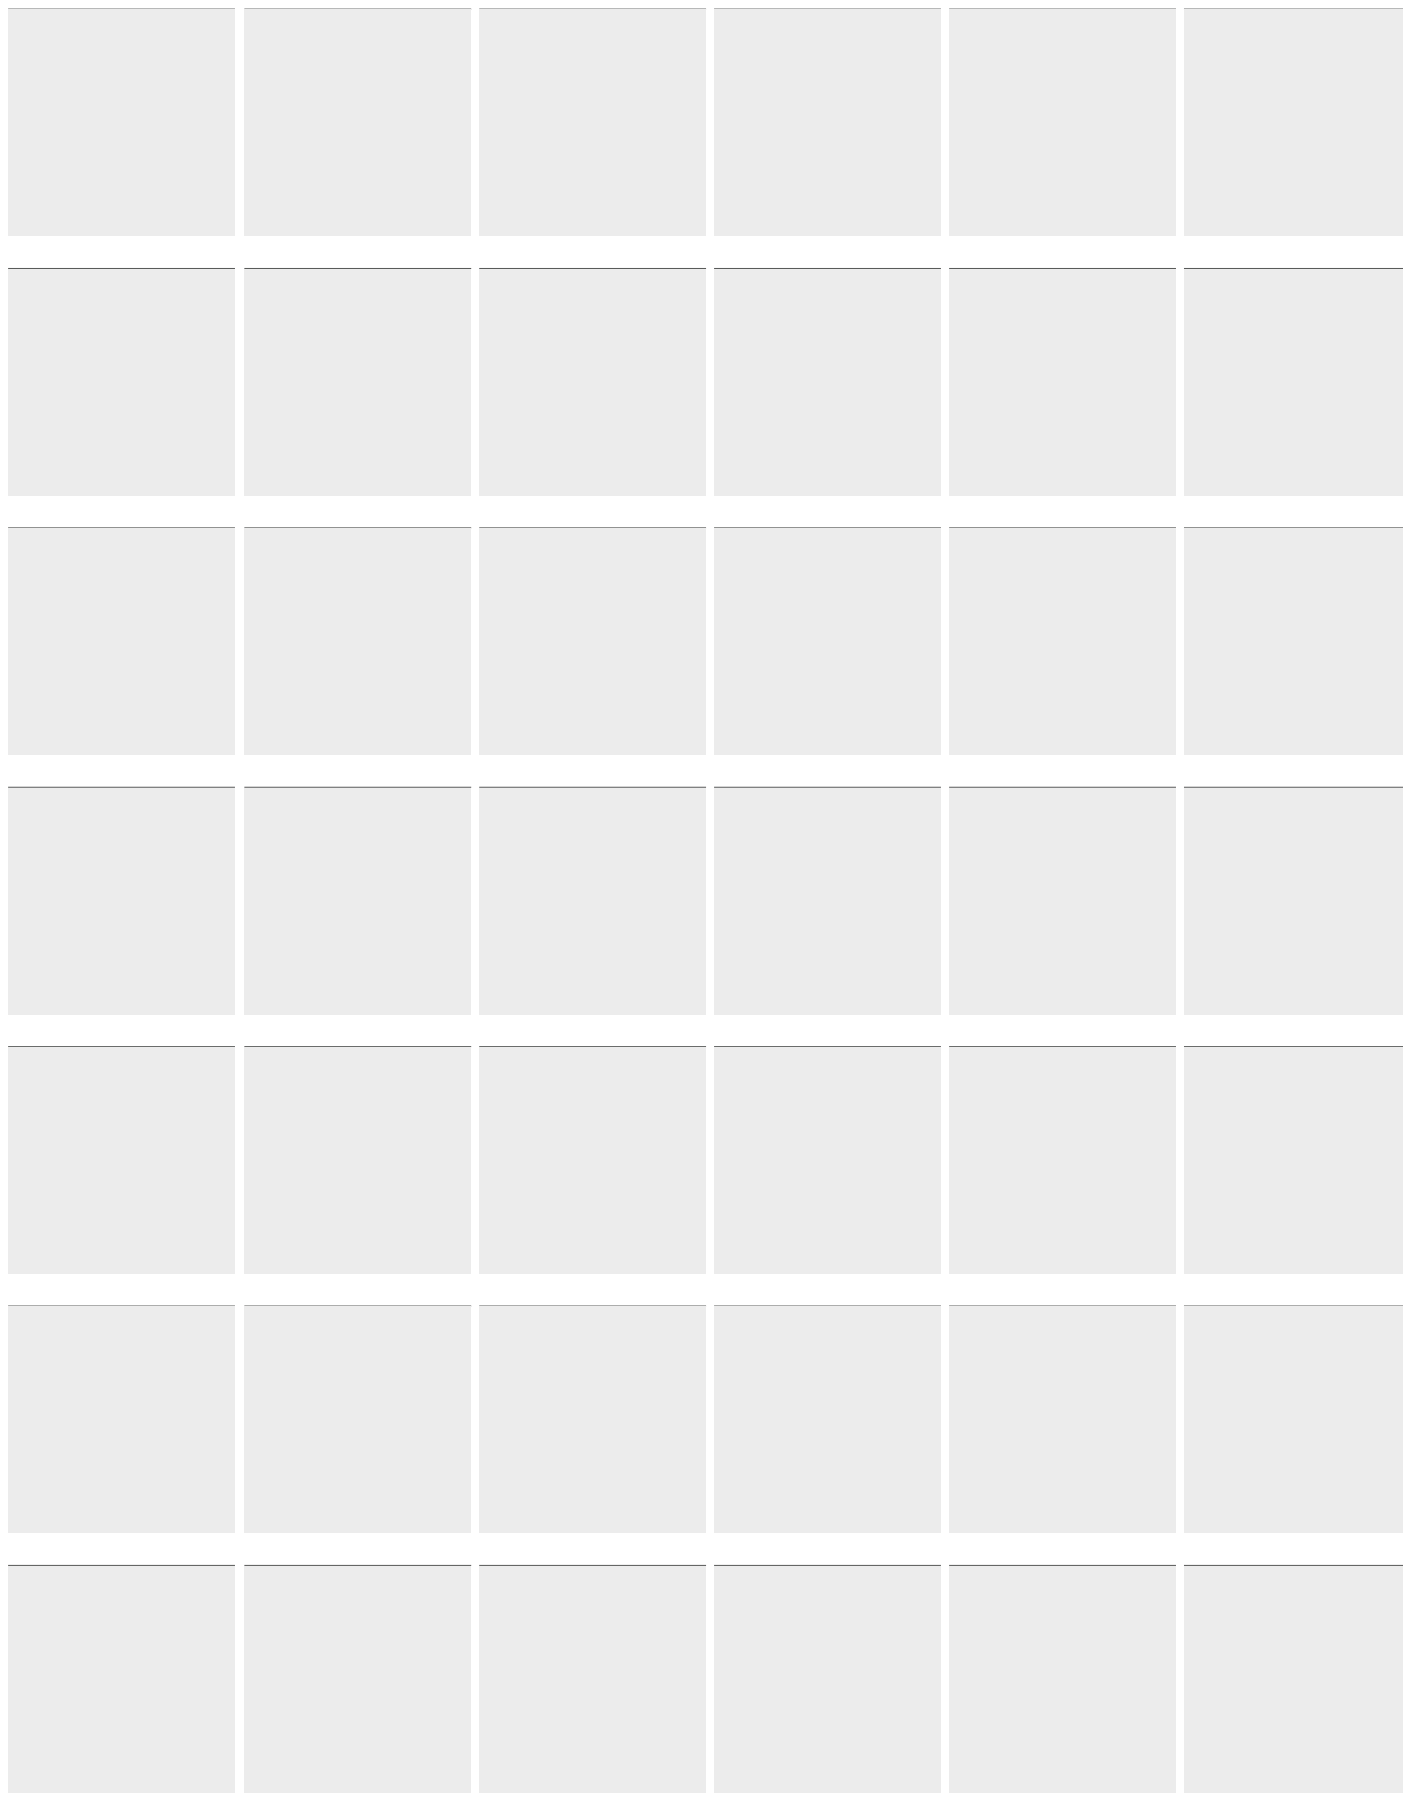


D1S, D3S, D8S	D1R, D3R	D2S, D4S	D2R, D4R	H1	H2
1	2	3	4	5	6
H3	H4	H7	H8	H8B	H9
7	8	9	10	11	12
H9B	H10	H11	H11B	H13	H15
13	14	15	16	17	18
H16	H18	H19	HB2	HB3	HB3A
19	20	21	22	23	24
HB4	HB4A	HB5	HIR1	HIR2	HS1
25	26	27	28	29	30
R2	H27W/1, H27W/2	S1, S2	H21W	HY21W	C5W
31	32	33	34	35	36
H6W	P21W, PY21W, 7529	P21/4W, P21/5W, 7240	P27W	P27/7W	PY27/7W
37	38	39	40	41	42

 PR21W 43	 PR21/5W 44	 PS19W 45	 PS24W 46	 PSX24W 47	 R5W, R10W, RY10W 48
 T4W, 3860 49	 W2.3W 50	 W3W, 2820 51	 W5W, WY5W, 2886X 52	 W16W 53	 WY16W 54
 W21W, WY21W 55	 W21/5W 56	 2341 57	 2721, 2722, 2741 58	 2840 59	 3796 60
 6411, 6413, 6421, 6424, 6429 61	 6428, 6430 62	 6438 63	 6461 64	 64111, 64113, 64115 65	 2351MFX6 66
 2352MFX6 67	 2452MFX6 68	 2473MFX6 69	 2721MF 70	 2721MFX 71	 2722MF 72
 2722MFX 73	 2741MF, 2741MFX 74	 828, 6851 75			



SV7-8
IEC 7004-80

Lampholder standard:
IEC 7005-80



SV8.5-8
IEC 7004-81

IEC 7005-80



W2x4.6d
IEC 7004-94

IEC 7005-94



W2.1x9.5d
IEC 7004-91

IEC 7005-91




W2.5x16d
IEC 7004-104

IEC 7005-104



W2.5x16q
IEC 7004-104

IEC 7005-104




BA9s
IEC 7004-14

Lampholder standard:
IEC 7005-12



BAY9s
BAW9s
IEC 7004-9

IEC 7005-9



BAX9s
IEC 7004-8

IEC 7005-8




BX8.4d

IEC 7005-140




B8.5d



BA15s
IEC 7004-11A

IEC 7005-13



BA15d
IEC 7004-11A

IEC 7005-13



BAU15s
IEC 7004-19

Lampholder standard:
IEC 7005-13



BAW15s
IEC 7004-11 E

IEC 7005-13



BAY15d
IEC 7004-11 B

IEC 7005-13




BAZ15d
IEC 7004-11 C

IEC 7005-13




BAW15d
IEC 7004-11 E

IEC 7005-13




BA20d
IEC 7004-12

IEC 7005-14



P14.5s
IEC 7004-46

Lampholder standard:
IEC 7005-46



PX14.5s




PX26d
IEC 7004-5

IEC 7005-5




PGJY19-2
PGJY19-5
PGJY19-1

IEC 7004-146
IEC 7005-146







P26.4t

IEC 7005-128



PGJ23t-1

IEC 7004-155
IEC 7005-155

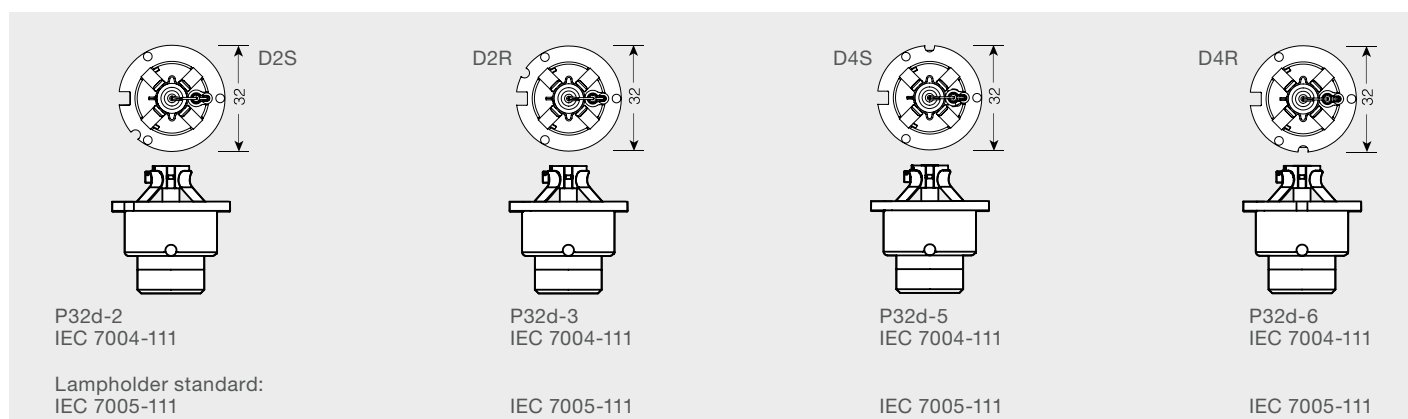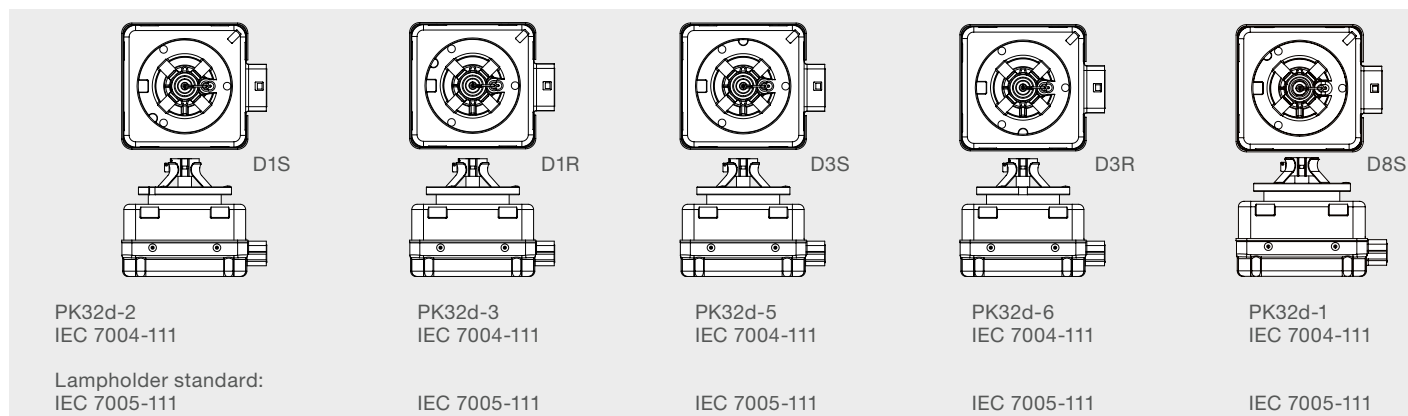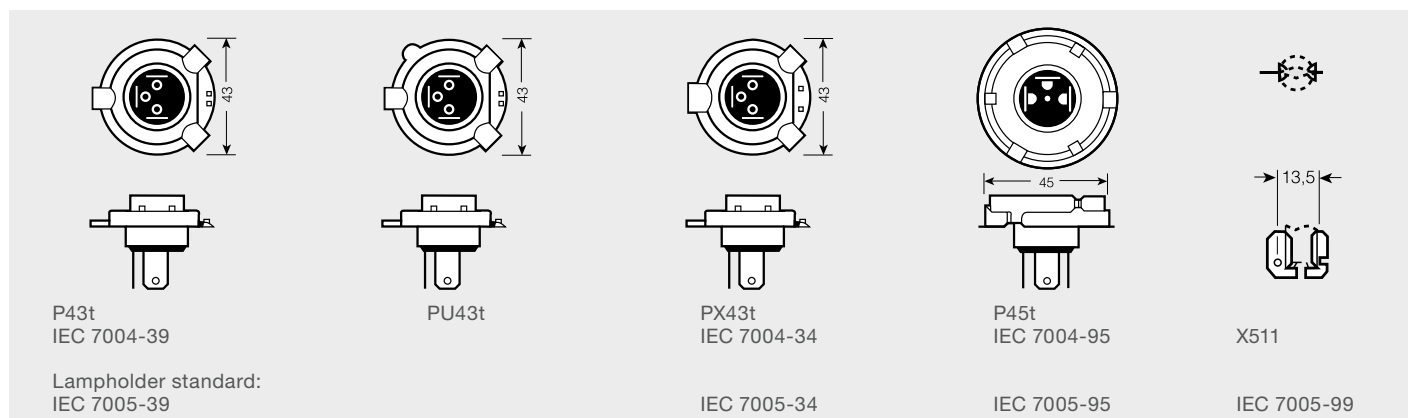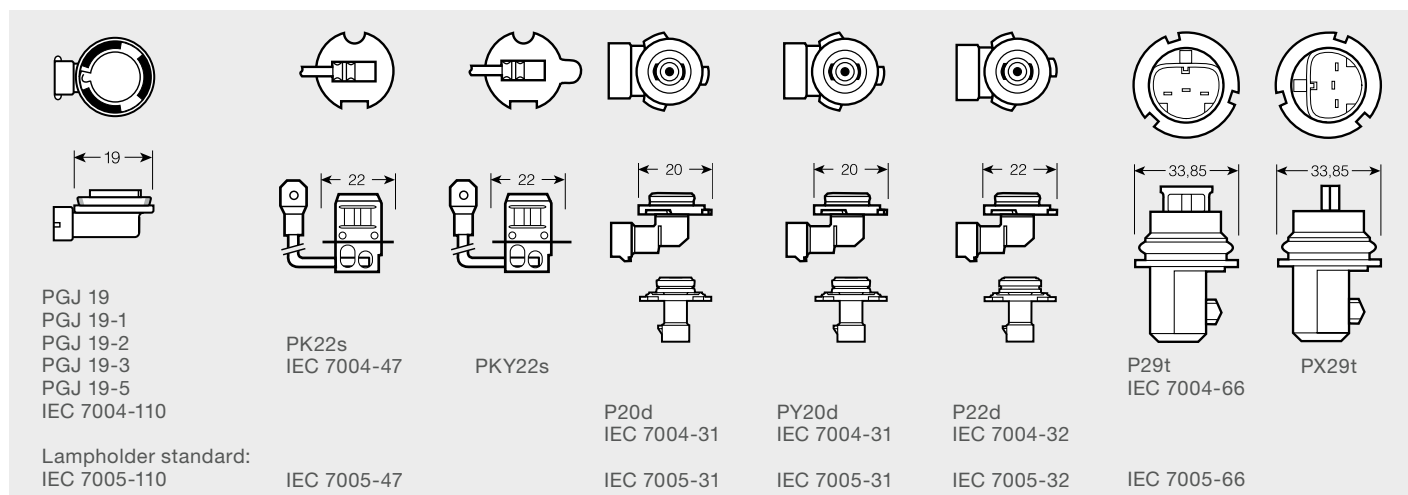

Type overview by ECE/SAE category

ECE	V	W		Product Reference	
-	12	5	-	LEDCBCTRL101	P.32
-	12	21	-	LEDCBCTRL102	P.32
-	12	50	-	LEDCBCTRL103	P.32
-	12	-	-	LEDDL ACC 101	P.84
-	12	-	-	LEDDL ACC 102	P.84
-	12	-	-	LEDDL ACC 103	P.84
-	12	22/2	-	LEDDL101-SP	P.86
-	12	22/2	-	LEDDL101-WD	P.86
-	12/24	30/2	-	LEDDL102-SP	P.84
-	12/24	30/2	-	LEDDL102-WD	P.86
-	12/24	35	-	LEDDL103-SP	P.82
-	12/24	35	-	LEDDL103-CB	P.82
-	12/24	36	-	LEDDL104-SP	P.82
-	12/24	68	-	LEDDL104-CB	P.82
-	12/24	68	-	LEDDL104-CB SM	P.82
-	12/24	14	-	LEDDL105-SP	P.82
-	12/24	29	-	LEDDL106-SP	P.82
-	12/24	29	-	LEDDL106-CB	P.82
-	12/24	46	-	LEDDL107-SP	P.82
-	12/24	44	-	LEDDL107-CB	P.82
-	12/24	15	-	LEDDL108-WD	P.85
-	12/24	15	-	LEDDL109-WD	P.85
-	12/24	45/1	-	LEDDL110-CB	P.84
-	12/24	39/1	-	LEDDL111-CB	P.84
-	12/24	60/2.5	-	LEDDL112-CB	P.84
-	12/24	70/1.5	-	LEDDL113-CB	P.84
-	12/24	140	-	LEDDL114-CB SM	P.82
-	12/24	27	-	LEDDL115-SP	P.85
-	12/24	63	-	LEDDL116-SP	P.85
-	12/24	30	-	LEDDL117-CB	P.85
-	12/24	55	-	LEDDL118-CB	P.85
-	12/24	22	-	LEDDL119-WD	P.85
-	12/24	20	-	LEDWL101-SP	P.86
-	12/24	8	-	LEDWL102-SP	P.86
-	12/24	8	-	LEDWL103-WD	P.86
-	12	2.4	-	LEDDMI 5G0 WT S	P.76
-	12	2.4	-	LEDDMI 5G0 BK S	P.76
-	12	5.9	-	LEDDMI 5K0 WT S	P.76
-	12	5.9	-	LEDDMI 5K0 BK S	P.76
-	12	2.4	-	LEDDMI 3G0 WT S	P.76
-	12	4.56	-	LEDDMI F20 WT S	P.78
-	12	4.56	-	LEDDMI F20 BK S	P.78
-	12	2.4	-	LEDDMI 5F0 WT S	P.78
-	12	2.4	-	LEDDMI 5F0 BK S	P.78
-	12	2.4	-	LEDDMI 8W0 WT S	P.79
-	12	2.4	-	LEDDMI 8W0 BK S	P.79
-	12	2.4	-	LEDDMI 8V0 WT S	P.79
-	12	2.4	-	LEDDMI 8V0 BK S	P.79
-	12	15	-	LEDDRL102	P.88
-	12	13.5	-	LEDDRL301 CL15	P.88
-	12	70	-	LEDHL102-BK	P.74
-	12	70	-	LEDHL102-BK RHD	P.74
-	12	70	-	LEDHL102-CM	P.74

ECE	V	W		Product Reference	
-	12	70	-	LEDHL102-GTI	P.74
-	12	70	-	LEDHL103-GTI	P.70
-	12	70	-	LEDHL103-BK	P.70
-	12	70	-	LEDHL103-CM	P.70
-	12	70	-	LEDHL103-CM RHD	P.70
-	12	70	-	LEDHL104-GTI	P.70
-	12	70	-	LEDHL104-BK	P.70
-	12	70	-	LEDHL104-CM	P.70
-	12	70	-	LEDHL105	P.74
-	12	-	-	LEDHL107-BK	P.72
-	12	-	-	LEDHL107-BK RHD	P.72
-	12	-	-	LEDHL108-BK	P.73
-	12	-	-	LEDHL108-CM	P.73
-	3.4	3.5	-	LEDIL103	P.94
-	220	13-15	-	LEDIL104	P.94
-	3.7	0.5	-	LEDIL105	P.94
-	3.7	0.5	-	LEDIL106	P.94
-	3.7	1	-	LEDIL107	P.94
-	3.6	6	-	LEDIL108	P.94
-	4.5	1.5	-	LEDIL201	P.97
-	4.5	1.6	-	LEDIL202	P.97
-	4.5	1.5	-	LEDIL203	P.97
-	4.5	0.5	-	LEDIL204	P.97
-	4.5	0.5	-	LEDIL205	P.97
-	4.5	0.5	-	LEDIL205-PK	P.97
-	4.5	0.5	-	LEDIL205-BKPK	P.97
-	4.5	3	-	LEDIL206	P.97
-	4.5	3	-	LEDIL207	P.97
-	4.5	3	-	LEDIL209	P.97
-	3.7	10	-	LEDIL HELI 1000	P.97
-	3.7	20	-	LEDIL SPACE 1000	P.97
-	3.7	10	-	LEDIL FLOOD 10W	P.97
-	3.7	20	-	LEDIL FLOOD 20W	P.97
-	4.5	12	-	LEDIL PRO 180	P.97
-	4.5	-	-	LEDIL MN CP 80	P.97
-	12	-	-	LEDINT201	P.90
-	12	-	-	LEDINT201-SEC	P.90
-	12	-	-	LEDINT202	P.90
-	12	-	-	LEDINT203	P.90
-	12	-	-	LEDSC01	P.32
-	12	-	-	LEDSC02	P.32
-	12	-	-	LEDSC03	P.32
-	3	1.7	-	LEDSL101	P.102
-	4.5	0.5	-	LEDSL302	P.102
-	12	30	-	LEDTL102-CL	P.80
-	12	27	-	LEDTL101-CL	P.80
-	12/24	0.5	-	ONYX L+7	P.104
-	12/24	0.5	-	ONYX M+7	P.104
-	12/24	0.5	-	ONYX USB	P.104
-	12	1.6	PG18.5d-1	828DWP ¹⁾	P.28
-	12	2.1	W2.1x9.5d	921DWP ¹⁾	P.28
-	12	1.4	W2.1x9.5d	921DRP ¹⁾	P.28
-	12	1.2	BX8.4d	2351MFX6	P.50

ECE	V	W		Product Reference	
-	12	2	BX8.4d	2352MFX6	P.50
-	12	1.5	BX8.4d	2452MFX6	P.50
-	12	1.12	BX8.4d	2473MFX6	P.50
-	12	6.7	PG20-7	2604CW	P.26
-	12	1.2	W2x4.6d	2721	P.50
-	12	1.2	B8.5d	2721MF	P.50
-	12	1.2	BX8.5d	2721MFX	P.50
-	12	2	W2x4.6d	2722	P.50
-	12	2	B8.5d	2722MF	P.50
-	12	2	BX8.5d	2722MFX	P.50
-	12	2	W2.1x9.5d	2820	P.49
-	12	0.8	W2.1x9.5d	2825DWP ⁽¹⁾	P.28
-	12	0.6	W2.1x9.5d	2825DRP ⁽¹⁾	P.28
-	12	1	W2.1x9.5d	2827DYP ⁽¹⁾	P.28
-	12	6	W2.1x9.5d	2886X	P.49
-	12	2.0	W3x16q	3157DWP ⁽¹⁾	P.28
-	12	1.4	W3x16q	3157DRP ⁽¹⁾	P.28
-	12	1.3	W3x16q	3157DYP ⁽¹⁾	P.28
-	12	2	BA9s	3796	P.50
-	12	5	BA9s	3860	P.49
-	12	0.8	BA9s	3893DWP ⁽¹⁾	P.28
-	12	1.6	PG20-1	5201DWP	P.28
-	12	10	SV8.5-8	6411	P.50
-	12	5	SV8.5-8	6413	P.50
-	12	0.6	SV8.5-8	6413DWP ⁽¹⁾	P.28
-	12	0.6	SV8.5-8	6418DWP ⁽¹⁾	P.28
-	12	3	SV7-8	6428	P.50
-	12	10	SV8.5-8	6438	P.50
-	12	1.0	SV8.5-8	6438DWP ⁽¹⁾	P.28
-	12	10	SV8.5-8	6461	P.50
-	12	6	SV8.5-8	6486X	P.50
-	12	21/5	BA15d	7240	P.49
-	12	1.3	WX3x16d	7504DYP ⁽¹⁾	P.28
-	12	2.0	W3x16d	7505DWP ⁽¹⁾	P.28
-	12	1.4	W3x16d	7505DRP ⁽¹⁾	P.28
-	12	1.3	W3x16d	7505DYP ⁽¹⁾	P.28
-	12	1.9	BA15s	7506DWP ⁽¹⁾	P.28
-	12	1.9	BA15s	7506DRP ⁽¹⁾	P.28
-	12	1.3	BA15s	7506DYP ⁽¹⁾	P.28
-	12	1.3	BAU15s	7507DYP ⁽¹⁾	P.28
-	12	1.9	W3x16q	7515DWP ⁽¹⁾	P.28
-	12	1.7	W3x16q	7515DRP ⁽¹⁾	P.28
-	12	1.7	W3x16q	7515DYP ⁽¹⁾	P.28
-	12	2.0	BAY15d	7528DWP ⁽¹⁾	P.28
-	12	1.4	BA15s	7528DRP ⁽¹⁾	P.28
-	12	1.3	BA15s	7528DYP ⁽¹⁾	P.28
-	12/24	14	P43t	9726CW	P.24
-	12/24	14	P22d	9736CW	P.24
-	12	13	PY20d	9745CW	P.26
-	12	80	P14.5s	62150CBB ⁽¹⁾	P.66
-	12	100/90	P43t	62193CBB ⁽¹⁾	P.66
-	12	100	P14.5s	62200SBP ⁽¹⁾	P.64
-	12	100	PK22s	62201SBP ⁽¹⁾	P.64

ECE	V	W		Product Reference	
-	12	100/90	P43t	62204SBP ⁽¹⁾	P.64
-	12	80	PX26d	62210CBB ⁽¹⁾	P.66
-	12	75	PGJ19-2	62211CBB ⁽¹⁾	P.66
-	12	75	PGJ19-5	62213CBB ⁽¹⁾	P.66
-	12	80	PX26d	62261SBP ⁽¹⁾	P.64
-	12	20	BA9s	64111	P.50
-	12	10	BA9s	64113	P.50
-	12	5	BA9s	64115	P.50
-	12	12	P14.5s	64150DWP	P.24
-	12	100	PX14.5s	64152SB ⁽¹⁾	P.64
-	12	100	PKX22s	64153SB ⁽¹⁾	P.64
-	12	60/55	P45t	64198SB ⁽¹⁾	P.64
-	12	-	-	64210DA01	P.32
-	12	19	PX26d	64210DWNB	P.22
-	12	19	PX26d	64210DWNB-A01	P.22
-	12/24	19	PX26d	64210DWP	P.24
-	12/24	35	PK32d-2	66140CBB ⁽¹⁾	P.66
-	12/24	35	P32d-2	66240CBB ⁽¹⁾	P.66
-	12/24	35	PK32d-5	66340CBB ⁽¹⁾	P.66
-	12/24	35	P32d-5	66440CBB ⁽¹⁾	P.66
-	12/24	14	PX26d	67210CW	P.24
-	12/24	14	PGJ19-2	67211CW	P.24
-	12	13	PGJ19	67219CW	P.26
-	12	100	P20d	69005SBP ⁽¹⁾	P.64
-	12	100	P20d	69005CBB ⁽¹⁾	P.66
-	12	80	P22d	69006SBP ⁽¹⁾	P.64
-	12	80	P22d	69006CBB ⁽¹⁾	P.66
-	24	1	W2x4.6d	2341	P.52
-	24	1.2	W2x4.6d	2741	P.52
-	24	1.2	B8.5d	2741MF	P.52
-	24	1.2	BX8.5d	2741MFX	P.52
-	24	2	W2.1x9.5d	2840	P.52
-	24	2	BA9s	3797	P.52
-	24	3	SV8.5-8	6421	P.52
-	24	3	SV8.5-8	6430	P.52
-	24	5	SV8.5-8	6424	P.52
-	24	10	SV8.5-8	6429	P.52
-	24	15	BA15s	7529	P.52
C5W	12	5	SV8.5-8	6418	P.50
C5W	12	5	SV8.5-8	6418ULT	P.46
C5W	24	5	SV8.5-8	6423	P.52
D1S	85	35	PK32d-2	66140	P.38
D1S	85	35	PK32d-2	66140XNL	P.35
D1S	85	35	PK32d-2	66140CBI	P.36
D1S	85	35	PK32d-2	66140ULT	P.37
D1R	85	35	PK32d-3	66150	P.38
D1R	85	35	PK32d-3	66150CBI	P.36
D2S	85	35	P32d-2	66240	P.38
D2S	85	35	P32d-2	66240XNL	P.35
D2S	85	35	P32d-2	66240CBI	P.36
D2S	85	35	P32d-2	66240ULT	P.37
D2R	85	35	P32d-3	66250	P.38
D2R	85	35	P32d-3	66250CBI	P.36

ECE	V	W		Product Reference	
D3S	42	35	PK32d-5	66340	P.38
D3S	42	35	PK32d-5	66340XNL	P.35
D3S	42	35	PK32d-5	66340CBI	P.36
D3S	42	35	PK32d-5	66340ULT	P.37
D3R	42	35	PK32d-6	66350	P.38
D4S	42	35	P32d-5	66440	P.38
D4S	42	35	P32d-5	66440XNL	P.35
D4S	42	35	P32d-5	66440CBI	P.36
D4S	42	35	P32d-5	66440ULT	P.37
D4R	42	35	P32d-6	66450	P.38
D5S	12	25	PK32d-7	66540	P.38
D8S	42	25	PK32d-1	66548	P.38
H1	12	55	P14.5s	64150	P.48
H1	12	55	P14.5s	64150NL	P.41
H1	12	55	P14.5s	64150NBS	P.42
H1	12	55	P14.5s	64150CBI	P.43
H1	12	55	P14.5s	64150ULT	P.46
H1	24	70	P14.5s	64155	P.54
H1	24	70	P14.5s	64155TSP	P.53
H10	12	42	PY20d	9145	P.49
H11	12	55	PGJ19-2	64211	P.49
H11	12	55	PGJ19-2	64211NL	P.41
H11	12	55	PGJ19-2	64211NBS	P.42
H11	12	55	PGJ19-2	64211CBI	P.43
H11	12	55	PGJ19-2	64211ULT	P.46
H11	12	55	PGJ19-2	64211NR1	P.60
H11	12	55	PGJ19-2	64211NR5	P.60
H11	12	55	PGJ19-2	64211XR	P.62
H11	24	70	PGJ19-2	64216TSP	P.53
H11B	12	55	PGJY19-2	64241	P.49
H13	12	60/55	P26.4t	9008	P.49
H15	12	55/15	PGJ23t-1	64176	P.49
H15	12	55/15	PGJ23t-1	64176CBI	P.43
H15	24	20/60	PGJ23t-1	64177	P.54
H16	12	19	PGJ19-3	64219L+	P.49
H16	12	19	PGJ19-3	64219CBI	P.43
H18	12	55	PY26d-1	64180L	P.49
H19	12	60/55	PU43t-3	64181L	P.49
H2	12	55	X511	64173	P.48
H2	24	70	X511	64175	P.54
H21W	12	21	BAY9s	64136	P.50
H21W	24	21	BAY9s	64138	P.54
H27W/1	12	27	PG13	880	P.49
H27W/1	12	27	PG13	880CBI	P.43
H27W/2	12	27	PGJ13	881	P.49
H27W/2	12	27	PGJ13	881CBI	P.43
H3	12	55	PK22s	64151	P.48
H3	12	55	PK22s	64151NL	P.41
H3	12	55	PK22s	64151CBI	P.43
H3	24	70	PK22s	64156	P.54
H3	24	70	PK22s	64156TSP	P.53
H4	12	60/55	P43t	64193	P.49
H4	12	60/55	P43t	64193NL	P.41

ECE	V	W		Product Reference	
H4	12	60/55	P43t	64193NBS	P.42
H4	12	60/55	P43t	64193CBI	P.43
H4	12	60/55	P43t	64193ULT	P.46
H4	12	60/55	P43t	64193NR1	P.60
H4	12	60/55	P43t	64193NR5	P.60
H4	12	60/55	P43t	64193XR	P.62
H4	12	60/55	P43t	64193MC	P.62
H4	24	75/70	P43t	64196	P.54
H4	24	75/70	P43t	64196TSP	P.53
H4	24	75/70	P43t	94196	P.54
H6W	12	6	BAX9s	64132	P.49
H6W	12	6	BAX9s	64132ULT	P.46
H7	12	55	PX26d	64210	P.49
H7	12	55	PX26d	64210NL	P.41
H7	12	55	PX26d	64210NBS	P.42
H7	12	55	PX26d	64210CBI	P.43
H7	12	55	PX26d	64210ULT	P.46
H7	12	55	PX26d	64210NR1	P.60
H7	12	55	PX26d	64210NR5	P.60
H7	12	55	PX26d	64210XR	P.62
H7	12	55	PX26d	64210MC	P.62
H7	24	70	PX26d	64215	P.54
H7	24	70	PX26d	64215TSP	P.53
H8	12	35	PGJ19-1	64212	P.49
H8	12	35	PGJ19-1	64212NL	P.41
H8	12	35	PGJ19-1	64212CBI	P.43
H8	12	35	PGJ19-1	64212NR1	P.60
H8	12	35	PGJ19-1	64212XR	P.62
H8B	12	35	PGJY19-1	64242	P.49
H9	12	65	PGJ19-5	64213	P.49
H9B	12	65	PGJY19-5	64243	P.49
HB3	12	60	P20d	9005	P.49
HB3	12	60	P20d	9005NL	P.41
HB3	12	60	P20d	9005CBI	P.43
HB3A	12	60	P20d	9005XS	P.49
HB4	12	51	P22d	9006	P.49
HB4	12	51	P22d	9006NL	P.41
HB4	12	51	P22d	9006CBI	P.43
HB4A	12	51	P20d	9006XS	P.49
HB5	12	65/55	PX29t	9007	P.49
HIR1	12	65	PX20d	9011	P.49
HIR2	12	55	PX22d	9012	P.49
HIR2	12	55	PX22d	9012CBI	P.43
HS1	12	35/35	PX43t	64185	P.62
HS1	12	35/35	PX43t	64185NR9	P.60
HS1	12	35/35	PX43t	64185NR5	P.60
HS1	12	35/35	PX43t	64185XR	P.62
HY21W	12	21	BAW9s	64137ULT	P.46
P13W	12	13	PG18,5d-1	828	P.50
P21W	12	21	BA15s	7506	P.49
P21W	12	21	BA15s	7506ULT	P.46
P21W	24	21	BA15s	7511	P.54
P21W	24	21	BA15s	7511TSP	P.53

ECE	V	W		Product Reference	
P21/4W	12	21/4	BAZ15d	7225	P.49
P21/5W	12	21/5	BAY15d	7528	P.49
P21/5W	12	21/5	BAY15d	7528ULT	P.46
P21/5W	24	21/5	BAY15d	7537	P.54
P21/5W	24	21/5	BAY15d	7537TSP	P.53
P27W	12	27	W2.5x16d	3156	P.49
P27/7W	12	27/7	W2.5x16q	3157	P.49
PS19W	12	19	PG20-1	5201	P.50
PS24W	12	24	PG20-3	5202	P.50
PSX24W	12	24	PG20-7	2504	P.50
PSX26W	12	26	PG18.5d-3	6851	P.50
PY21W	12	21	BAU15s	7507	P.49
PY21W	12	21	BAU15s	7507ULT	P.49
PY21W	12	21	BAU15s	7507DC	P.44
PY21W	12	21	BAU15s	7507LDA	P.44
PY21W	24	21	BAU15s	7510TSP	P.53
PY27/7W	12	27/7	WX2.5x16q	3757AK	P.49
PR21W	12	21	BAW15s	7508LDR	P.44
PR21/5W	12	21/5	BAW15s	7538LDR	P.44
R10W	12	10	BA15s	5008	P.50
R10W	12	10	BA15s	5008ULT	P.46
R10W	24	10	BA15s	5637	P.54
R10W	24	10	BA15s	5637TSP	P.53
R2	12	45/40	P45t	64183	P.62
R5W	12	5	BA15s	5007	P.50
R5W	12	5	BA15s	5007ULT	P.46

ECE	V	W		Product Reference	
R5W	24	5	BA15d	5626	P.54
R5W	24	5	BA15s	5627	P.54
R5W	24	5	BA15s	5627TSP	P.53
RY10W	12	10	BAU15s	5009	P.50
S1	12	25/25	BA20d	64326	P.62
S2	12	35/35	BA20d	64327	P.62
S2	12	35/35	BA20d	64327XR	P.62
T4W	12	4	BA9s	3893	P.49
T4W	24	4	BA9s	3930	P.54
T4W	24	4	BA9s	3930TSP	P.53
W16W	12	16	W2.1x9.5d	921	P.49
W2.3W	12	2.3	W2x4.6d	2723	P.50
W21/5W	12	21/5	W3x16q	7515	P.50
W21W	12	21	W3x16d	7505	P.49
W3W	12	3	W2.1x9.5d	2821	P.50
W3W	24	3	W2.1x9.5d	2841	P.54
W5W	12	5	W2.1x9.5d	2825	P.49
W5W	12	5	W2.1x9.5d	2825ULT	P.46
W5W	12	5	W2.1x9.5d	2825HCB1	P.43
W5W	24	5	W2.1x9.5d	2845	P.54
W5W	24	5	W2.1x9.5d	2845TSP	P.53
WY5W	12	5	W2.1x9.5d	2827NA	P.49
WY16W	12	16	W2.1x9.5d	921NA	P.49
WY5W	12	5	W2.1x9.5d	2827DC	P.44
WY21W	12	21	WX3x16d	7504	P.49

1) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.

Type overview in numerical order of product reference with test data

Product Reference	ECE	V	W		V _{Test}	W _{th}	lm	T _h [h] B3/Tc 1)	
828	P13W	12	13	PG18,5d-1	13.5	19	250	1000	P.50
828DWP ²⁾	-	12	1.6	PG18.5d-1	13.5	1.9	130	1500/4000	P.28
880	H27W/1	12	27	PG13	13.5	31	450	-	P.49
880CBI	H27W/1	12	27	PG13	13.5	max. 31	477	-	P.43
881	H27W/2	12	27	PGJ13	13.5	31	450	-	P.49
881CBI	H27W/2	12	27	PGJ13	13.5	max. 31	477	-	P.43
921	W16W	12	16	W2.1x9.5d	13.5	19.4	310	400/1000	P.49
921DWP ²⁾	-	12	2.1	W2.1x9.5d	13.5	2.9	280	1500/4000	P.28
921DRP ²⁾	-	12	1.4	W2.1x9.5d	13.5	2.00	80	1500/4000	P.28
921NA	WY16W	12	16	W2.1x9.5d	13.5	19.4	190	400/1000	P.49
2341	-	24	1	W2x4.6d	28.0	1	3	300/1000	P.52
2351MFX6	-	12	1.2	BX8.4d	13.5	1.32	7.5	600/3000	P.50
2352MFX6	-	12	2	BX8.4d	13.5	2.13	11.8	1500/6000	P.50
2452MFX6	-	12	1.5	BX8.4d	13.5	1.8	6.5	1700/6500	P.50
2473MFX6	-	12	1.12	BX8.4d	14.0	1.12	3.6	500/5000	P.50
2504	PSX24W	12	24	PG20-7	13.5	max. 25	500	500/1000	P.50
2604CW	-	12	6.7	PG20-7	13.2	6.7	730	2500/5000	P.26
2721	-	12	1.2	W2x4.6d	13.5	1.22	7.5	500/2000	P.50
2721MF	-	12	1.2	B8.5d	13.5	1.2	6.4	500/2000	P.50
2721MFX	-	12	1.2	BX8.5d	13.5	1.2	6.4	500/2000	P.50
2722	-	12	2	W2x4.6d	13.5	2	12	1300/4000	P.50
2722MF	-	12	2	B8.5d	13.5	2	10.2	1300/4000	P.50
2722MFX	-	12	2	BX8.5d	13.5	2	10.2	1300/4000	P.50
2723	W2.3W	12	2.3	W2x4.6d	13.5	2.5	18.6	350/1200	P.50
2741	-	24	1.2	W2x4.6d	28.0	1.6	7.5	400/2000	P.52
2741MF	-	24	1.2	B8.5d	28.0	1.6	6.4	400/2000	P.52
2741MFX	-	24	1.2	BX8.5d	28.0	1.6	6.4	400/2000	P.52
2820	-	12	2	W2.1x9.5d	13.5	2.2	13.5	600/4000	P.49
2821	W3W	12	3	W2.1x9.5d	13.5	3	22	1300/4000	P.50
2825	W5W	12	5	W2.1x9.5d	13.5	5	50	350/1000	P.49
2825DWP ²⁾	-	12	0.8	W2.1x9.5d	13.5	1.12	70	1500/4000	P.28
2825DRP ²⁾	-	12	0.6	W2.1x9.5d	13.5	0.8	15	1500/4000	P.28
2825HCBI	W5W	12	5	W2.1x9.5d	13.5	5	50	350/1000	P.43
2825ULT	W5W	12	5	W2.1x9.5d	13.5	5	50	700/1500	P.46
2827DC	WY5W	12	5	W2.1x9.5d	13.5	5	30	200/500	P.44
2827DYP ²⁾	-	12	1	W2.1x9.5d	13.5	0.7	7	1500/4000	P.28
2827NA	WY5W	12	5	W2.1x9.5d	13.5	5	30	350/1000	P.49
2840	-	24	2	W2.1x9.5d	28.0	2.6	13	500/5000	P.54
2841	W3W	24	3	W2.1x9.5d	28.0	4	22	500/5000	P.54
2845	W5W	24	5	W2.1x9.5d	28.0	7	50	800/3000	P.54
2845TSP	W5W	24	5	W2.1x9.5d	28.0	7	50	1000/4000	P.52
2886X	-	12	6	W2.1x9.5d	13.5	6	85	400/1000	P.49
3156	P27W	12	27	W2.5x16d	13.5	29.2	475	600/0	P.49
3157	P27/7W	12	27/7	W2.5x16q	13.5	29.2/7.7	475/36	600/5000	P.49
3157DWP ²⁾	-	12	2.0	W3x16q	13.5	2.5/0.6	145/30	1500/4000	P.28
3157DRP ²⁾	-	12	1.4	W3x16q	13.5	1.8/0.6	60/10	1500/4000	P.28
3157DYP ²⁾	-	12	1.3	W3x16q	13.5	1.7/1.1	55/10	1500/4000	P.28
3757AK	PY27/7W	12	27/7	WX2.5x16q	13.5	29.2/17.7	280/21	460/1100	P.49
3796	-	12	2	BA9s	13.5	2	12.5	300/750	P.50
3797	-	24	2	BA9s	28	3	17.5	1000/2000	P.54

Product Reference	ECE	V	W		V _{Test}	W _{th}	lm	T _h [°C] B3/Tc 1)	
3860	-	12	5	BA9s	13.5	5	50	400/1000	P.49
3893	T4W	12	4	BA9s	13.5	4	35	600/1200	P.49
3893DWP ²⁾	-	12	0.8	BA9s	13.5	1.0	75	1500/4000	P.28
3930	T4W	24	4	BA9s	28.0	5	35	250/500	P.54
3930TSP	T4W	24	4	BA9s	28.0	5	35	550/1000	P.52
5007	R5W	12	5	BA15s	13.5	5	50	350/800	P.50
5007ULT	R5W	12	5	BA15s	13.5	5	50	600/1200	P.46
5008	R10W	12	10	BA15s	13.5	10	125	350/800	P.50
5008ULT	R10W	12	10	BA15s	13.5	10	125	600/1200	P.46
5009	RY10W	12	10	BAU15s	13.5	10	75	350/800	P.50
5201	PS19W	12	19	PG20-1	13.5	max. 20	350	500/1000	P.50
5201DWP ²⁾	-	12	1.6	PG20-1	13.5	1.9	140	1500/4000	P.28
5202	PS24W	12	24	PG20-3	13.5	max. 25	500	500/1000	P.50
5626	R5W	24	5	BA15d	28.0	7	50	80/250	P.54
5627	R5W	24	5	BA15s	28.0	7	50	500/1000	P.54
5627TSP	R5W	24	5	BA15s	28.0	7	50	800/2000	P.52
5637	R10W	24	10	BA15s	28.0	12.5	125	400/800	P.54
5637TSP	R10W	24	10	BA15s	28.0	12.5	125	1000/2000	P.54
6411	-	12	10	SV8.5-8	13.5	10	100	500/1000	P.50
6413	-	12	5	SV8.5-8	13.5	5	45	1000/2000	P.50
6413DWP ²⁾	-	12	0.6	SV8.5-8	13.5	0.8	55	2500/5000	P.28
6418	C5W	12	5	SV8.5-8	13.5	5	45	1000/2000	P.50
6418DWP ²⁾	-	12	0.6	SV8.5-8	13.5	0.8	45	2500/5000	P.28
6418ULT	C5W	12	5	SV8.5-8	13.5	5	45	1500/4000	P.46
6421	-	24	3	SV8.5-8	24.0	3	17	800/1500	P.54
6423	C5W	24	5	SV8.5-8	28.0	7	45	1500/4000	P.54
6424	-	24	5	SV8.5-8	28.0	7	60	1000/2000	P.54
6428	-	12	3	SV7-8	13.5	3.5	29	600/1200	P.50
6429	-	24	10	SV8.5-8	28.0	10	105	300/600	P.54
6430	-	24	3	SV7-8	28.0	3	23	400/800	P.54
6438	-	12	10	SV8.5-8	13.0	10	120	200/500	P.63
6438DWP ²⁾	-	12	1	SV8.5-8	13.5	45	1.2	2500/5000	P.28
6461	-	12	10	SV8.5-8	13.5	10	105	600/1200	P.50
6486X	-	12	6	SV8.5-8	13.5	6	85	350/600	P.50
6851	PSX26W	12	26	PG18.5d-3	13.5	26	500	1000	P.50
7225	P21/4W	12	21/4	BAZ15d	13.5	25/5	440/15	180/1250 //290/4000	P.49
7240	-	12	21/5	BA15d	13.5	25/6	440/35	180/1250//290/4000	P.49
7504	WY21W	12	21	WX3x16d	13.5	25	280	400/600	P.49
7504DYP ²⁾	-	12	1.3	WX3x16d	13.5	1.8	55	1500/4000	P.28
7505	W21W	12	21	W3x16d	13.5	25	460	400/600	P.49
7505DWP ²⁾	-	12	2	W3x16d	13.5	2.8	145	1500/4000	P.28
7505DRP ²⁾	-	12	1.4	W3x16d	13.5	2.0	60	1500/4000	P.28
7505DYP ²⁾	-	12	1.3	W3x16d	13.5	2.0	55	1500/4000	P.28
7506	P21W	12	21	BA15s	13.5	25	460	250/500	P.49
7506DWP ²⁾	-	12	1.9	BA15s	13.5	2.5	160	1500/4000	P.28
7506DYP ²⁾	-	12	1.3	BA15s	13.5	2.8	100	1500/4000	P.28
7506DRP ²⁾	-	12	1.3	BA15s	13.5	2.8	50	1500/4000	P.28
7506ULT	P21W	12	21	BA15s	13.5	25	460	500/1000	P.46
7507	PY21W	12	21	BAU15s	13.5	25	280	250/500	P.49
7507DC	PY21W	12	21	BAU15s	13.5	25	280	100/250	P.44

Product Reference	ECE	V	W		V _{Test}	W _{Th}	lm	T[h] B3/Tc 1)	
7507DYP ²⁾	-	12	1.3	BAU15s	13.5	1.8	50	1500/4000	P.28
7507LDA	PY21W	12	21	BAU15s	13.5	25	280	100/250	P.44
7507ULT	PY21W	12	21	BAU15s	13.5	25	280	500/1000	P.46
7508LDR	PR21W	12	21	BAW15s	13.5	25	110	500/1000	P.44
7510TSP	PY21W	24	21	BAU15s	28.0	28	250	250/500	P.52
7511	P21W	24	21	BA15s	28.0	28	460	200/400	P.54
7511TSP	P21W	24	21	BA15s	28.0	28	460	250/500	P.52
7515	W21/5W	12	21/5	W3x16q	13.5	25/6	440/35	400/600//3000/3000	P.50
7515DWP ²⁾	-	12	1.9	W3x16q	13.5	2.7/0.6	155/25	1500/4000	P.28
7515DRP ²⁾	-	12	1.7	W3x16q	13.5	2.4/0.6	80/10	1500/4000	P.28
7515DYP ²⁾	-	12	1.7	W3x16q	13.5	1.8/1.3	50/10	1500/4000	P.28
7528	P21/5W	12	21/5	BAY15d	13.5	25/6	440/35	180/1250//290/4000	P.49
7528DWP ²⁾	-	12	2	BAY15d	13.5	2.5/0.5	145/30	1500/4000	P.28
7528DRP ²⁾	-	12	1.4	BAY15d	13.5	1.6/0.6	100/10	1500/4000	P.28
7528DYP ²⁾	-	12	1.3	BAY15d	13.5	1.5/0.9	55/10	1500/4000	P.28
7528ULT	P21/5W	12	21/5	BAY15d	13.5	25/6	440/35	300/3000//800/6000	P.46
7529	-	24	15	BA15s	28.0	15	210	100/300	P.54
7537	P21/5W	24	21/5	BAY15d	28.0	28/10	440/40	60/600//160/1600	P.54
7537TSP	P21/5W	24	21/5	BAY15d	28.0	28/10	440/40	100/1000//200/2000	P.52
7538LDR	PR21/5W	12	21/5	BAW15d	13.5	25/6	105/8	300/3000//800/6000	P.44
9005	HB3	12	60	P20d	13.2	73	1860	280/550	P.49
9005NL	HB3	12	60	P20d	13.2	73	1860	110/210	P.41
9005CBI	HB3	12	60	P20d	13.2	73	1860	110/220	P.43
9005XS	HB3A	12	60	P20d	13.2	max. 73	1860	-	P.49
9006	HB4	12	51	P22d	13.2	62	1095	860/1720	P.49
9006NL	HB4	12	51	P22d	13.2	62	1095	270/500	P.41
9006CBI	HB4	12	51	P22d	13.2	62	1095	260/520	P.43
9006XS	HB4A	12	51	P20d	13.2	62	1095	860/1720	P.49
9007	HB5	12	65/55	PX29t	12.8	70/60	1350/1000	250/500	P.49
9008	H13	12	60/55	P26.4t	13.2	75/68	1700/1100	170/1290//350/2590	P.49
9011	HIR1	12	65	PX20d	13.2	max. 73	2500	220/300	P.49
9012	HIR2	12	55	PX22d	13.2	max. 63	1875	500/870	P.49
9012CBI	HIR2	12	55	PX22d	13.2	63	1875	300/500	P.43
9145	H10	12	42	PY20d	13.2	50	850	860/1720	P.49
9745CW ²⁾	-	12	13	PY20d	-	-	730	-	P.26
9726CW ²⁾	-	12	-	P43t	-	-	-	-	P.24
9736CW ²⁾	-	12	-	P22t	-	-	-	-	P.24
62150CBB ²⁾	-	12	80	P14.5s	13.2	80	1150	75/150	P.66
62193CBB ²⁾	-	12	100/90	P43t	13.2	100/90	1600/760	60/200//120/400	P.66
62200SBP ²⁾	-	12	100	P14.5s	13.2	max. 94	2600	23/50	P.64
62201SBP ²⁾	-	12	100	PK22s	13.2	max. 95	2300	22/50	P.64
62204SBP ²⁾	-	12	100/90	P43t	13.2	100/90	2900/1530	100/200//300/550	P.64
62210CBB ²⁾	-	12	80	PX26d	13.2	80	1100	150/350	P.66
62211CBB ²⁾	-	12	75	PGJ19-2	13.2	75	1000	200/400	P.66
62213CBB ²⁾	-	12	75	PGJ19-5	13.2	75	1100	200/400	P.66
62261SBP ²⁾	-	12	80	PX26d	13.2	80	1950	250/500	P.64
64111	-	12	5	BA9s	13.5	5	80	150/500	P.50
64113	-	12	10	BA9s	13.5	10	200	150/400	P.50
64115	-	12	20	BA9s	13.5	22.5	450	150/500	P.50
64132	H6W	12	6	BAX9s	13.5	7	125	350/700	P.49

Product Reference	ECE	V	W		V _{Test}	W _h	lm	T[h] B3/Tc 1)	
64132ULT	H6W	12	6	BAX9s	13.5	7	125	600/1000	P.46
64136	H21W	12	21	BAY9s	13.5	25	600	300/600	P.50
64137ULT	HY21W	12	21	BAW9s	13.5	26.25	300	400/700	P.46
64138	H21W	24	21	BAY9s	28.0	28	600	150/400	P.54
64150	H1	12	55	P14.5s	13.2	68	1550	400/650	P.48
64150NL	H1	12	55	P14.5s	13.2	68	1550	150/300	P.41
64150NBS	H1	12	55	P14.5s	13.2	68	1550	250/450	P.42
64150CBI	H1	12	55	P14.5s	13.2	68	1550	150/250	P.43
64150ULT	H1	12	55	P14.5s	13.2	68	1550	1200/2000	P.46
64151	H3	12	55	PK22s	13.2	68	1450	400/650	P.48
64151NL	H3	12	55	PK22s	13.2	68	1450	150/300	P.41
64151CBI	H3	12	55	PK22s	13.2	68	1300	150/250	P.43
64152SB ²⁾	-	12	100	PX14,5s	13.2	93	2600	22.5/50	P.64
64153SB ²⁾	-	12	100	PKX22s	13.2	85	2300	23/50	P.64
64155	H1	24	70	P14.5s	28.0	84	1900	400/650	P.54
64155TSP	H1	24	70	P14.5s	28.0	84	1900	600/1200	P.52
64156	H3	24	70	PK22s	28.0	84	1750	400/650	P.54
64156TSP	H3	24	70	PK22s	28.0	max. 84	1750	600/1200	P.52
64173	H2	12	55	X511	13.2	68	1800	90/250	P.48
64175	H2	24	70	X511	28.0	84	2150	90/250	P.54
64176	H15	12	55/15	PGJ23t-1	13.2	19/64	260/1350	2000/250//4000/500	P.49
64176CBI	H15	12	55/15	PGJ23t-1	13.2	max. 19/64	260/1350	1000/100//2000/200	P.43
64177	H15	24	20/60	PGJ23t-1	28.0	max. 84	300/1500	1500/200//3000/400	P.54
64180L	H18	12	55	PY26d-1	13.2	max. 69	1700	700/1100	P.49
64181L	H19	12	60/55	PU43t-3	13.2	max. 68/72	1750/1200	300/600//800/1600	P.49
64183	R2	12	45/40	P45t	13.2	48.5/46.5	1030/740	250/400//500/1200	P.62
64185	HS1	12	35/35	PX43t	13.2	36.8/36.8	820/520	75/150//150/300	P.62
64185NR9	HS1	12	35/35	PX43t	13.2	35/35	825/525	75/120//120/240	P.60
64185NR5	HS1	12	35/35	PX43t	13.2	36.8/36.8	820/520	75/120//120/240	P.60
64185XR	HS1	12	35/35	PX43t	13.2	35/35	825/525	75/120//120/240	P.62
64193	H4	12	60/55	P43t	13.2	75/68	1650/1000	250/400//500/900	P.49
64193NL	H4	12	60/55	P43t	13.2	75/68	1650/1000	80/200//160/400	P.41
64193NBS	H4	12	60/55	P43t	13.2	75/68	1650/1000	250/400//450/700	P.42
64193CBI	H4	12	60/55	P43t	13.2	75/68	1650/1000	50/200//100/400	P.43
64193ULT	H4	12	60/55	P43t	13.2	75/68	1650/1000	300/2000//700/3000	P.46
64193NR1	H4	12	60/55	P43t	13.2	75/68	1650/1000	80/260//160/400	P.60
64193NR5	H4	12	60/55	P43t	13.2	75/68	1650/1000	250/400//450/700	P.60
64193MC	H4	12	60/55	P43t	13.2	75/68	1650/1000	250/400//500/900	P.62
64193XR	H4	12	60/55	P43t	13.2	75/68	1650/1000	50/180//100/380	P.80
64196	H4	24	75/70	P43t	28.0	85/80	1900/1200	170/350//400/800	P.54
64196TSP	H4	24	75/70	P43t	28.0	85/80	1900/1200	140/450//300/1000	P.52
64198SB ²⁾	-	12	60/55	P45t	13.2	75/68	1650/1000	250/400//500/900	P.64
64210	H7	12	55	PX26d	13.2	58	1500	330/550	P.49
64210DWNB	(H7)	12	19	PX26d	-	-	-	-	P.23
64210NL	H7	12	55	PX26d	13.2	58	1500	150/250	P.41
64210NBS	H7	12	55	PX26d	13.2	58	1500	250/450	P.42
64210CBI	H7	12	55	PX26d	13.2	58	1500	100/200	P.43
64210ULT	H7	12	55	PX26d	13.2	58	1500	1000/1500	P.46
64210NR1	H7	12	55	PX26d	13.2	58	1500	150/250	P.60
64210NR5	H7	12	55	PX26d	13.2	58	1500	250/450	P.60
64210XR	H7	12	55	PX26d	13.2	58	1500	100/200	P.62

Product Reference	ECE	V	W		V _{Test}	W _h	lm	T[h] B3/Tc 1)	
64210MC	H7	12	55	PX26d	13.2	58	1500	330/550	P.62
64211NR5	H11	12	55	PGJ19-2	13.2	62	1350	250/450	P.60
64211XR	H11	12	55	PGJ19-2	13.2	62	1350	100/200	P.62
64212	H8	12	35	PGJ19-1	13.2	43	800	400/800	P.49
64212NL	H8	12	35	PGJ19-1	13.2	max. 43	800	250/500	P.41
64212CBI	H8	12	35	PGJ19-1	13.2	43	800	250/500	P.43
64212NR1	H8	12	35	PGJ19-1	13.2	43	800	250/500	P.60
64212XR	H8	12	35	PGJ19-1	13.2	43	800	250/500	P.62
64213	H9	12	65	PGJ19-5	13.2	73	2100	250/500	P.49
64215	H7	24	70	PX26d	28.0	75	1750	220/500	P.54
64215TSP	H7	24	70	PX26d	28.0	75	1750	500/1000	P.52
64216TSP	H11	24	70	PGJ19-2	28.0	max. 80	1600	500/1000	P.52
64219CBI	H16	12	19	PGJ19-3	13.2	max. 26	500	250/500	P.43
64219L+	H16	12	19	PGJ19-3	13.2	26	500	1115/2000	P.49
64241	H11B	12	55	PGJY19-2	13.2	62	1350	350/580	P.49
64242	H8B	12	35	PGJY19-1	13.2	43	800	400/800	P.49
64243	H9B	12	65	PGJY19-5	13.2	73	2100	250/500	P.49
64326	S1	12	25/25	BA20d	13.5	25/25	430/310	-	P.62
64327	S2	12	35/35	BA20d	13.5	35/35	650/460	80/160	P.62
64327XR	S2	12	35/35	BA20d	13.5	35/35	650/465	75/150//120/300	P.62
66140	D1S	85	35	PK32d-2	13.5	35	3200	2000/3000	P.38
66140XNL	D1S	85	35	PK32d-2	13.5	35	3200	1500/3000	P.35
66140CBI	D1S	85	35	PK32d-2	13.5	35	3200	1500/3000	P.36
66140ULT	D1S	85	35	PK32d-2	13.5	35	3200	-	P.37
66140CBB ²⁾	-	85	35	PK32d-2	13.2	35	3200	600/1500	P.66
66150	D1R	85	35	PK32d-3	13.5	35	2800	2000/3000	P.38
66150CBI	D1R	85	35	PK32d-3	13.5	35	2800	1500/3000	P.36
66240	D2S	85	35	P32d-2	13.5	35	3200	2000/3000	P.38
66240XNL	D2S	85	35	P32d-2	13.5	35	3200	1500/3000	P.35
66240CBI	D2S	85	35	P32d-2	13.5	35	3200	1800/2800	P.36
66240ULT	D2S	85	35	P32d-2	13.5	35	3200	-	P.37
66240CBB ²⁾	-	85	35	P32d-2	13.2	35	3200	600/1500	P.66
66250	D2R	85	35	P32d-3	13.5	35	2800	2000/3000	P.38
66250CBI	D2R	85	35	P32d-3	13.5	35	2800	1500/2000	P.36
66340	D3S	42	35	PK32d-5	13.5	35	3200	2000/4000	P.38
66340XNL	D3S	42	35	PK32d-5	13.5	35	3200	2000/3000	P.35
66340CBI	D3S	42	35	PK32d-5	13.5	35	3200	2000/3000	P.36
66340ULT	D3S	42	35	PK32d-5	13.5	35	3200	-	P.37
66340CBB ²⁾	-	85	35	PK32d-5	13.2	35	3200	-	P.66
66350	D3R	42	35	PK32d-6	13.5	35	2800	2000/3000	P.38
66440	D4S	42	35	P32d-5	13.5	35	3200	2000/4000	P.38
66440XNL	D4S	42	35	P32d-5	13.5	35	3200	2000/3000	P.35
66440CBI	D4S	42	35	P32d-5	13.5	35	3200	2000/3000	P.36
66440ULT	D4S	42	35	P32d-5	13.5	35	3200	-	P.37
66440CBB ²⁾	-	85	35	P32d-5	13.2	35	3200	-	P.66
66450	D4R	42	35	P32d-6	13.5	35	2800	2000/3000	P.38
66540	D5S	12	25	PK32d-7	13.2	25	2000	2500/4000	P.38
66548	D8S	42	25	PK32d-1	13.5	25	2000	2500/4000	P.38
67210CW	-	12	-	PX26d	-	-	-	-	P.24
67211CW	-	12	-	PGJ19-2	-	-	-	-	P.24

Product Reference	ECE	V	W		V _{Test}	W _{th}	lm	T _h [h] B3/Tc 1)	
67219CW	-	12	13	PGJ19	12	13	730	-	P.26
69005SBP ²⁾	-	12	100	P20d	13.2	100	2885	280/550	P.64
69005CBB ²⁾	-	12	100	P20d	13.2	100	1100	350/700	P.66
69006SBP ²⁾	-	12	80	P22d	13.2	max. 80	1890	600/1200	P.64
69006CBB ²⁾	-	12	80	P22d	13.2	80	900	300/600	P.66
94196	H4	24	75/70	P43t	28.0	85/80	1900/1200	170/500//400/1500	P.54
LEDCBCTRL101	-	12	5	-	-	-	-	-	P.32
LEDCBCTRL102	-	12	21	-	-	-	-	-	P.32
LEDCBCTRL103	-	12	50	-	-	-	-	-	P.32
LEDDL ACC 101	-	12	-	-	-	-	-	-	P.84
LEDDL ACC 102	-	12	-	-	-	-	-	-	P.84
LEDDL ACC 103	-	12	-	-	-	-	-	-	P.84
LEDDL101-SP	-	12/24	22/2	-	13.5	22/2	1250	5000	P.86
LEDDL101-WD	-	12/24	22/2	-	13.5	22/2	1250	5000	P.86
LEDDL102-SP	-	12/24	30/2	-	13.5	30/2	2000	5000	P.84
LEDDL102-WD	-	12/24	30/2	-	13.5	30/2	2000	5000	P.86
LEDDL103-SP	-	12/24	35	-	13.2	35	2700	5000	P.82
LEDDL103-CB	-	12/24	35	-	13.2	35	2700	5000	P.82
LEDDL104-SP	-	12/24	36	-	13.2	36	4600	5000	P.82
LEDDL104-CB	-	12/24	68	-	13.2	36	4600	5000	P.82
LEDDL104-CB SM	-	12/24	68	-	13.2	36	4600	5000	P.82
LEDDL105-SP	-	12/24	14	-	13.2	14	1300	5000	P.82
LEDDL106-SP	-	12/24	29	-	13.2	29	2600	5000	P.82
LEDDL106-CB	-	12/24	29	-	13.2	29	2600	5000	P.82
LEDDL107-SP	-	12/24	46	-	13.2	46	3900	5000	P.82
LEDDL107-CB	-	12/24	44	-	13.2	46	3900	5000	P.82
LEDDL108-WD	-	12/24	15	-	13.2	15	1100	5000	P.85
LEDDL109-WD	-	12/24	15	-	13.2	15	1100	5000	P.85
LEDDL110-CB	-	12/24	45/1	-	13.2	49/1	2700	5000	P.84
LEDDL111-CB	-	12/24	39/1	-	13.2	39/1	3000	5000	P.84
LEDDL112-CB	-	12/24	60/2.5	-	13.2	60/2.5	3500	5000	P.84
LEDDL113-CB	-	12/24	70/1.5	-	13.2	70/1.5	4000	5000	P.84
LEDDL114-CB SM	-	12/24	140	-	13.2	140	8000	5000	P.82
LEDDL115-SP	-	12/24	27	-	13.2	27	1500	5000	P.85
LEDDL116-SP	-	12/24	63	-	13.2	63	2800	5000	P.85
LEDDL117-CB	-	12/24	30	-	13.2	30	2100	5000	P.85
LEDDL118-CB	-	12/24	55	-	13.2	55	4100	5000	P.85
LEDDL119-WD	-	12/24	30	-	13.2	22	1150	5000	P.85
LEDDMI 5G0 WT S	-	12	2.4	-	13.2	2.4	-	5000	P.76
LEDDMI 5G0 BK S	-	12	2.4	-	13.2	2.4	-	5000	P.76
LEDDMI 5K0 WT S	-	12	2.4	-	13.2	2.4	-	5000	P.76
LEDDMI 5K0 BK S	-	12	2.4	-	13.2	2.4	-	5000	P.76
LEDDMI 3G0 WT S	-	12	2.4	-	13.2	2.4	-	5000	P.76
LEDDMI F20 WT S	-	12	4.56	-	13.2	4.56	-	5000	P.78
LEDDMI F20 BK S	-	12	4.56	-	13.2	4.56	-	5000	P.78
LEDDMI 5F0 WT S	-	12	2.4	-	13.2	2.4	-	5000	P.78
LEDDMI 5F0 BK S	-	12	2.4	-	13.2	2.4	-	5000	P.78
LEDDMI 8W0 WT S	-	12	2.4	-	13.2	2.4	-	5000	P.78
LEDDMI 8W0 BK S	-	12	2.4	-	13.2	2.4	-	5000	P.79
LEDDMI 8V0 WT S	-	12	2.4	-	13.2	2.4	-	5000	P.79

Product Reference	ECE	V	W		V _{Test}	W _{th}	lm	T _h [°C] B3/Tc 1)	
LEDDMI 8V0 BK S -		12	2.4	-	13.2	2.4	-	5000	P.79
LEDDRL102 -		12	15	-	14.0	15	300	5000	P.88
LEDDRL301CL15 -		12	13.5	-	14.0	13.5	300	5000	P.88
LEDHL102-BK -		12	70	-	-	-	-	-	P.74
LEDHL102-BK RHD -		12	70	-	-	-	-	-	P.74
LEDHL102-CM -		12	70	-	-	-	-	-	P.74
LEDHL102-GTI -		12	70	-	-	-	-	-	P.74
LEDHL103-GTI -		12	70	-	-	-	-	-	P.70
LEDHL103-BK -		12	70	-	-	-	-	-	P.70
LEDHL103-CM -		12	70	-	-	-	-	-	P.70
LEDHL103-CM RHD -		12	70	-	-	-	-	-	P.70
LEDHL104-GTI -		12	-	-	-	-	-	-	P.70
LEDHL104-BK -		12	-	-	-	-	-	-	P.70
LEDHL104-CM -		12	-	-	-	-	-	-	P.70
LEDHL105 -		12	70	-	-	-	-	-	P.74
LEDHL107-BK -		12	-	-	-	-	-	-	P.72
LEDHL107-BK RHD -		12	-	-	-	-	-	-	P.72
LEDHL108-BK -		12	-	-	-	-	-	-	P.73
LEDHL108-CM -		12	-	-	-	-	-	-	P.73
LEDIL103 -		3.4	3.5	-	-	-	280	6000	P.94
LEDIL104 -		220	13-15	-	90-250	13-15	1.400	-	P.94
LEDIL105 -		3.4	3.5	-	3.7	0.5	150/35	-	P.94
LEDIL106 -		3.4	3.5	-	3.7	0.5	150	-	P.94
LEDIL107 -		3.4	3.5	-	3.7	1	280/70	-	P.94
LEDIL108 -		3.6	6	-	-	-	-	-	P.94
LEDIL201 -		4.5	1.5	-	-	-	80/25	5000	P.97
LEDIL202 -		4.5	1.6	-	-	-	125/90	5000	P.97
LEDIL203 -		4.5	1.5	-	-	-	80	5000	P.97
LEDIL204 -		3.7	0.5	-	-	-	160/75	6500	P.97
LEDIL205 -		3.6	0.5	-	-	-	15	6500	P.97
LEDIL205-PK -		3.6	0.5	-	-	-	15	6500	P.97
LEDIL205-BKPK -		3.6	0.5	-	-	-	15	6500	P.97
LEDIL206 -		3.7	3	-	-	-	250/30	6500	P.97
LEDIL207 -		3.7	3	-	-	-	150/70	6500	P.97
LEDIL209 -		4.5	3	-	-	-	300/60	6500	P.97
LEDIL HELI 1000 -		3.7	10	-	-	-	-	1000/500	P.97
LEDIL SPACE 1000 -		3.7	20	-	-	-	-	1000/500	P.97
LEDIL FLOOD 10W -		3.7	10	-	-	-	-	1000	P.97
LEDIL FLOOD 20W -		3.7	20	-	-	-	-	2000	P.97
LEDIL PRO 180 -		4.5	12	-	-	-	-	180/40	P.97
LEDIL MN CP 80 -		4.5	-	-	-	-	-	80/40	P.97
LEDINT201 -		12	-	-	-	-	-	-	P.90
LEDINT201-SEC -		12	-	-	-	-	-	-	P.90
LEDINT202 -		12	-	-	-	-	-	-	P.90
LEDINT203 -		12	-	-	-	-	-	-	P.90
LEDSC01 -		12	-	-	-	-	-	-	P.32
LEDSC02 -		12	-	-	-	-	-	-	P.32
LEDSC03 -		12	-	-	-	-	-	-	P.32
LEDSL101 -		3	1.7	-	-	-	-	-	P.102
LEDSL302 -		4.5	0.5	-	-	-	-	-	P.102

Product Reference	ECE	V	W		V _{Test}	W _{B3}	Im	T[h] B3/Tc 1)	
LEDTL101-CL	-	12	27	-	-	-	-	-	P.80
LEDTL102-CL	-	12	30	-	-	-	-	-	P.80
LEDWL101-SP	-	12/24	8	-	-	-	-	-	P.86
LEDWL102-SP	-	12/24	8	-	-	-	-	-	P.86
LEDWL103-WD	-	12/24	8	-	-	-	-	-	P.86
ONYX L+7	-	12/24	0.5	-	-	0.5	20	-	P.104
ONYX M+7	-	12/24	0.5	-	-	0.5	20	-	P.104
ONYX-USB	-	12/24	0.5	-	-	0.5	20	-	P.104

1) What do B3 and Tc mean in connection with the service life of bulbs? If we consider the service lives of products that are designed to last a certain time, we can see that they all have identical or similar failure characteristics. If we plot the service lives of the individual bulbs on special logarithmic graph paper, the graph produced is called a “Weibull distribution curve”. In a stable production process, we obtain a straight line for the service life via which we can read off various life values. For its products in the automotive sector, OSRAM specifies a B3 value, which indicates the time at which 3% of the tested bulbs have failed. OSRAM also specifies the Tc value (characteristic Weibull value), which indicates the time at which 63.2% of the bulbs have failed. Formerly, only the average value was specified (the average life), which in this system would correspond to a B50 value (i.e. the time at which 50% of the bulbs have failed). By specifying both the B3 value and the Tc value it is possible to get an idea of the spread of the product’s service life and hence the quality of the product.

Explanation: single filament lamp e.g. 100/300 | dual filament lamp e.g. $\underbrace{100/300}_{B_3} / \underbrace{500/100}_{T_c}$

2) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country

Regional EAN overview

The new packaging reflects specific regional requirements by offering regionalized variants with a dedicated EAN.

■ Region 1 = WEST-MEA
 ■ Region 2 = CIS
 ■ Region 3 = EASTIC
 ■ Region 4 = LATAM
 ■ Region 5 = EMEA

COUNTRY	REGION LED + VAP Blister, DUO BOX	REGION ORIGINAL Blister	COUNTRY	REGION LED + VAP blister, DUO BOX	REGION ORIGINAL Blister	COUNTRY	REGION LED + VAP blister, DUO BOX	REGION ORIGINAL Blister	COUNTRY	REGION LED + VAP blister, DUO BOX	REGION ORIGINAL Blister
Albania	■	■	Democratic Republic of Congo	■		Lebanon	■	■	São Tomé and Príncipe	■	
Algeria	■	■	Denmark	■	■	Lesotho	■		Saudi Arabia	■	■
Andorra	■		Dominica	■		Liberia	■		Senegal	■	
Angola	■	■	Dominican Republic	■		Libya	■	■	Serbia	■	■
Antigua and Barbuda	■		Gabun	■		Liechtenstein	■		Seychelles	■	
Equatorial Guinea	■		Gambia	■		Lithuania	■	■	Sierra Leone	■	
Argentina	■		Ghana	■		Macedonia	■	■	Slovakia	■	■
Armenia	■	■	Grenada	■		Madagascar	■		Slovenia	■	■
Austria	■	■	Georgia	■	■	Malawi	■		Somalia	■	
Azerbaijan	■	■	Germany	■	■	Mali	■		South Africa	■	■
Bahamas	■		Greece	■	■	Malta	■		South Sudan	■	
Bahrain	■	■	Guatemala	■		Mauretania	■		Spain	■	■
Barbados	■		Guinea	■		Mauritius	■		Sudan	■	
Belarus	■	■	Guinea-Bissau	■		Monaco	■	■	Suriname	■	
Belize	■		Guyana	■		Morocco	■	■	Swasiland	■	
Benelux (Belgium, Netherlands, Luxembourg)	■	■	Haiti	■		Mexico	■		Sweden	■	■
Benin	■		Honduras	■		Moldavia	■	■	Switzerland	■	■
Bolivia	■		Djibouti	■		Monte Negro	■	■	Syria	■	■
Bosnia and Herzegovina	■	■	Ecuador	■		Mosambique	■	■	Tajikistan	■	
Botswana	■	■	El Salvador	■		Namibia	■	■	Tanzania	■	■
Brazil	■		Egypt	■	■	Nicaragua	■		Togo	■	
Bulgaria	■	■	Eritrea	■		Niger	■		Trinidad and Tobago	■	
Burkina Faso	■		Estonia	■	■	Nigeria	■	■	Tunisia	■	■
Burundi	■		Ethiopia	■	■	Norway	■	■	Turkey	■	■
Burkina Faso	■		Finland	■	■	Oman	■	■	Uganda	■	
Cameroon	■		France	■	■	Pakistan	■	■	Ukraine	■	■
Cape Verde	■		Hungary	■	■	Palestine	■	■	UK/Ireland	■	■
Central African Rep.	■		Iceland	■		Panama	■		Ukraine	■	■
Chad	■		Iran	■	■	Paraguay	■		United Arab Emirates	■	■
Chile	■		Iraq	■	■	Peru	■		Uruguay	■	
Comoros	■		Israel	■	■	Poland	■	■	Uzbekistan/	■	■
Congo	■		Italy	■	■	Portugal	■	■	Turkmenistan	■	
Colombia	■		Jamaica	■		Qatar	■	■	Vatican City	■	
Costa Rica	■		Jordan	■	■	Romania	■	■	Venezuela	■	
Côte d'Ivoire	■		Kazakhstan/	■	■	Rwanda	■		Yemen	■	■
Croatia	■	■	Kirgisistan	■		Russia	■	■	Zambia	■	
Czechia	■	■	Kenya	■	■	Saint Kitts and Nevis	■		Zimbabwe	■	■
Cuba	■		Kosovo	■	■	Saint Lucia	■				
Cyprus	■		Kuwait	■	■	Saint Vincenta and the Grenadines	■				
			Latvia	■	■	San Marino	■				

Product Reference	■ Region 1 = WEST-MEA	■ Region 2 = CIS	■ Region 3 = EASTIC	■ Region 4 = LATAM	■ Region 5 = EMEA
66140XNL-HCB	4052899993013	4052899993037	4052899993051	-	-
66240XNL-HCB	4052899992894	4052899992917	4052899992931	-	-
66340XNL-HCB	4052899993099	4052899993112	4052899993136	-	-
66440XNL-HCB	4052899993174	4052899993198	4052899993211	-	-
66140CBI-HCB	4052899431577	4052899431621	4052899431645	-	-
66240CBI-HCB	4052899431683	4052899431706	4052899431720	-	-
66340CBI-HCB	4052899431768	4052899431782	4052899431812	-	-
66440CBI-HCB	4052899431850	4052899431874	4052899431898	-	-
66140ULT-HCB	4052899429598	4052899429611	4052899429635	-	-
66240ULT-HCB	4052899429659	4052899429673	4052899429697	-	-

Product Reference	Region 1 = WEST-MEA	Region 2 = CIS	Region 3 = EASTIC	Region 4 = LATAM	Region 5 = EMEA
66340ULT-HCB	4052899429710	4052899429734	4052899429758	-	-
66440ULT-HCB	4052899429772	4052899429796	4052899429819	-	-
66140CBB-HCB	4052899439184	4052899439207	4052899439221	-	-
66240CBB-HCB	4052899441026	4052899441040	4052899441064		
66340CBB-HCB	4052899527560	4052899527584	-	-	-
66440CBB-HCB	4052899527522	4052899527546	-	-	-
64150NBS-HCB	4052899992252	4052899992276	4052899992290	4052899992238	-
64193NBS-01B	4052899992450	4052899992474	4052899992498	-	-
64193NBS-HCB	4052899992337	4052899992351	4052899992375	4052899992313	-
64210NBS-01B	4052899992511	4052899992535	4052899992559	-	-
64210NBS-HCB	4052899992719	4052899992733	4052899992757	4052899992696	-
64211NBS-HCB	4052899992818	4052899992832	4052899992856	4052899992795	-
64150CBI-01B	4008321655424	4052899411418	4052899411432	4052899411395	-
64150CBI-HCB	4008321650719	4052899412880	4052899412965	4052899412804	-
64193CBI-01B	4008321651280	4052899410794	4052899410817	4052899410718	-
64193CBI-HCB	4008321650733	4052899413061	4052899413108	-	-
64210CBI-01B	4008321651563	4052899410831	4052899410855	-	-
64210CBI-HCB	4008321650757	4052899413047	4052899413085	-	-
64212CBI-HCB	4052899931077	4052899412903	4052899412989	4052899412828	-
64211CBI-HCB	4008321650771	4052899412927	4052899413009	4052899412842	-
64176CBI-HCB	4052899982208	4052899982192	4052899982185	-	-
64219CBI-HCB	4052899268357	4052899412941	4052899413023	4052899412866	
9005CBI-HCB	4008321660282	4052899413641	4052899413726	4052899413566	-
9006CBI-HCB	4008321660305	4052899413665	4052899413740	4052899413580	-
2825HCB-02B	4008321650870	4052899418646	4052899418660	4052899418622	-
2827DC-02B	4008321972750	4052899417939	4052899417953	4052899417915	-
7507DC-02B	4008321972774	4052899417991	4052899418011	4052899417977	-
7507LDA-02B	-	4052899418707	-	4052899418684	-
7508LDR-01B	4008321376848	4052899418516	4052899418530	4052899418493	-
7538LDR-01B	4008321376862	4052899418578	4052899418592	4052899418554	-
64150ULT-01B	4008321416100	4052899412156	4052899412170	-	-
64150ULT-HCB	4008321416162	4052899425163	4052899425187	4052899987043	-
64193ULT-01B	4008321416124	4052899425125	4052899425149	-	-
64193ULT-HCB	4008321416186	4052899425200	4052899425224	4052899513198	-
64210ULT-01B	4052899436534	4052899436152	4052899436237	-	-
64210ULT-HCB	4052899436558	4052899436213	4052899436251	4052899513211	-
64211ULT-01B	4052899436473	4052899436114	4052899436176	-	-
64211ULT-HCB	4052899436510	4052899436138	4052899436190	-	-
7506ULT-02B	4008321415141	4052899419469	4052899419483	-	-
7507ULT-02B	4008321415165	4052899419506	4052899419520	-	-
7528ULT-02B	4008321415288	4052899419582	4052899419605	-	-
2825ULT-02B	4008321415189	4052899419322	4052899419346	-	-
5007ULT-02B	4008321415202	4052899419308	4052899419384	-	-
5008ULT-02B	4008321415226	4052899419421	4052899419445	-	-
6418ULT-02B	4008321415240	4052899419629	4052899419643	-	-
64132ULT-02B	4008321415325	4052899419667	4052899419681	-	-
7506-02B	-	-	-	4052899402034	4050300925448
7507-02B	-	-	-	4052899531178	4050300925462
7225-02B	-	-	-	4052899402119	4050300925547
7528-02B	-	-	-	4052899402171	4050300925523

Product Reference	Region 1 = WEST-MEA	Region 2 = CIS	Region 3 = EASTIC	Region 4 = LATAM	Region 5 = EMEA
3893-02B	-	-	-	4052899407381	4050300647609
2821-02B	-	-	-	4052899418813	4050300925745
2825-02B	-	-	-	4052899418837	4050300925684
2827NA-02B	-	-	-	4052899570870	4052899570894
921-02B	-	-	-	4052899406933	4008321349507
7505-02B	-	-	-	4052899417878	4052899324565
7515-02B	-	-	-	4052899417892	4052899324589
2721-02B	-	-	-	4052899418790	4050300925769
2722-02B	-	-	-	4052899407251	4050300925783
5007-02B	-	-	-	4052899407015	4050300925585
5008-02B	-	-	-	4052899407176	4050300925608
6411-02B	-	-	-	4052899418936	4050300925646
64111-02B	-	-	-	-	4050300647258
6418-02B	-	-	-	4052899418950	4050300925622
6438-02B	-	-	-	-	4008321185389
64155TSP-HCB	4008321784209	4052899413931	4052899414037	4052899413832	-
64156TSP-01B	4052899481930	4052899481916	4052899481893	4052899481954	-
64156TSP-HCB	4008321784292	4052899413955	4052899414051	4052899413856	-
64196TSP-HCB	4008321785077	4052899413979	4052899414075	4052899413870	-
64215TSP-HCB	4008321785145	4052899413917	4052899414013	4052899413818	-
64216TSP-HCB	4052899904644	4052899413993	4052899414099	4052899413894	-
3930TSP-02B	4008321174055	-	-	-	-
64155-01B	-	-	-	4052899412101	4050300925844
64156-01B	-	-	-	4052899412125	4050300565811
64196-01B	-	-	-	4052899411883	4050300925868
64215-01B	-	-	-	4052899411845	4050300925882
7511-02B	-	-	-	-	4050300925929
7537-02B	-	-	-	4052899402232	4050300925943
5627-02B	-	-	-	4052899418882	4050300925967
5637-02B	-	-	-	-	4050300926049
3930-02B	-	-	-	-	4050300926001
2841-02B	-	-	-	4052899407275	4050300926025
2845-02B	-	-	-	4052899407329	4008321139962
6423-02B	-	-	-	-	4050300925981
64193NR1-01B ¹⁾	4052899929654	4052899411227	4052899411104	4052899411166	-
64210NR1-01B ¹⁾	4052899929593	4052899411203	4052899411081	4052899411142	-
64212NR1-01B ¹⁾	4052899389403	4052899451285	4052899451308	-	-
64211NR1-01B ¹⁾	4052899253728	4052899411241	4052899411128	4052899411180	-
64185NR9-01B ¹⁾	4052899253452	4052899408302	4052899408326	-	-
64193NR5-01B ¹⁾	4052899929524	4052899411289	4052899411340	-	-
64210NR5-01B ¹⁾	4052899929470	4052899411265	4052899411326	-	-
64211NR5-01B ¹⁾	4052899253742	4052899411302	4052899411364	-	-
64185NR5-01B ¹⁾	4052899929425	4052899984318	4052899984332	-	-
64193XR-01B ¹⁾	4052899253681	4052899412385	4052899412460	4052899412224	-
64210XR-01B ¹⁾	4052899253704	4052899412309	4052899412446	4052899412200	-
64211XR-01B ¹⁾	4052899936591	4052899412422	4052899412507	4052899412262	-
64212XR-01B ¹⁾	4052899253667	4052899412408	4052899412484	4052899412248	-
64185XR-01B ¹⁾	4052899253490	4052899408371	4052899408395	4052899408357	-
64327XR-01B ¹⁾	4052899936607	4052899409613	4052899409637	4052899409590	-

Product Reference	■ Region 1 = WEST-MEA	■ Region 2 = CIS	■ Region 3 = EASTIC	■ Region 4 = LATAM	■ Region 5 = EMEA
64327-01B	-	-	-	4052899409576	4052899929692
64185-01B	-	-	-	4052899408418	4052899253513
62150CBB-HCB	4052899439764	4052899437678	4052899436930	4052899439009	-
62193CBB-HCB	4052899439788	4052899437654	4052899437296	4052899439023	-
62210CBB-HCB	4052899439801	4052899437692	4052899437371	4052899439047	-
62211CBB-HCB	4052899439849	4052899437715	4052899437395	4052899439085	-
62213CBB-HCB	4052899439863	4052899437739	4052899437487	4052899439108	-
69005CBB-HCB	4052899439887	4052899437753	4052899437524	4052899439122	-
69006CBB-HCB	4052899439900	4052899437777	4052899437548	4052899439146	-

1) These products will be discontinued. More information will follow soon.

LEDiving® Headlight lamps – Overview of LED forward lighting applications



LEDiving® SL – Exterior front lighting ¹⁾											
1		2		3		4		5		6	
Low beam / High beam		Daytime running light		Fog light		Front indicator		Parking/ marker light / Position light		Side indicator	
≅ H4, H7, H11, HB4		≅ H7, H8/H11/H16, PS13W, PS19W, P21W, P21/5W, P27/7W, W16W, W21W, W21/5W		≅ H8/H11/H16, H10		≅ P21W, P21/5W, PY21W, P27W, P27/7W, W21W		≅ P21/5W, P27/7W, W5W, W21W, W21/5W		≅ P21W, WY5W	
P43t		PX26d		PGJ19		BA15s		BAY15d		BA15s	
PX26d		PGJ19		PY20d		BAY15d		W2.5x16q		W2.1x9.5d	
PGJ19-2		PG18.5d-1		PSX24W		BAU15s		W2.1x9.5d			
P22d		PG20-1				W2.5x16q		W3x16d			
		BA15s				W3x16d		W3x16q			
		BAY15d									
		W2.5x16q									
		W2.1x9.5d									
		W3x16d									
		W3x16q									
Canbus Control Unit 50 W ²⁾		Canbus Control Unit 21 W ²⁾		Canbus Control Unit 5 W ²⁾							

LED Color	Use behind red glass	Use behind clear glass	Use behind amber glass
Red (Tail light, Brake light)	Yes	Not recommended	Not recommended
White (Daytime running light, Reversing light, License plate light, Parking light)	Not recommended	Yes	Not recommended
Amber (Indicator light, Side marker light)	Not recommended	Yes	Yes



LEDDriving® SL – Exterior rear lighting ¹⁾													
	1		2		3		4		5		6		7
Rear indicator		License plate light		Brake light, Third braking light		Rear fog light		Tail light		Reversing light		Additional brake light	
≅ P21W, PY21W, P27/7W, W21W		≅ C5W, P21W, P21/5W, W5W		≅ P21W, P21/5W, P27/7W, W5W, W21W, W21/5W		≅ P21W, P21/5W, P27/7W, W16W, W21W		≅ P21W, P21/5W, P27/7W, W5W, W21W, W21/5W		≅ P21W, P27/7W, W16W, W21W		≅ P21W, P21/5W, P27/7W, W5W, W21W, W21/5W	
BA15s		SV8.5-8 (31, 36, 41mm)		BA15s		BA15s		BA15s		BA15s		BA15s	
BAU15s		BA15s		BAY15d		BAY15d		BAY15d		W2.5x16q		BAY15d	
W2.5x16q		BAY15d		W2.5x16q		W2.5x16q		W2.5x16q		W2.1x9.5d		W2.5x16q	
W3x16d		W2.1x9.5d		W2.1x9.5d		W2.1x9.5d		W2.1x9.5d		W3x16d		W2.1x9.5d	
				W3x16d		W3x16d		W3x16d				W3x16d	
				W3x16q				W3x16q				W3x16q	
Canbus Control Unit 21W ²⁾ 						Canbus Control Unit 5W and 21W ²⁾ 							

Available color options:

LEDDriving® SL

-  Cool White
  Red
-  Amber

1) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.

2) LEDDriving® CANBUS CONTROL UNIT (P.32) avoids error messages on the board computer when using LED lamps within 5 W, 21 W or 50 W applications

LEDDriving® Interior Lamps – Overview of LED interior lighting applications







LEDDriving® SL – Interior lighting ¹⁾																							
1		2		3		4		5		6		7		8		9		10					
Dome light front		Reading light front		Dome light behind		Reading light behind		Glovebox light		Trunk light		Legroom light		Door/Side light		Engine compartment light		Make-up mirror/visor light					
≅ W5W, C5W, T4W								≅ W5W, WY5W, C5W, T4W								≅ W5W, WY5W, C5W, T4W							
W2.1x9.5d		W2.1x9.5d		W2.1x9.5d		W2.1x9.5d		W2.1x9.5d		W2.1x9.5d		W2.1x9.5d		W2.1x9.5d		W2.1x9.5d		W2.1x9.5d					
SV8.5-8 (31, 36, 41mm)		SV8.5-8 (31, 36, 41mm)		SV8.5-8 (31, 36, 41mm)		SV8.5-8 (31, 36, 41mm)		SV8.5-8 (31, 36, 41mm)		SV8.5-8 (31, 36, 41mm)		SV8.5-8 (31, 36, 41mm)		SV8.5-8 (31, 36, 41mm)		SV8.5-8 (31, 36, 41mm)		SV8.5-8 (31, 36, 41mm)					
BA9s		BA9s		BA9s		BA9s		BA9s		BA9s		BA9s		BA9s		BA9s		BA9s					

Canbus Control Unit 5W 

Available color options:

LEDDriving® SL



Cool White



Red



Amber

1) These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.

Dome light front

C5W ● T4W W5W ● ●

Engine compartment light

C5W ● P21W ● R10W ● W5W ● ●

Glovebox

C5W ● R5W ● T4W W2.3W W3W W5W ● ●

Legroom

C5W ● W3W W5W ● ●

Reading lamp front

C5W ● H6W ● R5W ● R10W ● T4W W5W ● ●

Make-up mirror

C5W ● W5W ● ●

Door lamp

C5W ● R5W ● W3W W5W ● ●

Dome light behind

C5W ● H6W ● R5W ● R10W ● T4W W5W ● ●

Reading lamp behind

C5W ● T4W W5W ● ●

Trunk lamp

C5W ● P21W ● R5W ● R10W ● T4W W3W W5W ● ●

UPGRADE

HALOGEN LIGHTING


- **COOL BLUE® INTENSE** (page 43)
 - Bluish-white light for xenon look
- **ULTRA LIFE** (page 46)
 - 4-year guarantee¹⁾

1) 4th year with online product registration. Refer to www.osram.com/am-guarantee for precise conditions and registration

Low beam / High beam



Side indicator

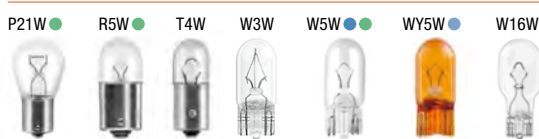

Front indicator



Daytime running light



Fog light



Parking/marker light



UPGRADE

HALOGEN LIGHTING

- **NIGHT BREAKER® LASER** (page 41)
 - Up to 150% more brightness¹⁾
- **NIGHT BREAKER® SILVER** (page 42)
 - Up to 100% more brightness¹⁾
- **COOL BLUE® INTENSE** (page 43)
 - Bluish-white light for xenon look

- **DIADEM® CHROME** (page 44)
 - Only amber when ON
- **DIADEM®** (page 44)
 - Red or amber when ON
- **ULTRA LIFE** (page 46)
 - 4-year guarantee²⁾

Brake light / Third braking light**Rear indicator****Tail light****License plate light****Rear fog light****Reversing light****XENON LIGHTING**

● **XENARC® NIGHT BREAKER® LASER** (page 35)

— Up to 200% more brightness³⁾

● **XENARC® COOL BLUE® INTENSE** (page 36)

— Extra blue light⁴⁾

● **XENARC® ULTRA LIFE** (page 37)

— 10-year guarantee⁵⁾

1) Compared to minimum ECE R112 requirements

2) 4th year with online product registration. Refer to www.osram.com/am-guarantee for precise conditions and registration

3) Compared to minimum ECE R98 requirements

4) From a special filling system instead of conventional coating

5) With online product registration. Refer to www.osram.com/am-guarantee for precise conditions and registration

Parking/marker light



Side indicator



Front indicator




Side-marker light



License plate light




Low beam / High beam

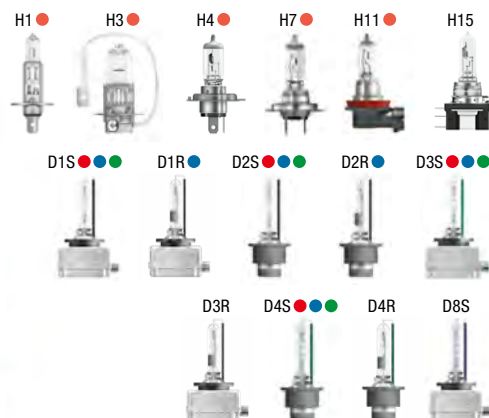

Daytime running light




Fog light



Parking/marker light



Indicator/brake/rear fog/tail and reversing light



UPGRADE

HALOGEN LIGHTING

- **TRUCKSTAR® PRO** (page 53)
- Up to 100% more brightness¹⁾

- 1) Compared to minimum ECE R112 requirements
- 2) Compared to minimum ECE R98 requirements
- 3) From a special filling system instead of conventional coating
- 4) With online product registration. Refer to www.osram.com/am-guarantee for precise conditions and registration

XENON LIGHTING

- **XENARC® NIGHT BREAKER® LASER** (page 35)
- Up to 200% more brightness²⁾
- **XENARC® COOL BLUE® INTENSE** (page 36)
- Extra blue light³⁾
- **XENARC® ULTRA LIFE** (page 37)
- 10-year guarantee⁴⁾

Low beam / High beam / Fog light



Front indicator / parking/marker light



License plate light



Reversing/brake/rear fog light



Rear indicator



HALOGEN LIGHTING

- **NIGHT RACER® 110 (page 60)**
— Up to 110% more brightness¹⁾
- **NIGHT RACER® 90 (page 60)**
— Up to 90% more brightness¹⁾
- **NIGHT RACER® 50 (page 60)**
— Up to 50% more brightness¹⁾


- **X-RACER® (page 62)**
— Bluish-white light for xenon look
- **DIADEM® CHROME (page 44)**
— Only amber when ON
- **DIADEM® (page 44)**
— Red or amber when ON

- **ULTRA LIFE (page 46)**
— 4-year guarantee²⁾

1) Compared to minimum ECE R112 requirements

2) 4th year with online product registration. Refer to www.osram.com/am-guarantee for precise conditions and registration

Base stamp

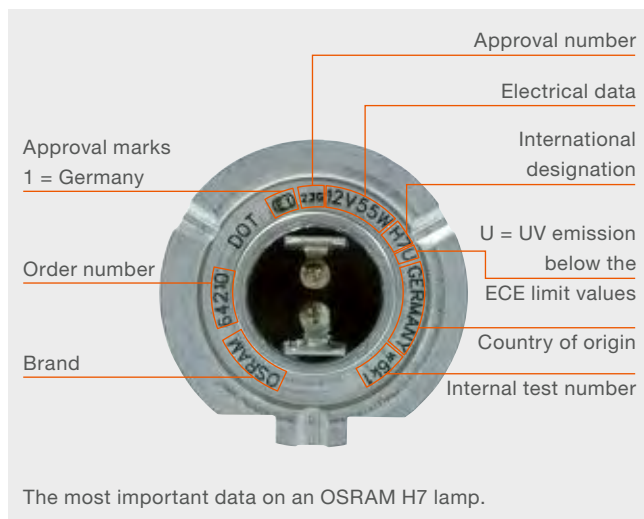

Notes on product labeling



Lamps per Product number



Any manipulation of our products or packaging, including but not limited to modification, reworking or restamping, is prohibited and infringes our registered trademark rights. Such modifications may impair the technical properties of our products, destroy them or cause consequential damage or injury, for which OSRAM cannot under any circumstances be held responsible. For more information on our products, go to: www.osram.com


Glossary of the most important lighting terms

Luminous flux Φ

Unit of measurement: lumen [lm]

Luminous flux Φ is the total radiated power emitted by a light source evaluated with the spectral sensitivity of the eye and the photometric radiation equivalent K_m .

Luminous flux Φ is the luminous intensity I emitted in the entire solid angle Ω .

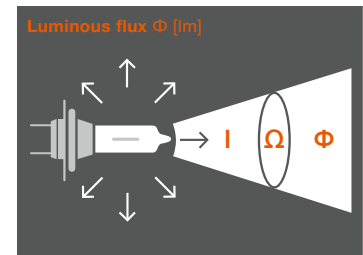


Luminous intensity I

Unit of measurement: candela [cd]

Generally speaking, a light source emits its luminous flux Φ in different directions and at different intensities.

Luminous intensity is the luminous flux radiated in a specific direction (solid angle Ω).


Polar diagram.

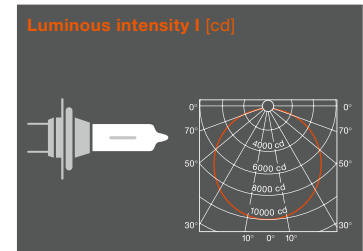

Illuminance E

Unit of measurement: lux [lx]


Illuminance E is the ratio between the luminous flux and the area illuminated. An illuminance of 1 lx occurs when a luminous flux of 1 lm is evenly distributed over an area of 1 m².

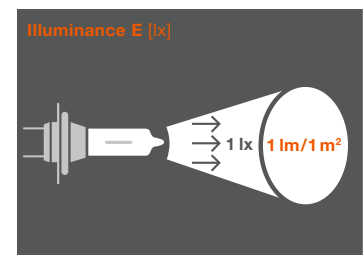

Luminance L

Unit of measurement: candela per square meter [cd/m²]

The luminance L of a light source or an illuminated area is a measure of the impression of brightness.

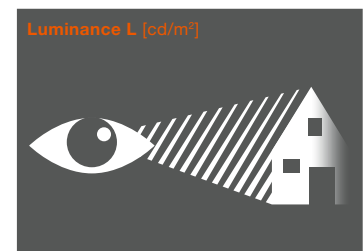

Luminous efficacy η

Unit of measurement: lumens per watt [lm/W]

Luminous efficacy η indicates the efficiency with which the electrical power consumed is converted into light.

Color temperature

Unit of measurement: Kelvin [K]

The color temperature of a light source is defined in comparison with a "black body radiator" and plotted on what is known as the "Planckian curve." The higher the temperature of this black body radiator is, the greater the blue component in the spectrum and the smaller the red component.

Lamp life


The B_3 life-span value represents the premature failure rate of lamps. This means that 3% of all tested lamps will have failed after this number of burning hours.

The T_c lifespan value represents the failure rate of 63.2% of the lamps.

Symbols

ECE	Int. category label ECE
W	Rated wattage in watts
W_{In}	Power consumption in watts
V	Voltage in volts
V_{Test}	Test voltage in volts
lm	Luminous flux in lumens
T[h] B3/Tc	Lifespan (h)
lx	Illuminance in lux
λ [nm]	Wavelength (λ)
K	Color temperature in K
 COLOR	Light color
i	Information
	Base
 No.	Fig. no.
KIT	Set
 w [mm]	Width b in mm
 h [mm]	Height h in mm
 l [mm]	Length l in mm
	Shipping unit
	Single packaging

Packaging variants

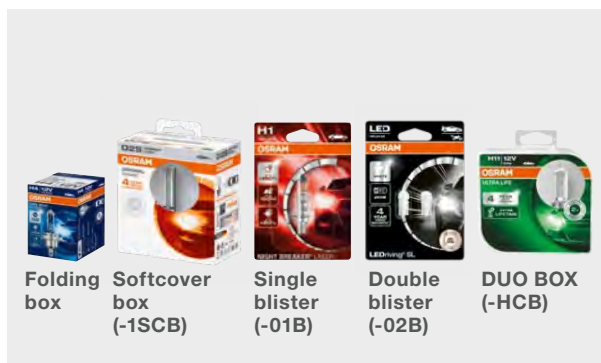

Always up to date!
Download the latest OSRAM
Automotive catalog here:

www.osram.com/am-catalog-digital



Which lamps fit your vehicle?
Find out with our Vehicle Lamp Finder
online app:

www.osram.com/vehiclelamps



Stay up to date!
Follow OSRAM Automotive on Facebook:

www.facebook.com/osramautomotive




Get inspired and take your car to the next
level! Follow us on Instagram:

www.instagram.com/osram.automotive




OSRAM is the world market leader in automotive lighting. Our customers include the world's foremost automobile manufacturers. Half of all passenger vehicles manufactured globally each year are equipped with OSRAM lights.

OSRAM SITES

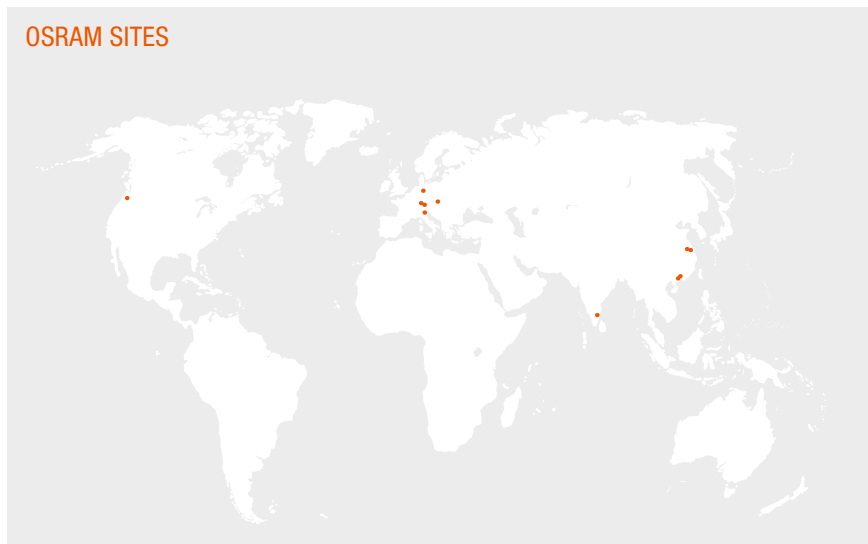

Light range 2020/2021 – always up-to-date

Download the pdf of our current catalog that's constantly updated. www.osram.com/am-catalog-digital



OSRAM GmbH

Head office:

Marcel-Breuer-Strasse 6
80807 Munich, Germany
Phone +49 89 6213-0
Fax +49 89 6213-2020
www.osram.com

OSRAM